

03/31/99 JC649 U.S. PTO

PATENT

Docket No.3701-4000

Express Mail Label No. EJ607480444US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and
Address(es):

Jes Broeng, Norgaardsvej 22B, 1. tv, DK-2800, Lyngby, Denmark

Stig Eigil Barkou, Lyngbyvej 431 B, 1. tv, DK-2820, Gentofte, Denmark

Anders Overgaard Bjarklev, Ørebjergvej 5, Gundsomagle, DK-4000, Roskilde,
Denmark

Title A PHOTONIC BAND GAP FIBER

Enclosed are:

[X] 53 page(s) of specification, 1 page(s) of Abstract, 24 page(s) of claims

[X] 82 sheets of drawing [] formal [X] informal

[] page(s) of Declaration and Power of Attorney

[] Unsigned

[] Newly Executed

[] Copy from prior application

[] Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

[] Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the combined declaration and power of attorney is supplied herein, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

[] Microfiche Computer Program (Appendix)

[] page(s) of Sequence Listing

[] computer readable disk containing Sequence Listing

[] Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

[] Claim for Priority

[] Certified copy of Priority Document(s)

JC135 U.S. PTO
09/282303
03/31/99

- ☐ English translation documents
- ☒ Information Disclosure Statement
- ☐ Copy of ____ cited references
- ☐ Copy of PTO-1449 filed in parent application serial No. _____.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ Charge Fee(s) to Deposit Account No. 13-4500. Order No. _____. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- ☐ Assignment papers filed in parent application Serial No. _____.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☒ Priority of Dutch Application No. DK PA 1998 00779, filed on June 9, 1998 is claimed under 35 U.S.C. § 119.
- ☐ Cancel in this application original claims _____ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until _____.
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)


	Number Filed		Number Extra	Rate	Basic Fee
Total Claims	135	-20=	115	x\$18.00	\$ 2070.00
Independent Claims	11	- 3=	8	X\$78.00	\$ 624.00
Multiple Dependent Claims	<input type="checkbox"/> yes		Additional Fee =	\$260.00	\$0
	<input checked="" type="checkbox"/> no		Add'l Fee =	NONE	

Total: \$ 3454.00

- ☒ A statement claiming small entity status is attached or will be filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$1727.00.
- ☒ A check in the amount of \$ 1727.00 in payment of the application filing fee is attached.
- ☐ Charge Fee(s) to Deposit Account No. 13-4500. Order No.3701-4000. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- ☒ The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 3701-4000. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

By: 
Walter Hanchuk
Registration No. 35,179

Dated: March 31, 1999

CORRESPONDENCE ADDRESS:
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

FORM: UTL-TRAN.NY
Rev. 11/13/98

UNITED STATES PATENT APPLICATION

FOR

A PHOTONIC BAND GAP FIBER

BY

Jes Broeng
Stig Eigil Barkou
Anders Overgaard Bjarklev

Express Mail Label No.
EJ607480444US

A PHOTONIC BAND GAP FIBRE

FIELD OF INVENTION

5

The present invention relates to a novel group of cladding designs, especially for use in optical fibres, wherein a larger photonic band gap may be provided while retaining the stability and physical properties of the fibre.

10 BACKGROUND OF THE INVENTION

Optical fibres and integrated optical waveguides are today applied in a wide range of applications within areas such as optical communications, sensor technology, spectroscopy, and medicine. These waveguides normally operate by guiding the
15 electromagnetic field (the light or the photons) through a physical effect, which is known as total internal reflection. By using this fundamental effect, the propagation (or loss) of optical power in directions perpendicular to the waveguide axis is reduced.

In order to obtain total internal reflection in these waveguides, which are often fabricated
20 from dielectric materials (in optical fibres) or semiconductors (in integrated optics), it is necessary to use a higher refractive index of the core compared to the refractive index of the surrounding cladding.

Today the preferred signal transmission medium over long and medium distances is the
25 optical fibre, and total internal reflection is, consequently, a physical property, which has been known and used in technological development for decades. During the past ten years, however, the development within the area of new materials has opened up the possibilities of localisation of light or control of electromagnetic fields in cavities or waveguides by applying a completely new physical property - the so-called photonic band
30 gap (PBG) effect.

The PBG effect may be introduced by providing a spatially periodic lattice structure, in which the lattice dimensions and applied materials are chosen in such a way that electromagnetic field propagation is inhibited in certain frequency intervals and in certain
35 directions. These PBG materials have been described in one-, two-, and three-dimensional

cases in the scientific literature and in several patents (see for instance US-Patent no. 5386215, US-Patent no. 5335240, US-Patent no. 5440421, US-Patent no. 5600483, US-Patent no. 5172267, US-Patent no. 5559825).

- 5 A specific class of components, which makes use of such periodic dielectric structures, are the optical fibres (or waveguides), in which the periodic variation appears in directions perpendicular to the waveguide axes, whereas the structures are invariant along the waveguide axes.
- 10 Within recent years, especially researchers from University of Bath, UK, (see e.g. Birks et al., Electronics Letters, Vol.31 (22), p.1941, October 1995) have presented such fibres realised by having a silica core surrounded by thin, parallel, and air-filled voids in a silica-background material, and organising the air-filled voids in a triangular structure in the cladding region of the fibres. These optical fibres have demonstrated interesting
- 15 propagation properties compared to standard optical fibres utilising total internal reflection.

- It may be a problem or disadvantage of this particular realisation of optical fibres with periodic dielectric cladding regions that careful stacking of either hexagonal glass tubes (with central holes) or direct stacking of thin circular tubes is required. These tubes have
- 20 been arranged in a triangular structure in a preform, where after the preform is drawn into an optical fibre. Although these fibres according to the reports in the international literature show quite specific and new optical properties, one of the problems has been that the core of the fibre could only be formed by introduction of a glass rod without a central hole.
 - 25 It is a further disadvantage that even these new fibres have core areas with higher refractive index than the average refractive index of the surrounding media, and their waveguiding effect may, consequently, also be described by conventional total internal reflection. This naturally has the consequence that for applications within areas such as optical sensors, where it may be of specific interest to be able to localise optical fields in
 - 30 and around areas with low refractive indices (e.g., around air-filled channels), the presently known fibres may not be used directly.

- It is a still further disadvantage that, due to the triangular cladding structure, the PBG of the structures described by Birks et al. are not optimised for guiding electromagnetic radiation
- 35 using the PBG effect.

US 5,802,236 discloses micro-fabricated optical fibres having a core and a cladding region, wherein the cladding region comprises a multiplicity of spaced apart cladding features that are elongated in the direction of the fibre. The effective refractive index of the cladding
5 region is less than the effective refractive index of the core region. Furthermore, the elongated features in the cladding are arranged in a non-periodic structure.

It is a disadvantage of the micro-fabricated optical fibre disclosed in US 5,802,236 that due to the high-index core region the waveguiding characteristics are based on traditional total
10 internal reflection of the electromagnetic radiation guided in the core region.

WO 99/00685 discloses a large core photonic crystal fibre (PCF) comprising a cladding having a triangular periodic structure. The core region may be either a high-index or low-index region having a diameter of at least 5 μm . In a preferred embodiment the core region
15 may be as large as 50 μm in diameter. With such a diameter, the fibre is capable of transmitting high powers, whilst maintaining single-mode operation.

It is a disadvantage that the triangular cladding structure disclosed in WO 99/00685 will not, using realistic manufacturing parameters, provide a sufficient PBG so as to effectively
20 confine visible or NIR electromagnetic radiation within the core region of the fibre.

It is a further disadvantage of the structure disclosed in WO 99/00685 that in order to obtain a sufficient PBG, the dimensions of the features forming the triangular periodic structure must be very large. Such large features, e.g. air-filled holes, make the structure
25 difficult to manufacture and inconvenient for practical applications.

It is an object of the present invention to provide a new class of optical waveguides, in which waveguiding along one or more core regions is obtained through the application of the PBG effect.
30

It is a further object of the present invention to provide a two-dimensional lattice structure capable of providing complete PBG's for realistic manufacturing parameters.

It is a still further object of the present invention to provide low-index core PBG
35 waveguiding structures.

It is a still further object of the present invention to provide a PBG structure, which is easy to manufacture.

SUMMARY OF THE INVENTION

5

The present inventors have realised that the photonic band gap of an optical fibre, which cladding structure is typically formed as two-dimensionally periodic low index areas within a given material, may be defined as a number of high index areas separated by the low index areas forming the periodic structure. The performance of the optical band gap may be increased, if these high index areas are "separated" from each other. These areas couple via areas ("bridges") between the low index areas, and this "separation" may be obtained in a number of areas.

10

In the following, naturally a periodic structure will be defined by a primitive unit cell, as is the most widely used manner of simplifying the analysis of such a structure. However, the actual shape and contents of this cell may vary in relation to a structure more intuitively correct in analysing the high index areas. To that effect, we will make use of a polygon, which will be defined by low index areas but will normally define the position of a high index area.

15

20

It should be noted that many sizes of unit cells will exist but only one of a primitive unit cell which is defined as a unit cell which has the smallest area possible and which, only by translation, can generate the structure. Naturally, a given periodic structure may have a plurality of primitive unit cells.

25

In the following, the structure is defined by a unit cell, which will be identical to a primitive unit cell.

In a first aspect, the invention relates to a separation where additional low index areas are provided in addition to those elements normally defining the periodic structure.

30

Thus, in this first aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

35 - a core region extending along the longitudinal direction.

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, wherein, for each unit cell:

10

- a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, and
- one or more further elongated elements are provided each of which
 - has an area not exceeding 1/6 of the area of that primary element having its centre within the unit cell and having the largest area,
 - has a refractive index being lower than that of any material adjacent thereto,
 - has a centre not positioned outside the unit cell, and
 - does not cover the centre of the first circle.

20

In the present context, "substantially two-dimensionally periodic" will mean that it is desired to have an optimal periodicity, but that the manners of production will often alter this. In the prior art it is seen that when circular air holes (low index areas) are introduced into a preform of glass and subsequently drawn, the holes will obtain a not-circular shape which is a sign of this substantial periodicity.

25

Also, in the present context, the refractive index of the primary elements has to be lower than that of any material adjacent thereto, meaning that this actual change of index is that providing the periodic structure. This step is not dependent on changes of refractive indices outside the immediate area around the circumference of the primary elements. Naturally, this step may be different for all primary elements, but normally the material adjacent to the primary elements is the same throughout the structure - and so is that of the primary elements, whereby the step will be the same at all circumferences around the primary elements.

35

In this situation, the first circle will define a so-called high index area, even when the actual refractive index is that of all of the fibre (except for the primary elements).

In this situation, further low index areas may be provided. When positioned correctly, these
 5 will separate the high index areas in that the coupling via the bridges is reduced due to the bridges being narrowed in effective area or width even when increased in number.

The effect of the further elements will, naturally, depend on the size thereof. If the size is increased beyond that of 1/6 of that of the primary elements, they will have an effect of
 10 actually changing the periodicity and cell shape of the overall structure. However, it may be preferred that the one or more further elements each has an area not exceeding 1/8, such as an area not exceeding 1/10, such as an area not exceeding 1/12, such as an area not exceeding 1/15, such as an area not exceeding 1/30 of the area of that primary element having its centre not positioned outside the unit cell and having the largest area.

15 Instead of or in addition to the narrowing of the "bridges" in the structure, two high index areas may be separated by reducing the sizes thereof. The further elements may be used for that by positioning these in a specific manner: For the unit cell, a second circle is defined being the largest possible circle having its centre not positioned outside the unit
 20 cell, and wherein the second circle not comprising any parts of the primary or further elongated elements, and wherein the area of the second circle is smaller than that of the first circle. In that manner, the further elements act to reduce the size of the high index area and thereby to separate two adjacent high index areas.

25 Preferably, the area of the second circle is 90% or less, such as 80% or less, such as 70% or less, such as 60% or less, such as 50% or less, such as 40%, such as 30% or less or less than that of the first circle.

Even though the positioning of the further elements may easily be so that the centres of the
 30 first and second circles do not coincide, this would normally alter the symmetry of the structure and, thus, not be desired. Consequently, preferably the centre of first circle at least substantially coincides with the centre of the second circle.

The above-mentioned polygon, having three or more sides, is defined as having its vertices
 35 at the centres of those primary elements, parts of which are within a distance of 1.5 or less,

such as 1.2 or less, such as 1.1 or less times the radius of the first circle from the centre of the first circle.

Preferably, due to the periodicity of the structure, the polygon is a regular polygon. This
5 polygon may be a triangular, rectangular, quadratic, or hexagonal polygon.

Another manner of effecting the separation of the high index areas is to provide more low index areas than those used in the prior art.

10 Thus, in a second aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

15 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the elongated elements,

20

the periodic structure being defined, in a cross-section perpendicular to the longitudinal direction, by a unit cell, wherein the sum of all areas of elongated elements, which areas are comprised within the unit cell, is larger than 1.2 times the area of that primary element having its centre axis not positioned outside the unit cell and having the largest area.

25

As mentioned above, these areas may be used either for reducing the sizes of the high index areas or for reducing the coupling there between via the bridges between the primary elements of the periodic structure. Preferably, the size of the high index areas is as large as possible, so the mostly preferred manner is to narrow the bridges by introducing

30 additional low index areas between two high index areas.

Preferably, the sum of all areas of elongated elements comprised within the unit cell is larger than 1.3, such as larger than 1.4, such as larger than 1.5, such as larger than 1.75, such as larger than 2, such as larger than 2.5 times the area of that primary element

35 having its centre axis not positioned outside the unit cell and having the largest area.

An additional manner of separating the high index areas is to increase the index thereof. Thus, preferably the periodic structure comprises secondary elongated elements having a refractive index being larger than that of any material adjacent thereto and to any material being adjacent to a primary element.

In that manner, for a unit cell, the sum of all areas of secondary elements within the unit cell is preferably larger than 1, such as larger than 1.1, such as larger than 1.2, such as larger than 1.3, such as larger than 1.4, such as larger than 1.5, such as larger than 1.75, such as larger than 2, such as larger than 2.5 times the area of a secondary element having its centre axis not positioned outside the unit cell and having the largest area.

Also, for a unit cell, the sum of all areas of secondary elements within the unit cell is preferably larger than 0.05, such as larger than 0.1, such as larger than 0.5, such as larger than 1, such as larger than 2, such as larger than 5, such as larger than 8, such as larger than 10, such as larger than 15, such as larger than 20, such as larger than 25 times the area of the primary element having its centre axis not positioned outside the unit cell and having the largest area.

In addition to the separation of the high index areas, another manner of increasing the performance of the band gap structure is to provide more circular cells or polygons. The inventors have realised that the optimum structure is one which "looks the same for light coming from all angles" in the cross sectional plane perpendicular to the longitudinal axis of the fibre.

Therefore, in a third aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having.

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and where a polygon is defined:

- having centres of primary elements in its vertices,
- 5 - not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and
- having an area less than or equal to that of the unit cell,

wherein a first circle is defined as the smallest circle possible having its centre positioned
10 within the polygon, and which comprises the vertices of the polygon,

and wherein the area of the circle divided by the area of the polygon is less than 2.4, such as less than 1.5, such as less than 1.2.

15 For the known triangular structures, is relationship between the areas is 2.42. and for the preferred hexagonal 1.21.

in this context, the circle comprises the vertices of the polygon will mean that these vertices are within the circle or on the periphery thereof. When the polygon is a regular polygon, the
20 first circle is that circumscribing the polygon.

Typically, the polygon has four or more sides, and it may be quadratic or a hexagonal polygon.

25 Yet another manner of quantifying the separation of the high index areas will relate to the interaction of the refractive indices and the distance between the high index areas and the "sizes of the bridges".

Therefore, in a fourth aspect, the invention relates to an optical fibre with a waveguide
30 structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
 - a cladding region extending along the longitudinal direction, said cladding region
- 35 comprising an at least substantially two-dimensionally periodic structure comprising

primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

- 5 the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, wherein, for each unit cell:

$$n_d \Lambda_2 > n_{ud} \Lambda_1 (\sqrt{3})$$

where

- 10 - n_d is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,
- n_{ud} is a largest index of refraction not positioned outside the unit cell but positioned outside any of the first circles of the unit cells,
- 15 - Λ_1 is a smallest distance between centre axes of two primary elements within the periodic structure,
- Λ_2 is a smallest distance between the centres of two adjacent first circles.

- In this formula it is seen that the separation of high index areas may be effected by
- 20 narrowing the bridges, which may be obtained by providing more low index areas or providing a novel structure having a smaller distance by nature. Alternatively or in addition, the separation may be effected by physically separating the high index areas, such as is seen when going from the prior art triangular structure to the honeycomb structure. Also, an effective "separation" is seen when the high index area is, in fact, provided with a
- 25 refractive index higher than that of its surroundings.

- It should be understood that, naturally, the periodic structure only needs be that structure sufficient to confine light by the PBG effect. This distance may be 2-20 periods of the periodic structure - depending on the actual structure thereof. Outside that part of the fibre,
- 30 any structure or material may be provided.

In order to obtain an even better performance, it is preferred that, for each unit cell: $n_d \Lambda_2 > 2 n_{ud} \Lambda_1$, such as $n_d \Lambda_2 > 3 n_{ud} \Lambda_1$, such as $n_d \Lambda_2 > 4 n_{ud} \Lambda_1$, such as $n_d \Lambda_2 > 6 n_{ud} \Lambda_1$, such as $n_d \Lambda_2 > 10 n_{ud} \Lambda_1$.

Naturally, the more different materials in the fibre, the larger the complexity thereof. Thus, it may be desired that, in each unit cell, n_d is at least substantially identical to n_{ud} . However, the maximum index difference obtainable using materials standard in fibre manufacture may not be sufficient. In that situation, it may be desired that, in each unit cell, $n_d > n_{ud}$.

5

The present fibre may be made of any suitable material, and n_d and n_{ud} may consequently be chosen as a material having a refractive index in the interval from that of silica over polymers to semiconductors, that is, 1-10. A material standard in fibre manufacture is silica, whereby n_d and n_{ud} would normally be chosen in the interval 1.40-1.60 - naturally taking

10 into account the relationship between n_d and n_{ud}

As described above, it has been found that the introduction of additional low index areas will further separate the high index areas and provide a fibre with an improved performance. Thus, preferably, the unit cell comprises further elongated elements each
15 having a centre axis extending in the longitudinal direction of the waveguide, the cross-sectional area of each of the further elements being less than 1/6 of a cross-sectional area of that primary element, having its centre within the unit cell, having the largest cross-sectional area.

20 In that situation, it is advantageous that:

$$n_d \Lambda_2 > (\sqrt{3}) n_{ud} \Lambda_3$$

where

- 25 - n_d is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,
- n_{ud} is a largest index of refraction not positioned outside the unit cell but outside any of the first circles of the unit cells,
- 30 - Λ_3 is a smallest distance between centre axes of two primary or further elements within the periodic structure,
- Λ_2 is a smallest distance between the centres of two adjacent first circles.

Again, the better a separation, the better a performance, which means that it is preferred that, for each unit cell: $n_d \Lambda_2 > 2 n_{ud} \Lambda_3$, such as $n_d \Lambda_2 > 3 n_{ud} \Lambda_3$, such as $n_d \Lambda_2 > 4 n_{ud} \Lambda_3$, such as $n_d \Lambda_2 > 6 n_{ud} \Lambda_3$, such as $n_d \Lambda_2 > 10 n_{ud} \Lambda_3$.

5 Yet another manner of characterising the invention is one relating to the number of vertices or sides of the largest-area-polygons in the structure. In preferred fibres, these polygons are regular, whereby this number of sides or vertices will relate to the area thereof - and typically of an area or spacing of the high index areas.

10 Thus, in a fifth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

15 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

20

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, wherein, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements,

25

wherein more than 3 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

If the polygon is regular, the primary elements defining the polygon will be positioned just 30 outside the perimeter of the circle. However, production methods will introduce uncertainties and displacements, whereby the distance between the circle and the elements may be larger or smaller.

As mentioned above, both the circularity and the separation may be increased, if the 35 polygon is provided with more vertices than 3. Consequently, preferably more than 4, such

as more than 5, such as more than 6, such as more than 8, such as more than 10 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

- 5 Also, if the production methods provide a reasonable control over displacements etc. in the manufacturing process, preferably the parts of the first primary elements exist within a distance of 1.1 or less times the radius of the first circle from the centre of the first circle.

Also, depending on the structure and manufacturing method, the centres of the primary
10 elements may exist within the distance of 1.2 or less or 1.1 or less than the radius.

One manner of providing a certain number of first primary elements around a high index area will be to provide a polygon having the same number of vertices.

- 15 Another manner is one wherein certain first primary elements defining the vertices and others positioned along the sides thereof. In that situation, the first primary elements typically define a polygon having 3-6 sides and having centres of first primary elements in its vertices, each of the first primary elements not having centres in the vertices being positioned with its centre axis no further from a side of the polygon than $1/5$, such as $1/10$,
20 such as $1/15$ of a length of that side.

Another manner of separating two high index areas will be to, instead of or in addition to providing low index areas in addition to those defining the basic periodic structure, provide the primary elements defining the basic periodic structure with a cross sectional shape
25 increasing the separation between the high index areas.

Consequently, in a sixth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- 30 - a core region extending along the longitudinal direction.
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal

direction of the waveguide, each primary element having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,
 5 defined by a unit cell, and where, for each unit cell, one or more polygons are defined as:

- a first polygon is defined as having its vertices at centres of first primary elements selected by:
 - defining a first circle as the largest circular area possible having a centre not
 10 positioned outside the unit cell and not enclosing any part of any primary elements,
 - selecting the first primary elements as those having parts not positioned further away from the centre of the first circle than 1.2 times the radius of the first circle,
- for each area, if any, of the unit cell, which area is not comprised within a first
 15 polygon, an additional polygon is defined as having its vertices at centres of additional primary elements selected by:
 - defining an additional circle as the largest circular area possible having a
 centre not positioned outside the area and not enclosing any part of any primary
 elements,
 - selecting the additional primary elements as those having their centres not
 20 positioned further away from the centre of the additional circle than 1.2 times the radius of the additional circle,

the periodic structure comprising deviating primary elements having a shape deviating from
 25 a circular shape and having extending parts defined as those parts of the shape of the deviating primary element extending outside a circle having the same area as that of the deviating primary element and having its centre at a centre of the deviating primary element, each extending part extending toward one of those primary elements which together with which the deviating primary element defines a side of a polygon in the
 30 periodic structure,

each extending part extending toward a primary element and having an area being larger than 3 %, such as larger than 5%, such as larger than 10%, such as larger than 15%, such as larger than 20%, such as larger than 25% of the area of the circle.

In the present context, the centre of the deviating primary element will be a symmetrical centre of a centre of weight of the cross section thereof.

In the prior art, primary elements having a cross sectional shape deviating from that of a circle are known. However, those shapes have been inadvertent due to the methods of manufacture and often have a shape and direction detrimental to the periodicity of the structure and to the size of the band gap. The inventors have found that providing such shapes in the correct manner may increase the separation of the high index areas while maintaining the periodicity of the structure - in much the same manner as when providing additional low index areas along the circumference of the polygon.

Preferably, at least one extending part has an axis of symmetry at least substantially coinciding with a line intersecting the centre of the circle and the centre of a primary element with which the deviating primary element defines a side. In this manner, the extending part will point along the direction of a side of a polygon. The symmetry of the periodic structure may then especially be maintained, if all extending parts point in such directions.

Normally, such an axis of symmetry would be desirable, as the lack of a such will mean that the symmetry of the structure has been reduced. However manufacturing methods may render is slightly difficult to find this axis due to deformation of the extending part from the initially desired shape.

Intuitively, one would understand that the larger the portion of a polygon surrounding a high index area which is covered by low index areas, the better a separation of the high index areas. Thus, it is preferred that at least one extending part extends a distance of at least 5%, such as at least 10%, such as at least 15%, such as at least 20%, such as at least 30%, such as at least 50%, such as at least 75%, such as at least 100% of the radius of the circle and in a direction away from the centre of the circle

Again, a first circle may be defined as the smallest possible circle having its centre positioned within the first polygon, and which comprises the vertices of the first polygon, that is, the vertices are positioned within or on the boundary of the first circle.

Preferably, the first polygon has four or more sides, and most preferably, the first polygon is a hexagonal, regular polygon.

According to the invention, an especially preferred structure should be one that provides a
 5 good separation between the high index areas and is relatively circular. One such shape is a rectangular shape which also has the advantage that it may itself fully define a periodic structure - or it may take part thereof.

Thus, in a seventh aspect, the invention relates to an optical fibre with a waveguide
 10 structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region
 15 comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,
- 20 the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and wherein a polygon is defined:
 - having centres of primary elements in its vertices,
 - not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and
 - 25 - having an area less than or equal to that of the unit cell.

the polygon being a regular, hexagonal polygon.

In order to separate the high index areas even better, one or more further elongated
 30 elements are preferably provided each of which

- has an area not exceeding 1/6 of the area of that primary element having its centre within the unit cell and having the largest area,
- has a refractive index being lower than that of any material adjacent thereto,

35 wherein symmetry may be preserved, if:

- further elements of two polygons sharing a common side are positioned symmetrically around a centre of the common side, and
- further elements of two polygons sharing a single primary element are positioned symmetrically around a centre of the single primary element.

5

As mentioned above, if the further elements are provided with an area larger than $1/6$ of the area of that primary element having its centre within the unit cell (or at least not outside) and having the largest area, these further elements would reach a size where they would take part in the overall defining of the structure of the periodic structure - and thus be

10 primary elements

Preferably, the one or more further elongated elements each has an area not exceeding $1/8$, such as an area not exceeding $1/10$, such as an area not exceeding $1/12$, such as an area not exceeding $1/15$ of the area of that primary element having its centre not positioned

15 outside the unit cell and having the largest area.

One specifically preferred embodiment is wherein, in the periodic structure, regular hexagonal polygons exist, all sides of which are shared with another regular hexagonal polygon. This corresponds to a honeycomb structure defined solely by regular hexagonals.

20

Another preferred embodiment is one wherein the structure is defined by the regular hexagonal polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and wherein hexagonal polygons exist, each side of which is shared with a triangle. This is the so-called Kagomé structure.

25

In this second embodiment, the advantages of the hexagonal structure are maintained, and a further spacing of the high index areas defined in the hexagonals is provided via the triangles.

30 As mentioned above, another manner of obtaining an effective separation of the high index areas would be to increase the refractive index of such areas. Thus, in a number of the above aspects, it is preferred that the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a

35 centre axis extending in the longitudinal direction of the fibre.

Again, normally the material adjacent to the secondary elements would be the same as that adjacent to the primary elements.

- 5 In order to maintain the periodicity, it is desired that, for each unit cell, a secondary element is provided having its centre axis within the first circle, and more preferably that the secondary element is positioned so as to cover the centre of the first circle. Most preferably, the secondary element is positioned so as to have its centre axis at least substantially coincide with the centre of the first circle.

10

In an eighth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- 15 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being
- 20 lower than a refractive index of any material adjacent to the primary element,

the periodic structure further comprising secondary, elongated elements each having a refractive index being larger than that of any material adjacent thereto and any material adjacent to a primary element, each secondary element having a centre axis extending in

25 the longitudinal direction of the fibre.

Normally, the periodic structure is, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and

30 not enclosing any part of any primary elements, where a secondary element is preferably provided having its centre axis within the first circle.

As mentioned above, desirably the secondary element is provided so as to cover the centre of the first circle, and preferably, the secondary element is provided so as to have its

35 centre axis at least substantially coincide with the centre of the first circle.

Also, the polygon may be defined as follows: a plurality of first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle, a polygon being defined as having its vertices at the centres of the plurality of first primary elements. Preferably, the polygon is a regular, hexagonal polygon.

This hexagonal polygon may be used in either the honeycomb structure or the Kagomé structure.

10 All the above aspects of the invention relate to specific cladding structures and comprise no limitations what so ever on the core region.

In fact, the invention should be taken as one relating to these specific cladding regions for use in any type of optical fibre in combination with one or more cores or core regions of any type.

Normally, in relation to band gap structures, the core is taken as an area of the structure, where the periodicity of the band gap structure is broken. The band gap structure is designed so as to make light transmission impossible, and an altering of the periodicity will, consequently, make light transmission possible - but only in the core region.

A number of different manners exist for defining the core. One manner is to replace one or more elements of the periodic structure with other elements with different refractive indices, cross sectional areas or shapes. Another manner is to have the core also have a periodic structure where only one or more elements are not present.

Preferably, the core region would comprise a first additional elongated element extending in the longitudinal direction of the fibre.

30 An especially preferred first additional element is constituted by air or gas and being defined as a void in the material of the fibre, such as a void having a cross sectional area in the cross section being at least one, such as at least 2, such as at least 3, such as at least 4, such as at least 5, such as at least 6, such as at least 7, such as at least 8, such as at least 9, such as at least 10 times the cross sectional area of the unit cell.

In that situation, the light may propagate in and/or around air, which provides a number of advantages both as to transmission loss, dispersion, and when used e.g. as a sensor where gas or liquid may be provided within the void to obtain optimum overlap between the light and the gas or liquid.

5

In a number of different applications, the additional element or any material adjacent thereto may desirably comprise a dopant or a material showing higher order optical effects.

For communication purposes, higher order effects may be used for e.g. soliton

10 communication.

For applications for fibre lasers or fibre amplifiers, the dopant may be e.g. a rare earth dopant adapted to receive pump radiation and amplify radiation travelling in the core region.

15

Alternatively, the dopant may be a light sensitive dopant, such as Germanium or Deuterium. In that situation, the dopant may be used for e.g. optically writing a grating in the fibre or core region.

20 For sensor applications, the dopant may be a material responsive to a characteristic of a gas or liquid, which response may be detected optically by light travelling in the core region.

In a number of applications, it is preferred that the core region comprises a second
25 additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

In one application, one elongated element may be a void holding a liquid or gas which may
30 be too turbid for light to travel through. In that situation, the light may travel in the other element while still coupling with the liquid or gas due to the distance between the elements.

In this situation, one may choose to have the liquid or gas travel only in one or both additional elements - or even in all elongated voids, such as voids of the cladding structure.

35

Also, by providing two elements between which the light may couple, a number of optical devices may be provided, such as optical fibre couplers. The optical coupling between core elements or core regions may be designed so as to have a predetermined coupling at one or more defined wavelengths, which further makes a number of optical elements possible.

5

As indicated above, specific advantages will be obtained also when the second additional element is a void.

In fact, due to the periodic structure of the present fibre, the fibre may easily be made to
10 comprise a plurality of core regions.

These core regions may be provided sufficiently close for light travelling in one core region being able to couple to one or more core regions.

15 Alternatively, the core regions may be positioned spaced apart in order to provide a number of separate waveguides in a single fibre. In fact, the waveguides may be spaced sufficiently apart to the band gap structures surrounding each thereof to be different and e.g. be optimised for different wavelengths or wavelength regimes.

20 Preferably, the core regions are positioned symmetrically within the periodic structure, a period of the core regions being larger than a period of the periodic structure.

Naturally, a fibre of the present type may be used for a number of applications where fibres are already used today.

25

Thus, in a ninth aspect, the invention relates to a sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to the invention, wherein the core region
30 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be
35 determined,

- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

At present, the characteristic may be absorption, absorbance, the presence of a specific
5 agent or material in the gas or liquid, such as for use as a smoke detector, or any other characteristic sensed by an optical sensing method.

If the gas or liquid has a sufficiently low absorption at the wavelength of the light, the
introducing means may be adapted to introduce the light into the first additional element. In
10 that situation, an optimum overlap exists between the light and the liquid or gas.

Alternatively, the core region may comprise a second, elongated element extending in the
longitudinal direction of the fibre, where the first and second additional elements are
positioned at a distance where light travelling in one additional element is able to couple to
15 the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element. In that situation, the sensing takes place via the light extending from the second to the first element.

In another type of sensor, the characteristic may not be sensed directly by light. In that
20 situation, it may be desired to expose a suitable material to the characteristic, where the response of that material may be sensed optically. Thus, in this situation, at least part of an inner surface of the first additional element may comprise a layer of a material being adapted to alter in response to the characteristic of the gas or liquid, and wherein the introducing means is adapted to introduce light of a wavelength responsive to the altering
25 of the material.

Naturally, the sensor may additionally comprise means for providing the gas or liquid in the
fibre, such as for repeatedly providing gas or liquid therein, such as a gas pump if the
sensor is used as a smoke detector.
30

In a tenth aspect, the invention relates to a fibre amplifier for amplifying an optical
signal, said fibre amplifier comprising:

- a length of optical fibre according to the invention, wherein the core region
35 comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

- 5 Normally, fibre amplifiers will, further comprise means for spectrally separating the amplified optical signal from the pump signal, in order not to have pump radiation travelling in the fibre outside the amplifying region.

Especially for communication purposes, the dopant would comprise rare earth

- 10 ions, such as erbium

For other purposes, such as if it is desired to optically write gratings or other structures in the fibre or core region, or simply for increasing the refractive index of the core region, the dopant may comprise a photosensitive material, such as

- 15 germanium and/or deuterium.

In an eleventh aspect, the invention relates to a fibre laser for outputting laser radiation, said fibre laser comprising:

- 20 - a length of optical fibre according to any of the preceding claims, wherein the core region comprises a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

25

- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

- 30 Especially for communication purposes, the dopant comprises rare earth ions, such as erbium.

Also, the dopant may comprise a photosensitive material, such as germanium or deuterium, in order to facilitate e.g. the writing of gratings in the fibre or core region - or for increasing the refractive index of the core region.

5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a Honeycomb cladding structure with a two-dimensional periodicity

FIG. 2 shows a band diagram for a basic Honeycomb photonic crystal with a hole filling fraction of 30%. $k\Lambda$ is the normalised frequency, where k is the free-space wave number ($=2\pi/\lambda$). Λ is the distance between two neighbouring primary elements. The three high symmetry points of the Honeycomb crystal are indicated by O, M, and X.

FIG. 3 shows a two-dimensional modified Honeycomb-based photonic crystal. Two differently doped silica glasses are used as well as undoped fused silica. The silica type 1 represents a capillary tube, and type 2 a solid cane from which the Honeycomb silica-air photonic crystal may partly be fabricated. The unit cell of the structure is marked by the solid-line rhomb.

20

FIG. 4 shows the relative band gap size as a function of the normalised wave constant for the basic Honeycomb lattice (hole filling fraction=30%), and three modified versions of the Honeycomb lattice.

FIG. 5 shows a schematic illustration of the concept of nodes (high-index areas) and veins (holes/voids), and an illustration of the superior properties of the Honeycomb structure over the triangular structure as well as the influence of interstitial holes in triangular structures a), and Honeycomb structures b).

FIG. 6 shows a fibre design based on a Honeycomb structure. A single hole creates a defect in the periodicity (which thereby forms the core region of the fibre).

FIG. 7 shows an illustration of the two first band gaps (primary and secondary gaps) of a Honeycomb PCF with a cladding hole filling fraction of 10% and a defect hole

with same size as the cladding holes. Within the primary band gap the extra air hole in the core of the fibre causes a single degenerate mode to appear. This 'defect' mode is localised around the core of the fibre, and does not couple to the cladding structure (as it is here forbidden due to the PBG effect)

5

FIG. 7 further illustrates the field distribution of the core mode. For a fibre with $\Lambda=2.0\mu\text{m}$ the core mode falls within the primary band gap in a wavelength range which corresponds approximately to 1.0 to 3.0 μm . Leakage-free, single mode wave guidance is thus obtained over this wavelength range. The dotted line

10 relates to the effective index of the cladding structure.

FIG. 8 shows a PBG guided mode for a Honeycomb PCF with hole filling fraction = 10%. The figure shows the electric field squared for the 'defect' mode illustrated in FIG.7. Light areas indicate high field intensity. The real space structure has been
15 superimposed to illustrate the localisation of the 'defect' mode to the extra air hole in the core of the fibre.

FIG. 9 shows the effect of tuning the frequency of the core-mode precisely within the PBG by varying the size of the central hole. The plot is for a fixed value of $\beta\Lambda=5$. The hole filling
20 factor of the cladding is 18%. The size of the single, central defect hole is varied.

FIG. 10 shows a basic triangular lattice formed by primary elements. The unit cell of the triangular lattice is also depicted.

25 FIG. 11 shows a basic triangular lattice and a corresponding unit cell. The triangular structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a
30 centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements.

FIG. 12 shows a Honeycomb lattice formed by primary elements. The unit cell of the Honeycomb lattice is also depicted.

35

FIG. 13 shows a basic Honeycomb lattice and a corresponding unit cell. The Honeycomb structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements. The distance between two neighbouring primary elements is denoted Λ_1 . The distance between the centres of two first circles is denoted Λ_2 .

FIG. 14 shows a Kagomé lattice formed by primary elements. The unit cell of the Kagomé lattice is also depicted.

FIG. 15 shows a basic Kagomé lattice and a corresponding unit cell. The Kagomé structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements. The distance between two neighbouring primary elements is denoted Λ_1 . The distance between the centres of two first circles is denoted Λ_2 .

FIG. 16 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding additional (equal sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.

FIG. 17 illustrates a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding additional (smaller sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.

FIG. 18 illustrates a further embodiment of a cladding cross section in which a Kagomé structure is formed from a Honeycomb structure by adding additional (larger sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.

FIG. 19 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding a group of two additional (smaller) holes between the original ones defining the vertices of the fundamental hexagonal structure.

5 FIG. 20 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding a group of two additional (smaller) holes between the original ones defining the vertices of the fundamental hexagonal structure, but in contrast to FIG. 19 the group of two smaller voids is turned 90 degrees.

10 FIG. 21 illustrates a combination of the Honeycomb and Kagomé structure in which the Honeycomb defining elements have been replaced by a group of three elements in a equal sided triangular structure.

FIG. 22 illustrates an embodiment of a periodic cladding in which the voids/rods are placed
15 in a square lattice structure.

FIG. 23 illustrates a square-lattice cladding structure, which has been extended by adding additional voids/rods centred on straight lines between the square corner points.

20 FIG. 24 illustrates an embodiment of a periodic cladding in which the voids/rods are placed in a rectangular lattice structure having two unit cells.

FIG. 25 shows an embodiment of a periodic cladding in which the voids/rods are placed in an octagonal structure. A unit cell is also depicted.

25 FIG. 26 illustrates an embodiment of a periodic cladding in which triangular and hexagonal elements (sub-groups) have been combined.

FIG. 27 illustrates an embodiment of a periodic cladding in which a square lattice structure
30 and hexagonal elements (sub-groups) have been combined.

FIG. 28 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single Honeycomb cell with larger hole sizes.

35

FIG. 29 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single Honeycomb cell with smaller hole size.

- 5 FIG. 30 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single void with larger hole size.

FIG. 31 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by two voids with larger hole sizes.

10

FIG. 32 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single void with larger hole size.

- 15 FIG. 33 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by two voids with larger hole sizes.

FIG. 34 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single hexagonal cell with larger hole size.

20

FIG. 35 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single hexagonal cell with smaller hole size.

- 25 FIG. 36 shows an asymmetric position of a defect void surrounded by periodic Honeycomb cells.

FIG. 37 shows an asymmetric position of a defect void surrounded by periodic Kagomé cells

30

FIG. 38 shows an example, where the defect is formed by two voids with smaller diameters than the voids defining the vertices of the Honeycomb cladding cells.

- 35 FIG. 39 shows an example, where the defect is formed by two voids having the same diameter as the voids defining the vertices of the Honeycomb cladding cells.

FIG. 40 shows an example, where the defect is formed by two voids with larger diameters than the voids defining the vertices of the Honeycomb cladding cells.

- 5 FIG. 41 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Honeycomb cladding cell and the other void having larger dimensions.

FIG. 42 shows two voids in the core cell, one void with dimensions smaller than the voids defining the vertices of the Honeycomb cladding cell and the other void having larger
10 dimensions.

FIG. 43 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Honeycomb cladding cell and the other void having smaller dimensions.

- 15 FIG. 44 shows two voids in the core cell, both voids having dimensions as the voids defining the vertices of the Kagomé cladding cell.

FIG. 45 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Kagomé cladding cell and the other void having smaller dimensions.
20

FIG. 46 shows two voids in the core cell, one void with dimensions smaller than the voids defining the vertices of the Kagomé cladding cell and the other void having larger dimensions.

- 25 FIG. 47 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Kagomé cladding cell and the other void having larger dimensions.

FIG. 48 shows two voids in the core cell, both voids having dimensions larger than the voids defining the vertices of the Kagomé cladding cell.

- 30 FIG. 49 shows two voids in the core cell, both voids having dimensions smaller than the voids defining the vertices of the Kagomé cladding cell.

FIG. 50 shows two low-index defects which has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. In FIG. 50, the defect voids have the same dimensions as the voids used to form the Honeycomb cladding structure.

- 5 FIG. 51 shows defect voids/holes having smaller cross-section areas than the voids defining the vertices of the Honeycomb cladding structure.

FIG. 52 shows defect voids/holes having larger cross-section areas than the voids defining the vertices of the Honeycomb cladding structure.

10

FIG. 53 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Honeycomb cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- 15 FIG. 54 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Honeycomb cladding structure, the other void having a smaller cross-section area than the voids defining the vertices of the cladding structure.

- FIG. 55 shows two defect voids/holes, one void having a smaller cross-section area than
20 the voids defining the vertices of the Honeycomb cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- FIG. 56 shows two low-index defects which has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. The defect voids have the same
25 dimensions as the voids used to form the Kagomé cladding structure.

FIG. 57 shows defect voids/holes having smaller cross-section areas than the voids defining the vertices of the Kagomé cladding structure.

- 30 FIG. 58 shows defect voids/holes having larger cross-section areas than the voids defining the vertices of the Kagomé cladding structure.

- FIG. 59 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a cross-
35 section area as the voids defining the vertices of the cladding structure.

FIG. 60 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a smaller cross-section area than the voids defining the vertices of the cladding structure.

5

FIG. 61 shows two defect voids/holes, one void having a smaller cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- 10 FIG. 62 shows a cell without a defect placed between two cells containing defect voids. The defect defining the vertices of voids have smaller cross-sectional areas than the voids defining the vertices of the simple Honeycomb cladding structure.

FIG. 63 shows a cell without a defect placed between two cells containing defect voids.

- 15 The defect forming voids have cross-sectional areas as the voids defining the vertices of the simple Honeycomb cladding structure.

FIG. 64 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the

- 20 vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area smaller than the cladding structure.

FIG. 65 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area smaller than the voids defining

- 25 the vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

FIG. 66 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the

- 30 vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

FIG. 67 shows a cell without a defect placed between two cells containing defect voids.

The defect forming voids have larger cross-sectional areas than the voids defining the

- 35 vertices of the simple Honeycomb cladding structure.

FIG. 68 shows a cell without a defect placed between two cells containing defect voids. The defect forming voids have smaller cross-sectional areas than the voids defining the vertices of the simple Kagomé cladding structure.

5

FIG. 69 shows a cell without a defect placed between two cells containing defect voids. The defect forming voids have cross-sectional areas as the voids defining the vertices of the simple Kagomé cladding structure.

10 FIG. 70 shows a cell without a defect placed between two cells containing defect voids. One of the defect forming voids has a cross-sectional area as the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area smaller than the cladding structure.

15 FIG. 71 shows a cell without a defect placed between two cells containing defect voids. One of the defect forming voids has a cross-sectional area smaller than the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

20 FIG. 72 shows a cell without a defect placed between two cells containing defect voids. One of the defect forming voids has a cross-sectional area as the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

25 FIG. 73 shows a cell without a defect placed between two cells containing defect voids. The defect forming voids have larger cross-sectional areas than the voids defining the vertices of the simple Kagomé cladding structure.

FIG. 74 shows a simple Honeycomb cladding structure with circular voids in the cladding

30 cells for a case where the core (defect) site is formed by a void with elliptical cross section. The cross-sectional area of the elliptical core is larger than the cross-sectional area of the voids defining the vertices of the cladding structure.

FIG. 75 shows a void/hole with elliptical cross section placed in a simple Honeycomb cladding structure. The cross-sectional area of the elliptical core is smaller than the cross-sectional area of the voids defining the vertices of the cladding structure.

5 FIG. 76 illustrates an example in which an elliptical core void is placed centrally in a Kagomé cladding structure formed by circular voids. The cross-sectional area of the elliptical core is smaller than the cross-sectional area of the voids defining the vertices of the cladding structure.

10 FIG. 77 shows a core region having an elliptical cross-sectional area, which is larger than the cross-sectional area of the Kagomé cladding forming voids.

FIG. 78 shows a core defect of arbitrary cross section in a Honeycomb cladding structure.

15 FIG. 79 shows a core defect of arbitrary cross-section in a Kagomé cladding structure.

FIG. 80 shows a circular core forming defect void placed centrally in a simple Honeycomb cladding structure realised by near-triangular shaped voids.

20 FIG. 81 shows a circular core forming defect void placed centrally in a simple Honeycomb cladding structure realised by "windmill" shaped voids.

FIG. 82 shows a fibre amplifier for amplifying an optical signal using a length of the optical fibre according to the invention.

25

FIG. 83 shows a fibre laser for outputting an optical signal using a length of the optical fibre according to the invention.

THEORY

30

In 1990 the first efficient method for calculating PBG's of photonic crystals was described. This method basically assumes the crystal to extend indefinitely in space. Then any solution is extended, and can be described as a sum of plane waves, due to the crystal periodicity.

35

A two dimensional photonic crystal is a dielectric structure which is periodic in two dimensions, and invariant in the third dimension.

The lattice defining the periodicity of the structure is defined by its lattice vectors

- 5 $\bar{R} = n_1 \bar{R}_1 + n_2 \bar{R}_2$, where n_1 and n_2 are integers. Then extended field solutions inside the crystal may be described as a plane wave multiplied by a Bloch function with the same discrete translational symmetry as the lattice structure. Therefore, any extended field solution (exemplified by the magnetic field) can be written as the infinite sum:

$$10 \quad \bar{H}(\bar{k}, \bar{r}) = e^{i\bar{k} \cdot \bar{r}} \sum_{\bar{G}} \sum_{j=1} h_j(\bar{k}, \bar{G}) \bar{e}_j(\bar{k} + \bar{G}) e^{i\bar{G} \cdot \bar{r}} \quad (1)$$

Here \bar{G} defines the reciprocal lattice, $\bar{G} \cdot \bar{R} = 2\pi N$, where N is an integer. The vector $(\bar{k} + \bar{G})$ and the unit vectors $\bar{e}_1(\bar{k} + \bar{G})$ and $\bar{e}_2(\bar{k} + \bar{G})$ define a triad. \bar{k} is the wave vector of the plane wave.

15

The actual field (and eigen frequencies), is found by expressing Maxwell's equations in the form of a Hermitian operator equation:

$$\nabla \times \left[\frac{1}{\epsilon(\bar{r})} \nabla \times \bar{H}(\bar{r}) \right] = \left(\frac{\omega}{c} \right)^2 \bar{H}(\bar{r}) \quad (2)$$

20

To solve this equation, it is needed to Fourier-transform the inverse dielectric function $1/\epsilon(\bar{r})$ as well:

$$\begin{aligned} \frac{1}{\epsilon(\bar{r})} &= \sum_{\bar{G}} \epsilon_{\bar{G}}^{-1} e^{i\bar{G} \cdot \bar{r}}, \\ \epsilon_{\bar{G}}^{-1} &= \frac{1}{a_c} \int d^2 \bar{r} e^{-i\bar{G} \cdot \bar{r}} \frac{1}{\epsilon(\bar{r})}. \end{aligned} \quad (3)$$

25

Here the integral is taken over a primitive unit cell having an area a_c , and the sum is in principle over all possible \bar{G} -vectors. One finds the dielectric constants, by either using an FFT, or by finding analytical expressions for the Fourier coefficients. Here the latter technique has been used.

For a given choice of the reciprocal lattice vector \vec{G} the following dependency from (1) and (2) is found:

$$5 \quad \sum_{\vec{G}'} \begin{pmatrix} \vec{e}_2 \cdot \vec{e}_2' & -\vec{e}_2 \cdot \vec{e}_1' \\ \vec{e}_1 \cdot \vec{e}_2' & \vec{e}_1 \cdot \vec{e}_1' \end{pmatrix} \cdot \begin{pmatrix} h_1' \\ h_2' \end{pmatrix} \varepsilon_{\vec{G}}^{-1} \vec{G} \cdot L = \left(\frac{\omega}{c}\right)^2 \begin{pmatrix} h_1 \\ h_2 \end{pmatrix} \quad (4)$$

where $L = \left| \vec{k} + \vec{G} \right| \left| \vec{k} + \vec{G}' \right|$. Inside the matrices, the operand is the vector $(\vec{k} + \vec{G}')$ if a prime ' is given, and the vector $(\vec{k} + \vec{G})$ if no prime is given. N such equations are rewritten (one for each of the N shortest \vec{G} -vectors), truncating the sum to the same N \vec{G}' -vectors, $\vec{G}_i = \vec{G}_i'$,
10 to a simple Hermitian eigen value matrix equation using a basis of N plane waves.

The first Brillouin zone is the set of points in the reciprocal lattice plane, which are closer to the lattice grid point $\vec{G} = \vec{0}$, than to any other reciprocal lattice grid points. The first Brillouin zone can be constructed from the irreducible Brillouin zone through the use of mirroring
15 and rotational symmetry. For finding the possible PBG's of a photonic crystal, one solves the eigen value-problem for all the different values \vec{k}_n (\vec{k}_n is \vec{k} projected on the plane defined by the reciprocal lattice vectors) along the boundary of the irreducible Brillouin zone. Any frequency intervals, where no solutions are found define the PBG's of the photonic crystal.

20

For propagation restricted to the plane defined by the lattice vectors \vec{R} (that is $\vec{k} = \vec{k}_r$) the two different plane wave directions in (4) de-couple into TM solutions ($j=1$ corresponding to the $\vec{e}_2 \cdot \vec{e}_2'$) and TE solutions ($j=2$ corresponding to the term $\vec{e}_1 \cdot \vec{e}_1'$). The TM solutions are defined as solutions having the electric field along the invariant direction, while TE
25 solutions have the electric field in the plane defined by the lattice vectors. For $\vec{k} = \vec{k}_n$ the equations no longer de-couple, and the complete set of equations in (4) must be solved.

In order to calculate the electromagnetic properties of a spatial defect within an otherwise periodic structure - such as the properties of the core region of the PCF's -
30 the outlined plane wave method may still be applied, where the smallest region describing the periodic structure is enlarged to include the defect (a so-called super-cell approximation). In this way a super-periodicity is introduced where also

the defect is repeated periodically. Using a super-cell approximation the properties of the defect region may be accurately determined if the size of the super-cell is large enough to ensure that neighbouring defects are uncoupled. The numerical results presented in this patent have been calculated using the principles outlined
5 in this section.

The most basic requirement for waveguides to operate by PBG effects is that a periodic cladding structure exists and that this cladding structure is able to exhibit PBG effect. Within the invention is an example of a cladding structure with a two-
10 dimensional periodicity - namely the Honeycomb structure illustrated in Fig.1.

Focusing first on the cladding structure alone, Fig. 2 illustrates the complete, out-of-plane two-dimensional PBG's which are exhibited for a basic Honeycomb structure with an air filling fraction of 30%, where the propagation constant, β , (which is
15 defined as that component of the wave vector which is parallel to the centre axis of the holes) is fixed at δ/Λ (where Λ is the centre distance between holes). The refractive index of the background material is set to be equal to 1.45. From Fig.1 it is seen the appearance of two PBG's:

- 20 a) a primary gap between bands 2 and 3, and
- b) a secondary gap between bands 6 and 7.

The formation of these PBG's is the most fundamental requirement for PBG based components. In order to increase the two band gaps, the impact on the size of the
25 band gaps from modification implied to the Honeycomb-based structure is illustrated. The important case of introducing several differently doped silica glasses in the structure is studied. For silica glasses a representative index range which may be achieved with today's doping technologies goes from to 3% and down to 1% of the nominal undoped value of silica which is approximately 1.45 at 1.55 μm . A
30 schematic of the modified structure is shown in Fig. 3, where the rhomboidal solid line represents one choice of unit cell (a unit cell is defined as the smallest possible area which only through translation may be used to fully represent the periodic structure). The structure has a background material which comprises further small hole elements - which relates to those interstitial holes which have been observed

in experimentally realised triangular photonic crystal cladding structures - and up to three different dopant levels of silica. The interstitial holes are easily introduced in a photonic crystal realised by the stack- and pull fabrication techniques currently used for PCF's.

5

In Fig. 4 the relative size of the primary gap is illustrated for the basic Honeycomb structure with an air filling fraction of 30%. The relative band gap size is defined as the difference between the upper and lower frequencies of the band gap divided by its centre frequency. Although no PBG's exists for the in-plane case of silica-air structures ($\beta=0$), complete PBG's are found to open up when moving out of the plane. In the figure is also included three cases of modified Honeycomb structures:

- a) interstitial holes introduced ($f_{\text{air}}=8\%$)
- b) interstitial holes and three differently doped silica glasses ($n_1=1.44$, $n_2=1.45$,
15 $n_3=1.47$)
- c) three differently-doped silica glasses ($n_1=1.47$, $n_2=1.45$, $n_3=1.44$).

The indices refer to the three silica types indicated in Fig. 3, and for the structures comprising three silica dopants the outer diameter of the tube and cane (silica
20 type 1
and 3, respectively) have been set equal to Λ . For the basic structure (undoped silica and air) a maximum PBG size of 5.3% at $\beta=6.5/\Lambda$ is observed. This size may be increased to 6.4% by adding interstitial holes to the structure, and further increased to 7.1% by lowering the refractive index of the silica surrounding the air
25 holes (silica type 1) while increasing the index of the silica forming the canes (silica type 3).

The Honeycomb photonic crystal is a structure with high-index regions - denoted nodes (i.e. the region with silica type 3 in Fig. 3) which are isolated by voids/holes.
30 The region bridging two nodes is denoted a vein in Fig. 5.

It has been found that the largest band gaps are achieved for structures having most isolated nodes (high-index regions), and having nodes with the highest possible refractive index. Veins (bridges) may be narrowed further in the

Honeycomb-based structures through the interstitial holes, whereas the interstitial holes fall right in the centre of the node in the triangular structure. Thus, it is evident that interstitial holes may be either advantageous or disadvantageous, depending on their location.

5

To further support that the nodes should have the highest possible index, it is observed how the size of the primary band gap is, indeed, decreased for the structure (c) modified by lowering the index of the nodes, while increasing the index of the silica surrounding the air holes.

10

Although not illustrated the same conclusions is found to be valid for the size of the secondary band gap. This result demonstrates the advantages of introducing differently doped silica glasses in the Honeycomb-based photonic crystal, and isolating the high-index regions by surrounding them with materials with lower

15 refractive index.

According to the invention, cladding structures having holes/rods placed in a so-called Kagomé structure are also advantageous. Both Kagomé and Honeycomb structures have intrinsically larger nodes and relatively narrower veins than the triangular structure. Furthermore, for the triangular structure, it should be noted how the interstitial holes which have been observed in photonic crystal fibres with a triangular hole arrangement in the cladding, fall right in the centre of the nodes (thereby severely damaging their ability to act as high index centres, and the cladding structure to exhibit PBG effect). Thus, it is an advantage of the Kagomé and Honeycomb structure that the interstitial holes leave the nodes undisturbed, and at the same time narrow the veins even further.

By locally breaking the periodicity of a photonic crystal, a spatial region with optical properties different from the surrounding bulk photonic crystal can be created. If such a defect region supports modes with frequencies falling inside the forbidden gap of the

surrounding full-periodic crystal, these modes will be strongly confined to the defect. This is the principle on which the operation of the PBG guiding fibres relies, namely a complete out-of-plane 2D band gap exhibited by the photonic crystal cladding, and a correctly designed defect, forming a spatial region to which very

strong transverse confinement can be achieved. For this defect region to exhibit optical properties different from the surrounding periodic structure (i.e., be able to support a localised mode) it is important to notice that it is not a requirement that the defect region has a higher index than its surroundings.

5

For a non-periodic dielectric surrounding media this would be the only case under which localisation can occur (which is of course the case of total internal reflection utilised in all conventional optical waveguides). Leakage-free guidance of light confined to a region with a lower index than its surroundings would, therefore, not
10 be expected to be possible from index guidance waveguide theory, but if the surrounding material exhibits PBG effects even a low-index defect region may be able to localise the light, and thereby act as a (new) highly unusual waveguide.

For a fibre design (see Fig. 6) based on a Honeycomb structure and a single hole
15 creating a defect in the periodicity (which thereby forms the core region of the fibre) the primary and secondary band gaps of the cladding are depicted in Fig. 7. The fibre has a cladding air filling fraction of 10% and the defect 'core' hole has the same size as the cladding holes. Inside the primary gap, a single defect-mode traversing the gap from approximately $\beta/\Lambda=5$ to 17 is observed. This mode is caused
20 solely by the introduction of the defect air hole in the Honeycomb structure.

For the full periodic structure, exactly the same PBG's (with no modes inside) with identical boundaries to those of the crystal including the defect is found. This defect-mode is strongly localised to the region comprising the extra air hole (albeit
25 this is a low-index region). Fig. 8 illustrates the calculated squared amplitude of the E-field. The mode was calculated for a β/Λ -value of 8.0. For this value, the defect-mode is approximately in the middle of the band gap, and the expected strong localisation of the mode is apparent. This mode does not couple to cladding modes in the PCF, (since the mode is falling inside the band gap of the photonic
30 crystal cladding) and loss-less guidance may therefore, in principle, be achieved over long lengths.

Although almost the entire field of the defect mode for this particular PCF is distributed in the silica, full confinement of light in air is - in principle - possible for

PBG guiding fibres. Such fibres would, naturally, have a tremendous potential in both telecommunications and sensor areas. Also included in the Fig.7 is the radiation line (dotted line), defined as the lowest-frequency allowed mode in the full periodic structure - and relates to the effective index, n_{eff} of the cladding

- 5 structure as $1/n_{\text{eff}}$. Below this line is a semi-infinite 'band gap', where no modes exist. This is the region in which all TIR-based fibres (including triangular high-index core PCF's) operate, since a high-index defect causes at least one mode to appear below this line. Such index-guided modes are seen not to be a feature of the low-index core Honeycomb-based PCF's.

10

- Improved cladding structures, as e.g. modified Honeycomb or Kagomé structures, means that larger band gaps may be achieved. Larger band gaps results in stronger confinement of the defect mode, and will, therefore, not only be of importance for wider 'tuning'-ranges of the fibres, but also for very robust operation
- 15 of these with respect to low propagation and bending losses.

- A further advantageous is the high flexibility of the PBG guiding fibres. By the PBG effect it is, as demonstrated, possible to open up forbidden frequencies regions by designing the micro-structured cladding correctly, and by introducing a defect site
- 20 (having one or more holes/rods) to localise light within this region. By independently optimising the cladding and the defect structures, it is thus possible to tailor the properties of the fibres.

- In Fig.9 is illustrated how it is possible - for a fibre with a design as in Fig.6 - that by
- 25 varying the size of the central defect hole, but keeping the cladding structure fixed, to precisely tune the frequency of the defect mode within the PBG region of the cladding. Although this is only been illustrated for a defect site introduced by a single additional hole, many other ways of creating such defects may be thought of. E.g. for polarisation managing purposes the introduction of asymmetric defects
- 30 (possibly with a very large defect region) seem as a correct design route.

DETAILED DESCRIPTION OF THE INVENTION

- Many different realisations of periodic cladding structures exist for low-index-core PBG
- 35 waveguides, because they can consist of a void, hole, or any suitable (additional or

missing) material(s) disposed periodically in a (first material) matrix. By low-index-core PBG waveguide is meant any structure capable of the guiding electromagnetic fields according to the present invention, such as optical fibres, optical fibre amplifiers, fibre lasers and optical fibre based sensors. Another group of PBG waveguides comprises

5 planar waveguide structures, such as sensors, splitters, couplers, multiplexers, amplifiers and lasers.

An example of such a periodic micro-structured cladding shown in FIG. 16, where additional voids (20) have been centred on a straight line between the original voids (21) forming the 2-dimensional hexagonal (Honeycomb) structure. The function of the additional voids is to modify the penetration of the electromagnetic field between the different unit cells (low-refractive index cladding areas can locally limit the cladding field intensity) and hereby add additional means of adjusting the waveguiding properties of the fibre/waveguide. It is also noteworthy that the structure illustrated in FIG. 16 may be seen

10 as a superposition of the Honeycomb structure (formed by the voids (21)) and the Kagomé structure (formed by the voids (20)).

Further possibilities of adjusting the photonic-band gap-forming properties of the periodic hexagonal cladding structures are exemplified by the illustrations in FIG. 17 and FIG. 18, in which the mutual cross-section areas of the cladding forming void are modified. In the example of FIG. 17, the additional holes/voids (22) are formed by a smaller cross-section area than the ones (21) that are not placed on a straight line between neighbouring voids.

20

In FIG. 18, the additional holes (23) on the contrary have a larger cross section area, whereby the field penetration properties between unit cells are controlled in a new way. It should also be noted, that the examples of hexagonal cladding structures presented here not necessarily have to be formed by circular voids, but any periodically repeated cross-sectional shape may be used to for the PBG's of the cladding (e.g., holes/voids of triangular, square, elliptical or any other shape may be applied).

25

In addition, it should be pointed out that minor variations from the ideal structures described here may be introduced during fabrication, but as long as the fundamental physical limits of the fibres are preserved, the structures are covered by the present invention.

30

Another possibility of engineering the PBG properties of the cladding structures, and thereby create new waveguiding properties of the optical waveguides/fibres, is to replace single voids by groups of voids. An example of such a design is illustrated in FIG. 19, which may be seen as a further development of the structure of FIG. 16, in which the additional
 5 hole/void (20) placed on a straight line between two neighbouring holes has been replaced by a group (24) of two voids with smaller cross-section area.

A different orientation of the group of additional voids (25) is illustrated in the example of FIG. 20, resulting in a configuration, where four voids are placed on a straight line.
 10 Naturally more complex groups of voids may be placed in the overall structure, and direct extensions of the outlined approach are the use of groups with more than two additional voids, and the shaping of these with cross-sections different from the circular one.

A different example of the combined Kagomé and Honeycomb structures is shown in FIG. 21 in which the voids (20) placed in the Kagomé structure is maintained compared to FIG. 16, wherein each the of voids in the superimposed Honeycomb structure is replaced by a
 15 group of three smaller voids (26) forming an equal sided triangular shaped figure. The specific orientation of the three-element group shown in FIG. 21 is not the only possibility, and numerous other orientations, relative magnitudes of the cross-sectional areas of the
 20 voids/rods and the numbers of elements in each sub-group is covered by this invention.

The cladding structures, which have been drawn forward in the previous paragraph, have all been based on a fundamental hexagonal shape. However, also other possibilities exist for forming the periodic cladding structured low-index-core fibres, and one such example is
 25 the square structure as illustrated in FIG. 22. In this realisation, the voids/rods (27) are centred at the corners of a square lattice structure.

In FIG. 23, the square structure has been extended by adding additional voids/rods (28) centred on straight lines between the square corner points. Note also that this structure
 30 may be seen as a superposition of two square lattice structures, which has been angled 45 degrees relative to each other.

Yet another cladding structure realisation is the rectangular lattice shown in FIG. 24, which may be applied for applications, where two principal main axes (e.g., for polarisation
 35 controlling components) are necessary. In agreement with the previous considerations on

hexagonal structures, in which different combinations of sub-groups of voids/rods are replacing the original elements in the lattice structure new and improved structures may be obtained by this technique.

- 5 An interesting example is shown in FIG. 25, where an octagonal structure is depicted. The structure may also be viewed as sub-groups of four equal sized voids/rods in a square structure placed in an overall square structure angled by 45 degrees relative to the sub-groups. As it has been mentioned previously, the orientations of the sub-groups may be varied in an infinite number of combinations, forming the basis of designing new
- 10 waveguiding structured with unique electromagnetic/optic properties that may be tailored to numerous advanced applications.

Examples of periodic cladding structures that combines hexagonal and triangular shaped lattice structures are shown in FIG. 26, and in FIG. 27 a combination of square and

- 15 hexagonal subgroups is illustrated. Other possibilities of applying different parallelograms in the cladding structures are also realistic for optical mode shaping.

All cladding structures previously disclosed, may be combined with various realisations of the core area. The core may be formed by a low refractive index area, which deliberately

- 20 breaks the symmetry of the cladding, and allows light to be guided along the core by the PBG effect. Thus, the waveguiding effect is fundamentally different from conventional high refractive index waveguiding.

- 25 One example of the PCF with low-index core area covered by the present invention has already been illustrated in FIG. 6, in which a low-index defect has been introduced as an additional void/hole centrally placed in one of the Honeycomb structure cells.

- Another example of a defect (or core) area that may serve as a low-index core area is illustrated in FIG. 28. In this structure, the larger diameter of the voids forming the core
- 30 area (31) ensures that the optical mode field is confined around the core and only to a limited extent penetrates into the cladding cells (32). The advantage of this realisation of the core area is that the mode field in this case will be concentrated in the centre of the core defect area, where glass or even materials with high non-linear coefficients may be placed for applications where strong non-linearities are relevant.

Yet another realisation of the formation of the core defect without adding a central void in one of the Honeycomb cells, is illustrated in FIG. 29, where the core forming voids (33) are of smaller diameter than the cladding cell voids (32). It should also be noted that other defects (or core areas) could be formed by interchanging the voids in the core region with voids of other dimensions, in such a way that the core cell is formed by voids of different diameters.

Such realisations are exemplified in FIG. 30, where an asymmetric core cell (34) is shown. Such an approach may exhibit specifically interesting properties with respect to the implementation of polarisation maintaining fibres. In FIG. 30, the core is formed by placing one void with a larger cross-sectional area in an otherwise periodic Honeycomb structure.

A further step is to add more than one void of different dimensions in what is going to be the defect (or core) area, and such an example is shown in FIG. 31, where two larger holes is placed in opposite corners of a Honeycomb cell (35).

Another example of a defect created by a single void (36) of different (here larger) cross-sectional area than the cladding forming voids, is shown in FIG. 32, where a single low-index void has been introduced in a Kagomé cladding structure.

Similar to the Honeycomb lattice structures, one or more voids having a larger cross-sectional area may be introduced into the Kagomé structures. Such an example is shown in FIG. 33 using two enlarged voids (37).

The Kagomé cladding structure naturally also opens the possibility of forming defects by replacing a group of voids in a hexagonal core cell. In FIG. 34 all six voids (38) forming the core cell have been enlarged, whereas the same six voids (39) have been reduced in size as exemplified in FIG. 35.

Depending on the desired performance, it is naturally possible to further increase the number of voids with larger dimensions than the cladding structure forming voids. Fundamentally, the core defect area may be made up by holes of variable size only ensuring that a located core (or defect) mode may be located around the core cells. It will also be possible to create a defect by introducing a single (or a few) void(s) with a cross section that deviates significantly from the other voids forming the cladding structure, even

though the different voids have the same cross-sectional areas. Note also that this way of creating defects by locally modifying the lattice-forming voids can be applied on all the different described cladding structures. Note also, that although the presented examples have been made for voids/rods with circular cross sections, the present invention is not
 5 limited to these. Triangular, squared and higher order polygons or distorted polygons are also included as well as other shapes such as elliptic and asymmetric polygons.

As previously described, core regions may be formed by the introduction of a low-index void placed in one of the cells of the cladding, whereby this specific defect cell becomes
 10 able to guide light prohibited by the periodicity of the periodic cladding. However, the additional void does not necessarily have to be placed centrally in the core cell, but it may also be placed in an asymmetrical position as illustrated in FIG. 36, where a defect void (41) is placed away from the centre of the core cell, which in this example is surrounded by periodic Honeycomb cells (42).

15 In FIG. 37 a similar example using an asymmetrically placed additional hole (43) is presented for a Kagomé cladding cell structure (44). Such placement of the void in the core cell may be used for special mode field shaping for example in cases, where specific in- and out-coupling properties have to be fulfilled.

20 Another example of a more complex design of the core region, is shown in FIG. 38, where the defect is formed by two voids (45) with smaller diameters than the voids forming the Honeycomb cladding cells (42).

25 The voids in the core region (46) of the fibre may also, as illustrated in FIG. 39, be of the same dimensions as the cladding cell forming voids, or they may be of larger dimensions as the voids (47) illustrated in FIG. 40. Again, it must be noted that the defect forming voids in the core region does not have to be of equal size, and in the example of two voids in the core cell, one void (48) may be of dimensions as the voids forming the cladding cell (42)
 30 and the other (49) may be of larger dimensions as shown in FIG. 41.

Yet further examples as the one illustrated in FIG. 42 may use one void (50) of smaller dimensions than the voids forming the cladding cell (42) and the other (49) may be of larger dimensions. There may also be situations as illustrated in FIG. 43, where one void
 35 (50) may be of smaller dimensions as the voids forming the cladding cell (42) and the other

(50) may be of equal dimensions. It should be noted that the examples presented in FIG. 38-43, all have the same orientation of the line connection the two voids in the core cell, but this should in no way be seen as a preference to the possibility of placing the voids in the core cell. Indeed the two (or more) voids may not only have variable size, but they may
 5 also be placed in many different ways within the core cell, depending on the mode field shape requirements given by the specific application. Furthermore, even more voids than two may be placed in the core cell, and three, four or more voids may for specific applications be relevant for fibre fabrication. It should also be noted that the circular shaped cross-sections of the voids in the presented examples may be extended to include other
 10 shapes. Other possibilities include the introduction of groups of additional voids in different cladding structures than the Honeycomb cladding structure.

Examples of two-void defects in a Kagomé cladding structure is presented in FIG. 44-49, where different defect forming void cross-section areas are applied. Note also that the
 15 chosen orientation of the defect forming two-void structure is not the only possibility, and an infinite number of alternative locations (including random location within the core cell) may be used. Another important point is that the low-index spatial region, which forms the core, may extend much further than a single defect void/rod. Also connected voids/holes forming a single asymmetric super-void is covered by this invention.

20 The possibility of fabricating multi-core structures, is an interesting option for many future applications of optical fibres/waveguides, for instances in connection with spatial signal processing or as elements in complex coupler configurations. Such ideas have been suggested normal index-guiding waveguides, but the realisation of multi-core regions is
 25 technologically very difficult for standard fibres/waveguides. It is, therefore, a very attractive property of the PCF's that their fabrication (e.g., by stacking together tubes and rods) may allow relatively simple realisation of multi-core waveguides.

The present invention also includes such waveguides combining low-index core regions or
 30 low- and high-index regions, and among the examples of realistic embodiments are structures as shown in FIG. 50. In this example, the basic Honeycomb cell structure (60) has been used to form the photonic crystal cladding, and two low-index defects (61) has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. In FIG. 50, the defect voids have the same dimensions as the voids used to
 35 form the cladding structure.

Another example is presented in FIG. 51, in which the defect voids/holes (62) have smaller cross-section areas than the voids forming the cladding structure. By adjusting the relative sizes of the core (defect) voids compared to those of the cladding structure, means of mode shaping (and thereby waveguide property engineering) is obtained.

FIG. 52 illustrates an example in which the defect voids (63) have larger dimensions than the voids forming the Honeycomb cladding structure. It should be noted that the cross-sections of the defect voids/holes could be of any other shape than the circular one, and in the two core structure as discussed in this context, neither should the two defects have equal cross-sectional areas. A simple example of such a structure is shown in FIG. 53, where the two defect voids (64) and (65) have different cross-sectional areas. The void (64) has in this case a larger cross sectional area than the void (65), which has the same cross sectional-area as the voids forming the cladding structure.

Another possibility is shown in FIG. 54, where an embodiment with one void (64) of larger cross-sectional area and one void (66) of smaller cross-sectional area than the cladding forming voids is shown. Also here the simple Honeycomb structure with circular voids/holes has been shown as the example.

In FIG. 55 an alternative example is given in which one void (66) of smaller cross-sectional area and one void (65) of equal cross-sectional area as the cladding forming voids is shown. In the specific examples shown in FIG. 50-55, the defect voids have been placed centrally in the Honeycomb cells, but this is in no way a requirement within the present invention, since arbitrary locations of defect voids/holes within the unit cells may be applied with the purpose of engineering specific waveguiding properties. The idea of applying multiple defects in the periodic cladding cell structure is not limited to the simple Honeycomb unit cell, but may also be applied for other cladding structures.

One example is illustrated in FIG. 56, where an example is shown of a Kagomé cladding structure (68) with two defect voids (67) of equal dimensions as the voids used to form the cladding structure.

In FIG. 57, another embodiment shows a Kagomé cladding structure, which has been modified by two defect voids/holes (69) of smaller cross-section areas than the voids

forming the cladding structure. In analogy with the simple Honeycomb cladding examples previously discussed, the defects may also be of larger cross-sectional areas than the cladding structure forming voids as shown in FIG. 58, and different examples of two defect holes of different cross-sectional areas are illustrated for the Kagomé cladding structure in FIG. 59-61.

In all the examples shown in FIG. 50-61, the two defect voids/holes were placed in neighbouring cells, but this is not always preferable. For instance in cases, where weaker coupling or even no power coupling is needed, it may be advantageous to apply larger spacing between the multiple defects (or core) areas.

To exemplify this, the simple Honeycomb cladding structure has been shown together with two defects, which in FIG. 62 has been located in such a way that one cell (70) without defect is placed in between the two cells (71) containing defect voids. In the embodiment of FIG. 62, the defect forming voids have smaller cross-sectional areas than the voids forming the simple Honeycomb cladding structure.

Another example is presented in FIG. 63, where cells (72) with defect forming voids of equal cross-sectional area as the cladding forming voids is shown. Also defect cells formed by voids/holes of different cross-sectional areas may be used.

In FIG. 64, an example is shown in which two defects have been located in such a way that one cell (70) without defect is placed in between one cell (71) containing a smaller defect void and another cell (72) containing an equal sized defect void as those voids forming the cladding structure.

FIG. 65 shows an example where a cell (73) with a defect void of larger cross-section area is placed with a separation of one cell from another cell (71) with a smaller defect void. Two different combination examples with separated core areas in simple Honeycomb cladding structures are shown in FIG. 66-67. It should also be stressed that more than one cladding cell could be used to separate defect containing cells, and also more than two defects may be included in a single fibre.

Multiple defects in the periodic cladding cell structure may also be applied for other cladding structures. One example is illustrated in FIG. 68, where an example is shown of a

Kagomé cladding structure (74) with two defect voids (75) of smaller dimensions than the voids used to form the cladding structure, placed in with a separation of one cell (74) between the defect cells.

- 5 In FIG. 69, another embodiment shows a Kagomé cladding structure, which has been modified by two defect voids/holes (76) of equal cross-section areas as the voids forming the cladding structure. Also here one cladding cell has been used to separate the two defect cells.
- 10 In analogy with the simple Honeycomb cladding examples previously discussed, the defects may also be of larger cross-sectional areas than the cladding structure forming voids or of non-equal size as shown in different examples in FIG. 70-73, for the Kagome cladding structure. As it previously has been discussed, the defects may be formed by a combination of several voids/holes, and this approach may also be combined with the
- 15 multiple-core approach discussed in this part of the description. This leads to a wide range of design possibilities, where one defect may be constructed in one way (e.g., by a single void), while others may be constructed differently. This may not only be done with respect to cross-section but also with respect to the number of substructures that are to be used in the formation of the defects (for example may another defect be formed by three closely
- 20 spaced triangular voids/holes)

It has previously been mentioned that the use of voids with non-circular cross-sections may be applied for mode shaping purposes and because the physical properties given by the fabrication process may shape the individual voids in specific cross sections. All these

25 possibilities may be combined with all the previously mentioned combinations of different cladding structures, multi-element voids, single- or multiple defects etc. A few examples of voids with cross-sections different from the circular ones are shown in FIG. 74-81.

In FIG. 74, a simple Honeycomb cladding structure with circular voids (80) in the cladding

30 cells is shown for a case where the core (defect) site is formed by a void (81) with elliptical cross section. Such a design may provide a more pronounced birefringence. In FIG. 74, the cross-sectional area of the defect void (81) is larger than the cross-sectional area of the cladding forming voids (80). Another example is illustrated in FIG. 75, where a smaller void/hole (82) with elliptical cross section is placed in a simple Honeycomb cladding

structure. Note that the elliptical voids have been placed centrally in the Honeycomb cells, but other placements and orientations of the elliptical major axes may also be made.

FIG. 76 illustrates an example in which an elliptical core void (84) is placed centrally in a
 5 Kagomé cladding structure formed by circular voids (83). In this specific embodiment, the cross-sectional area of the defect forming void is smaller than the voids in the cladding.

Another realisation is shown in FIG. 77, only in this case the orientation of the major axes of the elliptical defect is tilted 30 degrees compared to FIG. 76, and in the case of the
 10 example of FIG. 77 the cross-sectional area is larger than the cross-sectional area of the cladding forming voids.

In FIG. 78, a core defect of arbitrary cross section (85) is shown in a simple Honeycomb cladding structure, and in FIG. 79 a core defect (86) of arbitrary cross-section is shown for
 15 a Kagomé cladding structure.

Other combinations may also be considered in which the voids/holes forming the cladding structure have cross-sections different from the circular shape used in most examples. Such an example is shown in FIG. 80 in which a circular core forming defect void (87) is
 20 placed centrally in a simple Honeycomb cladding structure realised by near-triangular shaped voids (88). It should be noted that the orientation of the cladding forming near-triangular voids (or voids with any different cross-sectional shape) may be individually adjusted by rotation as long as the desired PBG effect of the cladding is realised. The shown orientation is an optimised configuration.

25 FIG. 81 shows windmill shaped voids/holes forming the cladding in a Honeycomb structure. As in FIG. 80 it should be noted that the orientation of the cladding forming voids/holes may be individually adjusted by rotation as long as the desired PBG effect of the cladding is realised. The shown orientation is an optimised configuration.

30 Although the non-circular voids/holes in FIG. 80 and FIG. 81 have been illustrated for basic Honeycomb structures, non-circular voids/holes may as well be applied for defining Kagomé structures so as to adjust the PBG.

It should be noted that the combination of different cross-section shaped voids as shown in FIG. 74-81 may be adapted to multi-core configurations as shown in FIG. 62-73.

In FIG. 82 shows an example of a fibre amplifier comprising a length of the fibre according to the invention (87), an input signal which is to be amplified (88), an output signal which has been amplified (89) and a source of radiation (90) for providing a pump signal (91). The pump signal typically pumps a dopant which has been introduced into the length of fibre.

In FIG. 83 shows an example of a fibre laser for providing laser radiation comprising a length of the fibre according to the invention (92), an output signal (93), and a source of radiation (94) for providing a pump signal (95). The fibre laser further comprises means for reflecting (96) the signal travelling inside the laser cavity.

The PBG effect, which is the fundamental element of the low-index guiding property is obtained by the periodicity of the cladding structure. However, only a very limited number of periods is necessary in order to confine the electromagnetic field, and it will, consequently, be possible to use conventional overcladding of the part of the preform that contains the periodicity.

20

The in case of optical fibres, this overcladding could further more improve the strength of the fibre so as to provide a fibre that is easier to splice and cleave. In a first aspect of the overcladded fibre, a circular outer fibre cross-section could be imagined, so that standard fibre fixtures may be used. However, also other overcladding tubes could be imagined, e.g., square or hexagonally shaped outer fibre cross-sections, which may be preferred in the case of highly polarisation preserving fibres, where the outer shape of the fibre could facilitate the localisation of fibre primary axes etc.

As an alternative to the conventional overcladding approach, the strong mode confinement of the PBG fibres, could suggest another approach in which the fibre surrounding the core area is constructed by bundling capillary tubes into a close-packed arrangement according to the preferred design of the periodic cladding region. Outside of this periodic region, which have to be fixed in position, the outer fibre structure (corresponding to an outer cladding region) could be formed by packing of thinner glass rods, which could be mechanically shaken into place, because the key issue here not is to form a periodic

structure. When the preform then later is drawn into a fibre, the outer cladding structure is melted together to form a (near) solid outer cladding. The only requirement for the outside placement of thin glass rods is that the surface tension due to an uneven distribution outside the periodic part of the fibre, do not result in a significant deformation of the

5 periodicity.

PCF's with new functionalities may be fabricated by introducing regions within the fibres with special doping materials, or even materials that deviates significantly from the fibre basis material (e.g., glass, or polymers). These additional materials could for instance be

10 rare-earth dopants, specially ultra-violet (UV) sensitive materials, or even semiconductors or metals.

The fabrication process may comprise the introduction of thin rods of doped (or different) material at well-defined locations in the closely packed, periodic basis material structure.

15 Alternatively, some of the capillary tubes could be made from a doped material, or the preform (or parts of it) could even be placed in solutions of materials that could diffuse or bind to the basis material rods and tubes. Since specific parts of the preform could be treated individually before further stacking or alternative processing would continue, this approach allows for a very high degree of flexibility.

CLAIMS

1. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

5

- a core region extending along the longitudinal direction,
 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising
- 10 primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,

15 defined by at least one unit cell, wherein, for each unit cell:

- a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, and
- 20 - one or more further elongated elements are provided each of which
- has an area not exceeding $1/6$ of the area of that primary element having its centre within the unit cell and having the largest area,
 - has a refractive index being lower than that of any material adjacent thereto,
 - has a centre not positioned outside the unit cell, and
- 25 - does not cover the centre of the first circle.

2. An optical fibre according to claim 1, wherein the one or more further elements each has an area not exceeding $1/8$, the area of that primary element having its centre within the unit cell and having the largest area.

30

3. An optical fibre according to claim 1, wherein, for the unit cell, a second circle is defined being the largest possible circle having its centre not positioned outside the unit cell, and where the second circle not comprising any parts of the first or further elongated elements, and where the area of the second circle is smaller than that of the first circle.

35

4. An optical fibre according to claim 3, wherein the area of the second circle is 90% or less than that of the first circle.

5. An optical fibre according to claim 3, the centre of first circle at least substantially
5 coincides with the centre of the second circle.

6. An optical fibre according to claim 1, wherein the centres of those primary elements, parts of which are within a distance of 1.5 or less times the radius of the first circle from the centre of the first circle, define the vertices of a polygon with three or more sides.

10

7. An optical fibre according to claim 6, wherein the polygon is a regular polygon.

8. An optical fibre according to claim 6, wherein the polygon is chosen from the group consisting of a triangular, rectangular, quadratic, or hexagonal polygon.

15

9. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

20

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than
25 a refractive index of any material adjacent to the elongated elements,

the periodic structure being defined, in a cross-section perpendicular to the longitudinal direction, by a unit cell, where the sum of all areas of elongated elements, which areas are comprised within the unit cell, is larger than 1.2 times the area of that primary element
30 having its centre axis not positioned outside the unit cell and having the largest area.

10. An optical fibre according to claim 9, wherein the sum of all areas of elongated elements comprised within the unit cell is larger than 1.3 times the area of that primary element having its centre axis not positioned outside the unit cell and having the largest
35 area.

11. An optical fibre according to claim 9, wherein the periodic structure comprises secondary elongated elements having a refractive index being larger than that of any material adjacent thereto and to any material being adjacent to a primary element.

5

12. An optical fibre according to claim 11, wherein, for a unit cell, the sum of all areas of secondary elements within the unit cell is larger than 0.25 times the area of a secondary element having its centre axis not positioned outside the unit cell and having the largest area.

10

13. An optical fibre according to claim 11, wherein, for a unit cell, the sum of all areas of secondary elements within the unit cell is larger than 0.05 times the area of the primary element having its centre axis not positioned outside the unit cell and having the largest area.

15

14. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

20

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

25

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and where a polygon is defined:

- having centres of primary elements in its vertices,

30

- not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and

- having an area less than or equal to that of the unit cell,

where a first circle is defined as the smallest circle possible having its centre positioned

35

within the polygon, and which comprises the vertices of the polygon,

and where the area of the circle divided by the area of the polygon is less than 2.4.

15. An optical fibre according to claim 14, wherein the polygon is a regular polygon and the
5 first circle is that circumscribing the polygon.

16. An optical fibre according to claim 14, wherein the polygon has four or more sides.

17. An optical fibre according to claim 16, wherein the polygon is quadratic or a hexagonal
10 polygon.

18. An optical fibre with a waveguide structure having a longitudinal direction, said optical
fibre having:

15 - a core region extending along the longitudinal direction,

- a cladding region extending along the longitudinal direction, said cladding region
comprising an at least substantially two-dimensionally periodic structure comprising
primary, elongated elements each having a centre axis extending in the longitudinal
20 direction of the waveguide, the primary elements having a refractive index being lower than
a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,
defined by a unit cell, where, in each unit cell:

25

$$n_d \Lambda_2 > n_{ud} \Lambda_1 (\sqrt{3})$$

where

- n_d is the largest index of refraction within a first circle which is defined as a largest
circle possible having a centre not positioned outside the unit cell and not enclosing any
30 part of any primary element,

- n_{ud} is a largest index of refraction not positioned outside the unit cell but outside any
of the first circles of the unit cells,

- Λ_1 is a smallest distance between centre axes of two primary elements within the
periodic structure,

- Λ_2 is a distance between the centre of the first circle of the unit cell and the centre of the first circle of an adjacent unit cell.

19. An optical fibre according to claim 18, wherein, for each unit cell: $n_d \Lambda_2 > 2 n_{ud} \Lambda_1$.

5

20. An optical fibre according to claim 18, wherein, in each unit cell, n_d is at least substantially identical to n_{ud} .

21. An optical fibre according to claim 18, wherein, in each unit cell, $n_d > n_{ud}$.

10

22. An optical fibre according to claim 18, wherein n_{ud} is and n_d is selected within the interval of 1-10.

23. An optical fibre according to claim 18, wherein the unit cell comprises further elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the cross-sectional area of each of the further elements being less than 1/6 of a cross-sectional area of that primary element, having its centre within the unit cell, having the largest cross-sectional area.

24. An optical fibre according to claim 23, wherein:

$$n_d \Lambda_2 > (\sqrt{3}) n_{ud} \Lambda_3$$

where

25 - n_d is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,

- n_{ud} is a largest index of refraction not positioned outside the unit cell but outside any of the first circles of the unit cells,

30 - Λ_3 is a smallest distance between centre axes of two primary or further elements within the periodic structure,

- Λ_2 is a smallest distance between the centres of two adjacent first circles.

25. An optical fibre according to claim 24, wherein, for each unit cell: $n_d \Lambda_2 > 2 n_{ud} \Lambda_3$

35

26. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements,

where more than 3 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

27. An optical fibre according to claim 26, wherein more than 4 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

28. An optical fibre according to claim 26, wherein the parts of the first primary elements exist within a distance of 1.1 or less times the radius of the first circle from the centre of the first circle.

29. An optical fibre according to claim 26, wherein the first primary elements define a polygon having 3-6 sides and having centres of first primary elements in its vertices, each of the first primary elements not having centres in the vertices being positioned with its centre axis no further from a side of the polygon than $1/5$ of a length of that side.

30. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising
 - 5 primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, each primary element having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,
 10 defined by a unit cell, and where, for each unit cell, one or more polygons are defined as:

- a first polygon is defined as having its vertices at centres of first primary elements selected by:
 - defining a first circle as the largest circular area possible having a centre not
 - 15 positioned outside the unit cell and not enclosing any part of any primary elements,
 - selecting the first primary elements as those having not positioned further away from the centre of the first circle than 1.2 times the radius of the first circle,
- for each area, if any, of the unit cell, which area is not comprised within a first polygon, an additional polygon is defined as having its vertices at centres of
 - 20 additional primary elements selected by:
 - defining an additional circle as the largest circular area possible having a centre not positioned outside the area and not enclosing any part of any primary elements,
 - selecting the additional primary elements as those having their centres not
 - 25 positioned further away from the centre of the additional circle than 1.2 times the radius of the additional circle,

the periodic structure comprising deviating primary elements having a shape deviating from a circular shape and having extending parts defined as those parts of the shape of the
 30 deviating primary element extending outside a circle having the same area as that of the deviating primary element and having its centre at a centre of the deviating primary element, each extending part extending toward one of those primary elements which together with which the deviating primary element defines a side of a polygon in the periodic structure,

each extending part extending toward a primary element and having an area being larger than 3% of the area of the circle.

31. An optical fibre according to claim 30, wherein at least one extending part has an axis
5 of symmetry at least substantially coinciding with a line intersecting the centre of the circle and the centre of a primary element with which the deviating primary element defines a side.

32 An optical fibre according to claim 30, wherein at least one extending part extends a
10 distance of at least 5% of the radius of the circle and in a direction away from the centre of the circle.

33. An optical fibre according to claim 30, wherein a first circle is defined as the smallest possible circle having its centre positioned within the first polygon, and which comprises
15 (meaning: within or on the boundary) the vertices of the first polygon.

34. An optical fibre according to claim 30, wherein the first polygon has four or more sides.

35. An optical fibre according to claim 34, wherein the first polygon is a hexagonal.
20

36 An optical fibre according to claim 30, wherein the first polygon is regular.

37. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:
25

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising
30 primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,
35 defined by a unit cell, and where a polygon is defined:

- 5

38. An optical fibre according to claim 37, wherein one or more further elongated elements are provided each of which

- where:

- 20 39. An optical fibre according to claim 38, wherein the one or more further elongated elements each has an area not exceeding $1/8$ of the area of that primary element having its centre within the unit cell and having the largest area.

41. An optical fibre according to claim 37, wherein the structure is defined by the regular hexagonal polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and where hexagonal polygons exist, each side of which is shared with a triangle.

42. An optical fibre according to claim 1, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of

any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

43. An optical fibre according to claim 42, wherein, in each unit cell, a secondary element is
5 provided having its centre axis within the first circle.

44. An optical fibre according to claim 14, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements
10 each has a centre axis extending in the longitudinal direction of the fibre.

45. An optical fibre according to claim 44, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

15 46. An optical fibre according to claim 18, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

20 47. An optical fibre according to claim 46, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

48. An optical fibre according to claim 26, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of
25 any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

49. An optical fibre according to claim 48, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

30

50. An optical fibre according to claim 33, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

35

51. An optical fibre according to claim 50, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

52. An optical fibre according to claim 37, wherein the periodic structure further comprises
 5 one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

53. An optical fibre according to claim 52, wherein, in each unit cell, a secondary element is
 10 provided having its centre axis within the first circle.

54. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

15 - a core region extending along the longitudinal direction,

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal
 20 direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure further comprising secondary, elongated elements each having a refractive index being larger than that of any material adjacent thereto and any material
 25 adjacent to a primary element, each secondary element having a centre axis extending in the longitudinal direction of the fibre.

55. An optical fibre according to claim 54, wherein the periodic structure is, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where,
 30 for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, where a secondary element is provided having its centre axis within the first circle.

56. An optical fibre according to claim 55, wherein a plurality of first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle, a polygon being defined as having its vertices at the centres of the plurality of first primary elements, the polygon being a regular, hexagonal polygon.

5

57. An optical fibre according to claim 56, wherein, in the periodic structure, hexagonal polygons exist, all sides of which are common to another hexagonal polygon.

58. An optical fibre according to claim 56, wherein the structure is defined by the hexagonal
10 polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and where hexagonal polygons exist, each side of which is common to a triangle.

59. An optical fibre according to claim 1, wherein the core region comprises a first
15 additional elongated element extending in the longitudinal direction of the fibre.

60. An optical fibre according to claim 59, wherein the first additional element is a void.

61. An optical fibre according to claim 59, wherein the additional element or any material
20 adjacent thereto comprises a dopant or a material showing higher order optical effects.

62. An optical fibre according to claim 59, wherein the core region comprises a second
additional elongated element, the first and second additional elements being positioned at
25 a distance where light travelling in one additional element is able to couple to the other additional element.

63. An optical fibre according to claim 14, wherein the core region comprises a first
additional elongated element extending in the longitudinal direction of the fibre.

30 64. An optical fibre according to claim 63, wherein the first additional element is a void.

65. An optical fibre according to claim 63, wherein the additional element or any material
adjacent thereto comprises a dopant or a material showing higher order optical effects.

66. An optical fibre according to claim 63, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

5

67. An optical fibre according to claim 18, wherein the core region comprises a first additional elongated element extending in the longitudinal direction of the fibre.

68. An optical fibre according to claim 67, wherein the first additional element is a void.

10

69. An optical fibre according to claim 67, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

70. An optical fibre according to claim 67, wherein the core region comprises a second

15 additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

71. An optical fibre according to claim 26, wherein the core region comprises a first

20 additional elongated element extending in the longitudinal direction of the fibre.

72. An optical fibre according to claim 71, wherein the first additional element is a void.

73. An optical fibre according to claim 71, wherein the additional element or any material

25 adjacent thereto comprises a dopant or a material showing higher order optical effects.

74. An optical fibre according to claim 71, wherein the core region comprises a second

additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other

30 additional element.

75. An optical fibre according to claim 33, wherein the core region comprises a first

additional elongated element extending in the longitudinal direction of the fibre.

35 76. An optical fibre according to claim 75, wherein the first additional element is a void.

77. An optical fibre according to claim 75, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

5 78. An optical fibre according to claim 75, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

10 79. An optical fibre according to claim 37, wherein the core region comprises a first additional elongated element extending in the longitudinal direction of the fibre.

80. An optical fibre according to claim 79, wherein the first additional element is a void.

15 81. An optical fibre according to claim 79, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

82. An optical fibre according to claim 79, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at
20 a distance where light travelling in one additional element is able to couple to the other additional element.

83. An optical fibre according to claim 44, wherein the core region comprises a first additional elongated element extending in the longitudinal direction of the fibre.

25

84. An optical fibre according to claim 83, wherein the first additional element is a void.

85. An optical fibre according to claim 83, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

30

86. An optical fibre according to claim 83, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

35

87. An optical fibre according to claim 1 the fibre comprising a plurality of core regions.
88. An optical fibre according to claim 87, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than
5 a period of the periodical structure.
89. An optical fibre according to claim 14, the fibre comprising a plurality of core regions.
90. An optical fibre according to claim 89, wherein the core regions are positioned
10 symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.
91. An optical fibre according to claim 18, the fibre comprising a plurality of core regions.
- 15 92. An optical fibre according to claim 91, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.
93. An optical fibre according to claim 26, the fibre comprising a plurality of core regions.
20
94. An optical fibre according to claim 93, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.
- 25 95. An optical fibre according to claim 33, the fibre comprising a plurality of core regions.
96. An optical fibre according to claim 95, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.
30
97. An optical fibre according to claim 37, the fibre comprising a plurality of core regions.
98. An optical fibre according to claim 97, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than
35 a period of the periodical structure.

99. An optical fibre according to claim 44, the fibre comprising a plurality of core regions.

100. An optical fibre according to claim 99, wherein the core regions are positioned
5 symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.

101. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

10

- a length of the optical fibre according to claim 1, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,

- means for providing the liquid or gas into the void of the core region,

15 - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,

- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

20

102. A sensor according to claim 101, wherein the introducing means are adapted to introduce the light into the first additional element.

103. A sensor according to claim 101, wherein the core region comprises a second,
25 elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

30 104. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 14, wherein the core region comprises at least a first additional element, the first element being a void extending along

35 the longitudinal direction of the fibre,

- means for providing the liquid or gas into the void of the core region,
 - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- 5 - means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

105. A sensor according to claim 104, wherein the introducing means are adapted to introduce the light into the first additional element.

10

106. A sensor according to claim 104, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the

15 introducing means are adapted to introduce the light into the second additional element.

107. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- 20 - a length of the optical fibre according to claim 18, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
 - means for introducing light into the core region, the light being adapted to interact
- 25 with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

30 108. A sensor according to claim 107, wherein the introducing means are adapted to introduce the light into the first additional element.

109. A sensor according to claim 107, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and

35 second additional elements are positioned at a distance where light travelling in one

additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

110. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the
5 sensor comprising:

- a length of the optical fibre according to claim 26, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- 10 - means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- means for detecting light emitted from the fibre and for determining the
15 characteristic of the liquid or gas.

111. A sensor according to claim 110, wherein the introducing means are adapted to introduce the light into the first additional element.

20 112. A sensor according to claim 110, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

25 113. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 33, wherein the core region
30 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be
35 determined,

- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

114. A sensor according to claim 113, wherein the introducing means are adapted to
5 introduce the light into the first additional element.

115. A sensor according to claim 113, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one
10 additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

116. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:
15

- a length of the optical fibre according to claim 37, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- 20 - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

25
117. A sensor according to claim 116, wherein the introducing means are adapted to introduce the light into the first additional element.

118. A sensor according to claim 116, wherein the core region comprises a second,
30 elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

119. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 44, wherein the core region
5 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be
10 determined,
- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

120. A sensor according to claim 119, wherein the introducing means are adapted to
15 introduce the light into the first additional element.

121. A sensor according to claim 119, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one
20 additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

122. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- 25 - a length of optical fibre according to 1, wherein the core region comprises a dopant material along at least part of the length, and
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

30

123. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 14, wherein the core region comprises a dopant material along at least part of the length, and

35

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

124. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

5

- a length of optical fibre according to claim 18, wherein the core region comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

125. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 26, wherein the core region comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

20 126. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 33, wherein the core region comprises a dopant material along at least part of the length, and

25 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

127. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

30 - a length of optical fibre according to claim 37, wherein the core region comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

128. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 44, wherein the core region comprises
5 a dopant material along at least part of the length, and
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

10 129. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 1, wherein the core region comprises
a dopant material along at least part of the length,
- 15 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and
- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the
20 length of the optical fibre so as to further amplify the optical signal.

130. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 14, wherein the core region comprises
25 a dopant material along at least part of the length,
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and
- 30 - feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

131. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 18, wherein the core region comprises a dopant material along at least part of the length,

5

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

- feedback means for selectively feeding back at least part of the amplified

10 optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

132. A fibre laser for outputting laser radiation, said fibre laser comprising:

15 - a length of optical fibre according to claim 26, wherein the core region comprises a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

20

- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

25 133. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 33, wherein the core region comprises a dopant material along at least part of the length,

30 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

5 134. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 37, wherein the core region comprises a dopant material along at least part of the length,

10 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

135. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 44, wherein the core region comprises
20 a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

25 - feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

ABSTRACT

An optical fibre having a periodical cladding structure providing an photonic band gap structure with superior qualities. The periodical structure being one wherein high index
5 areas are defined and wherein these are separated using a number of methods. One such method is the introduction of additional low index elements, another method is providing elongated elements deformed in relation to a circular cross section. Also described is a cladding structure comprising elongated elements of a material having an index of refraction higher than that of the material adjacent thereto. Using this additional material,
10 prior art structures may obtain much better qualities.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
221

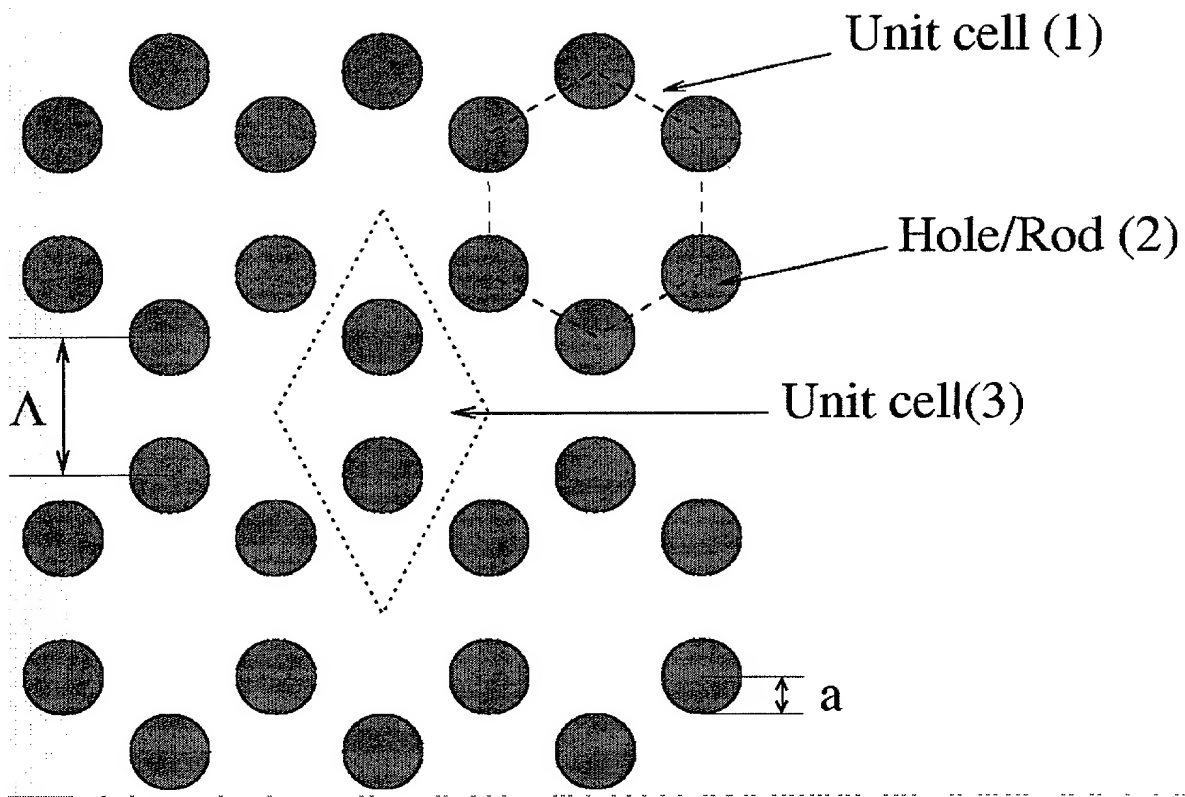


Fig 1



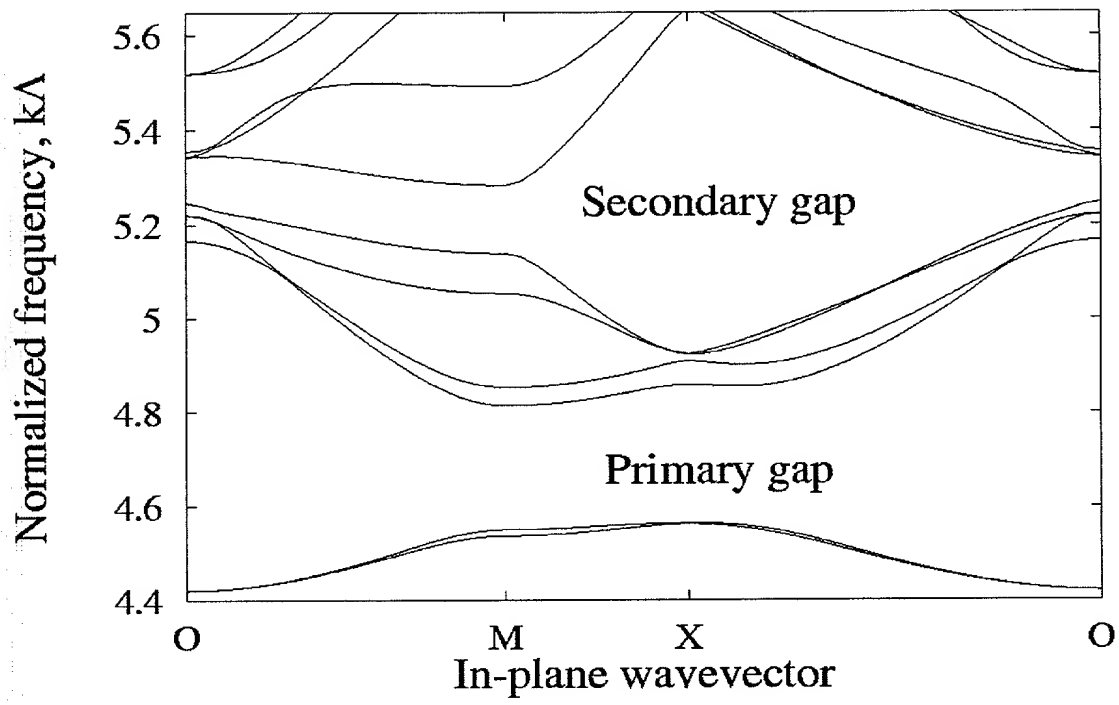


Fig 2

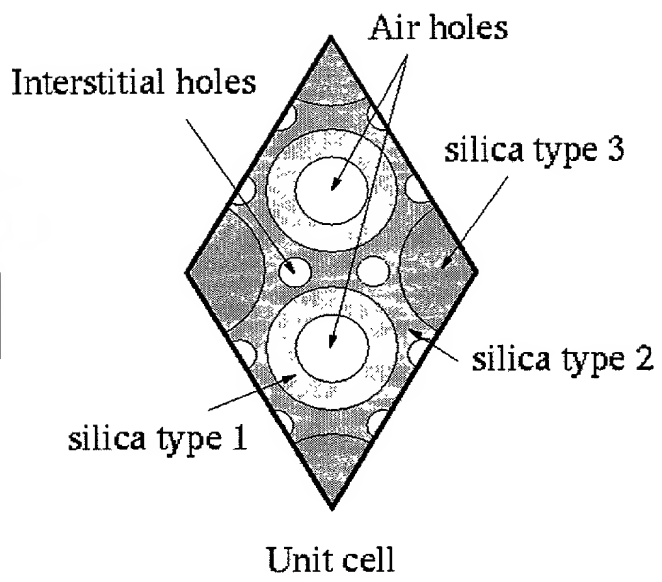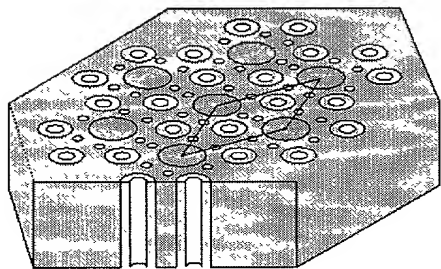

Fis³




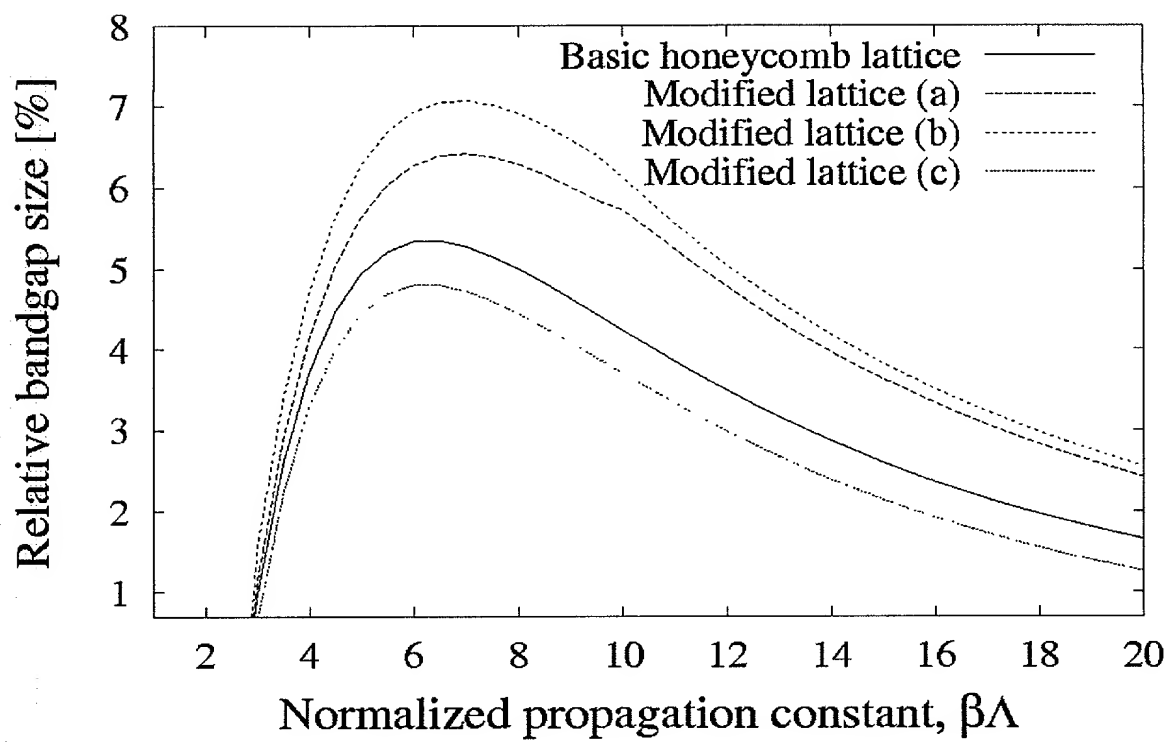


Fig 4

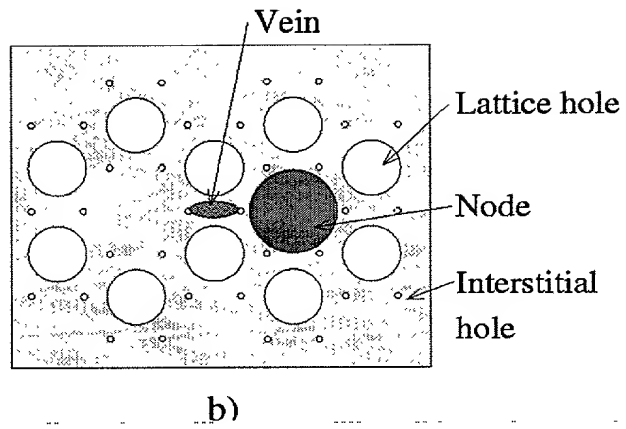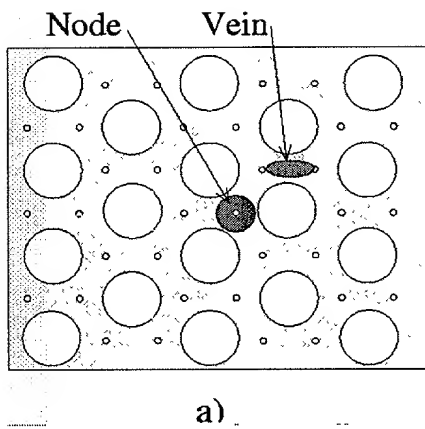

Fis5

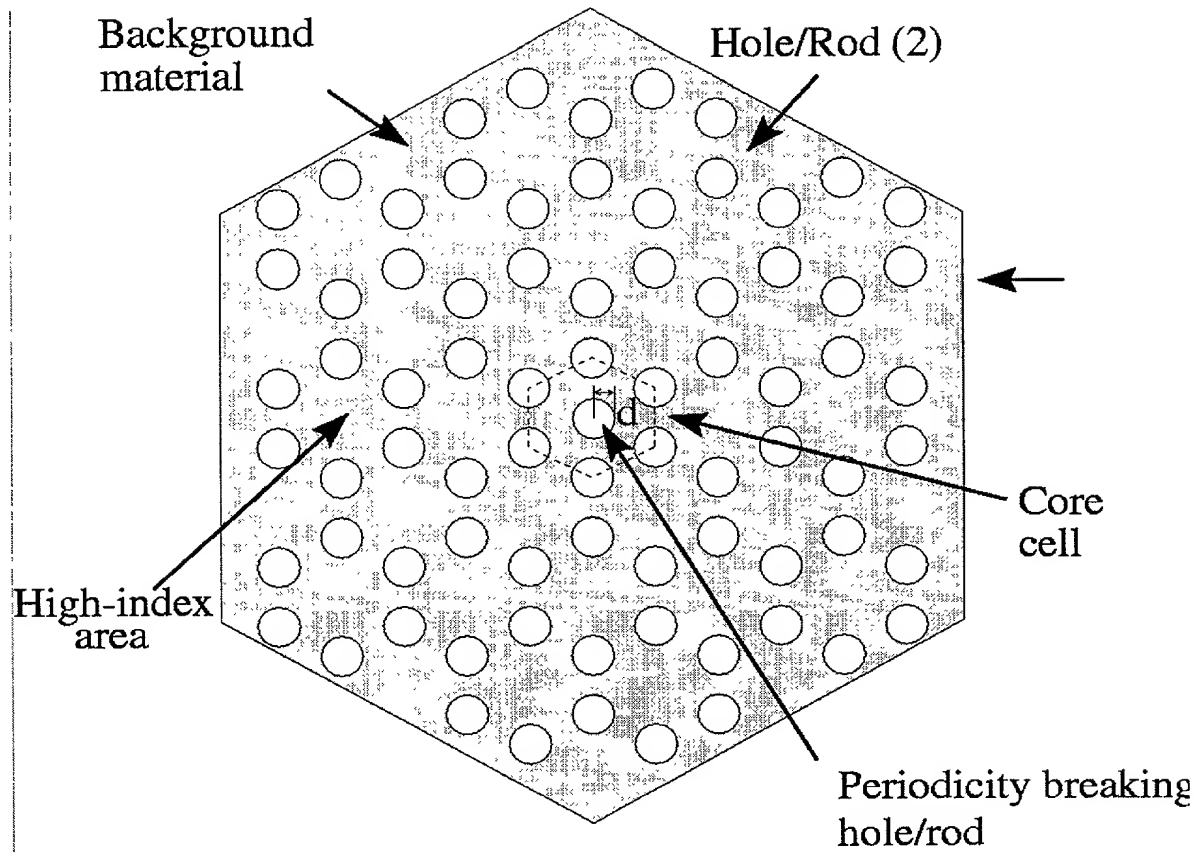

F.56

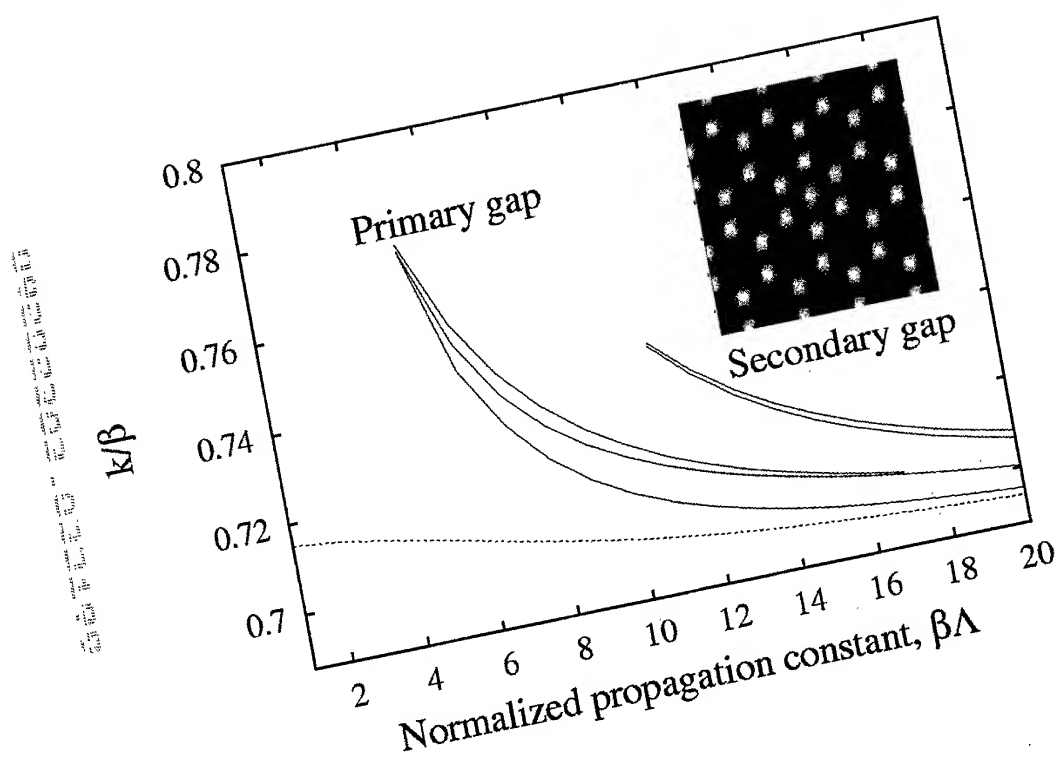


Fig 7

U.S. GOVERNMENT PRINTING OFFICE: 1964

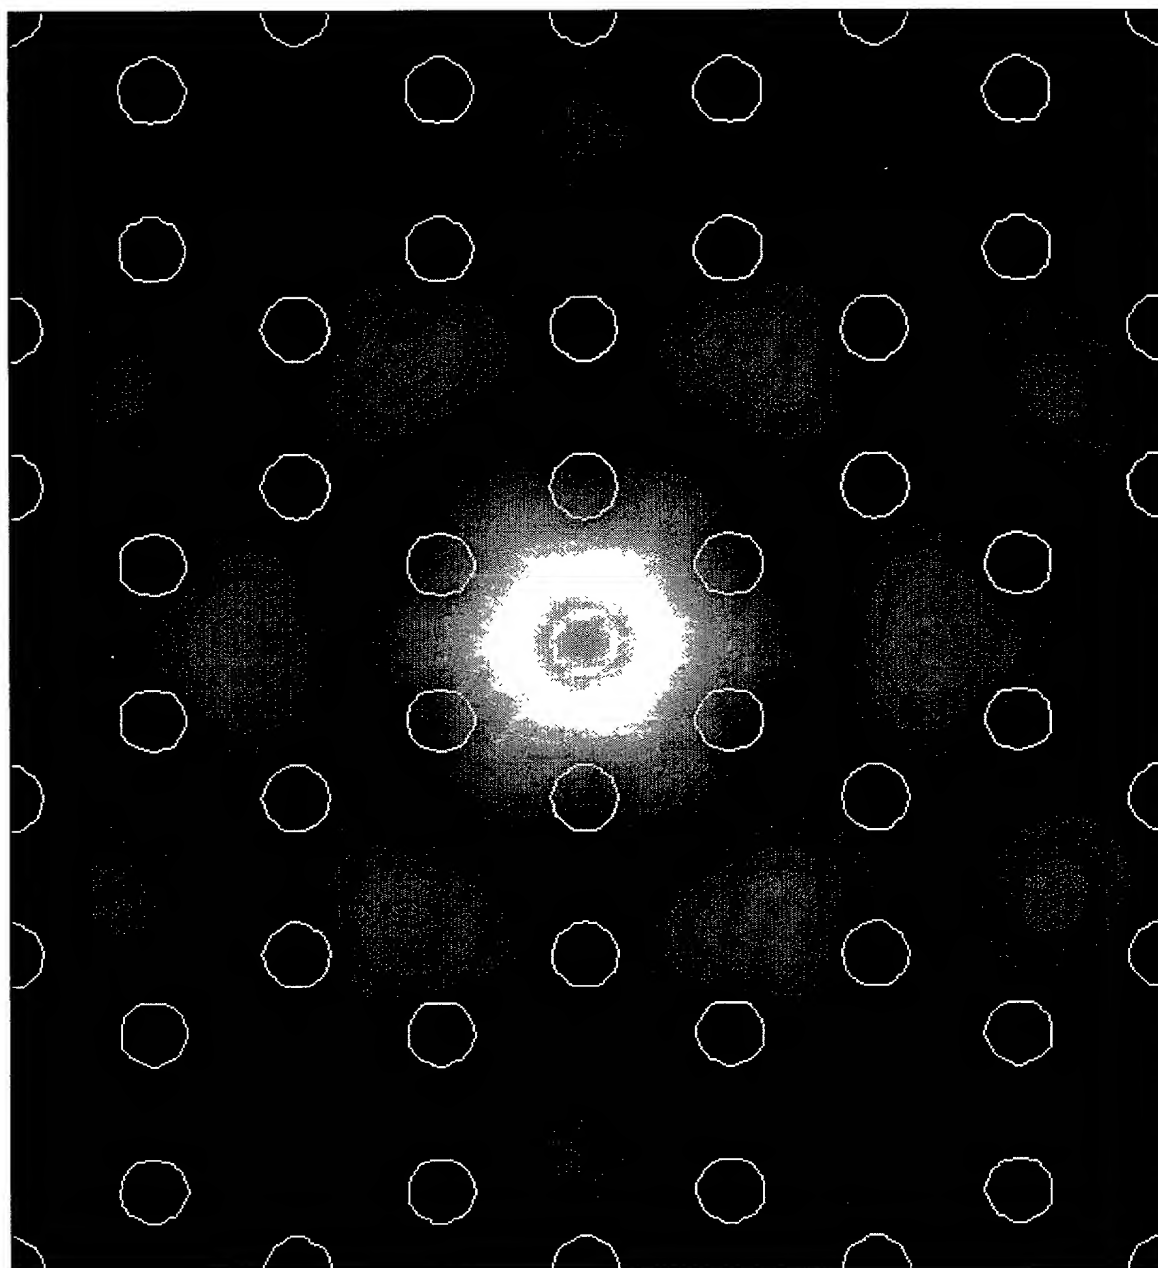


Fig 8

Mode index β/κ

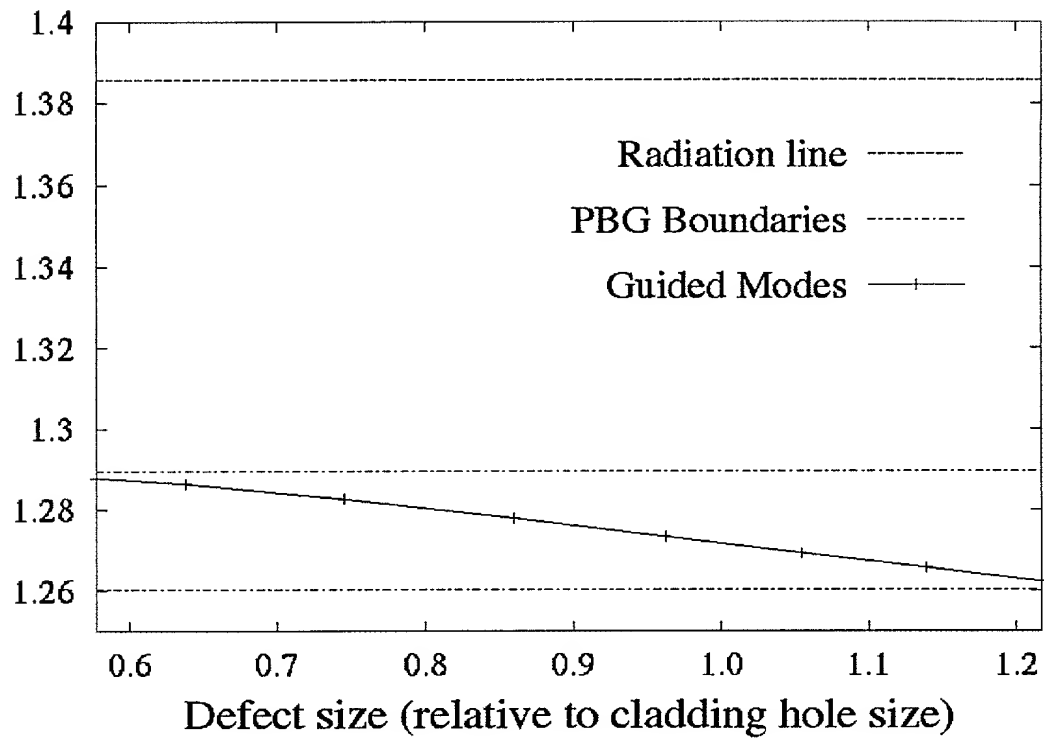


Fig 9

Triangular lattice

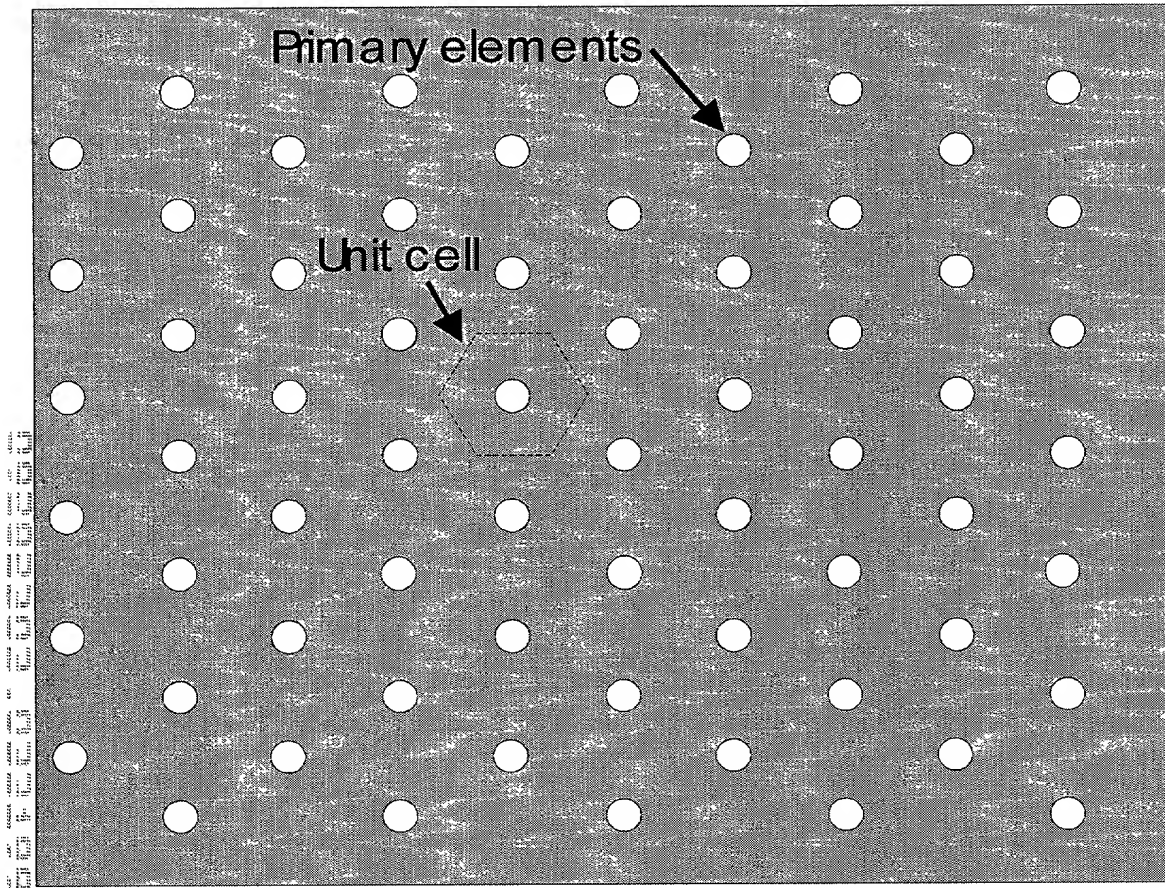


Fig 10

Triangular lattice

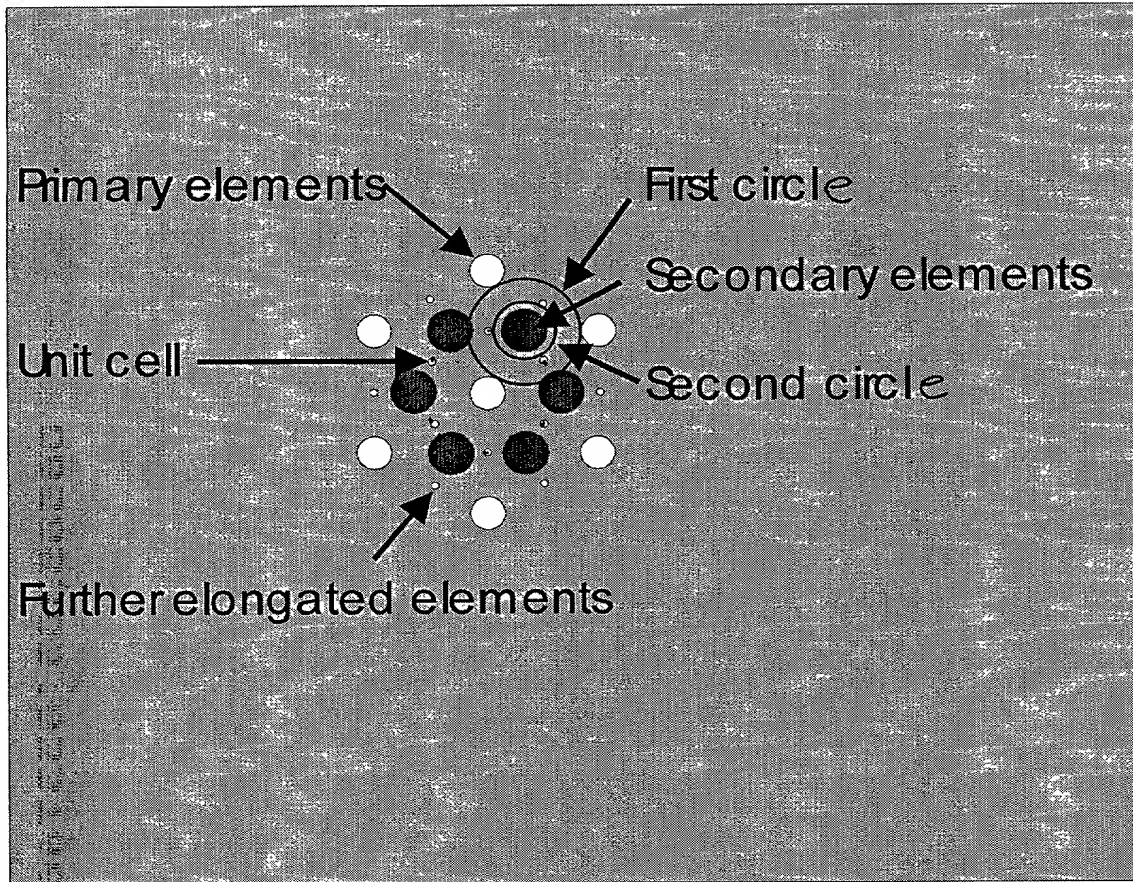


Fig 11

Honeycomb lattice

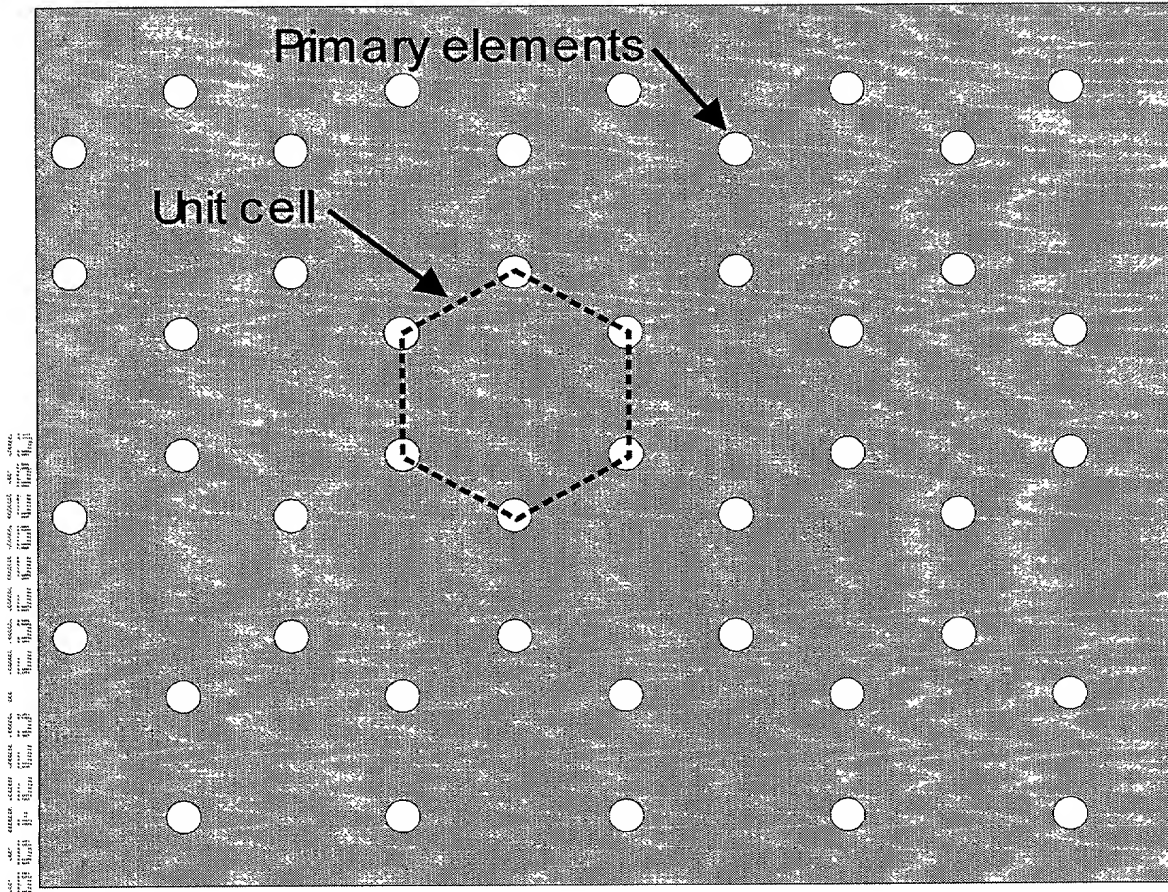


Fig 12

Honeycomb lattice


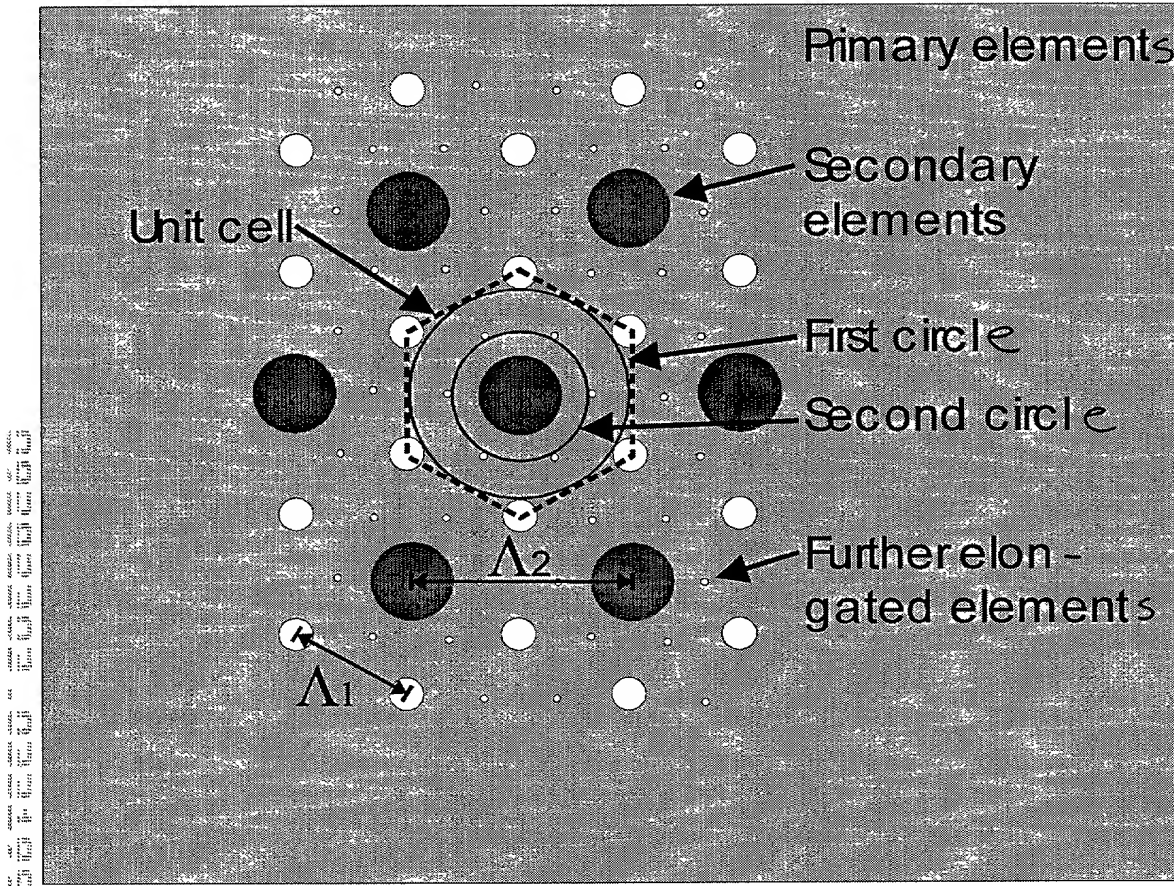


Fig 13

Kagomé lattice

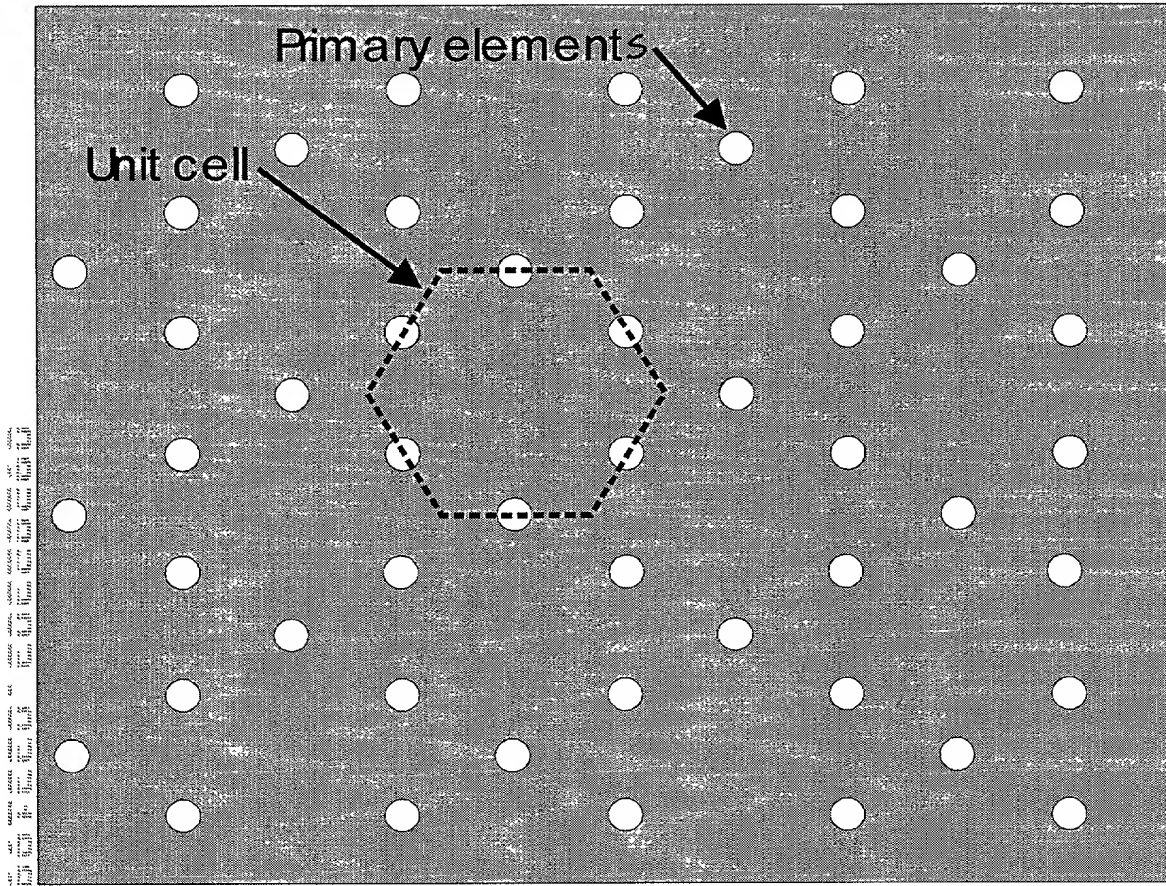

Fis 14

Kagomé lattice

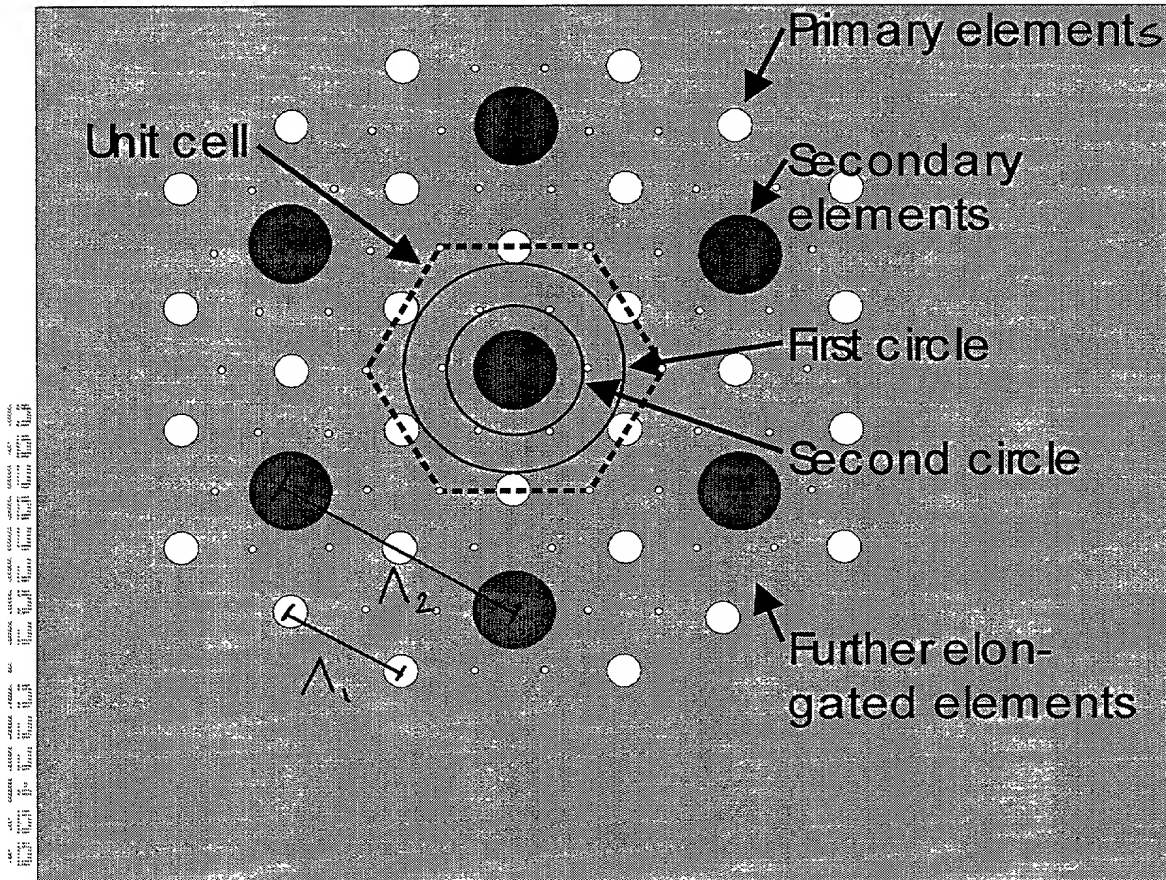


Fig 15

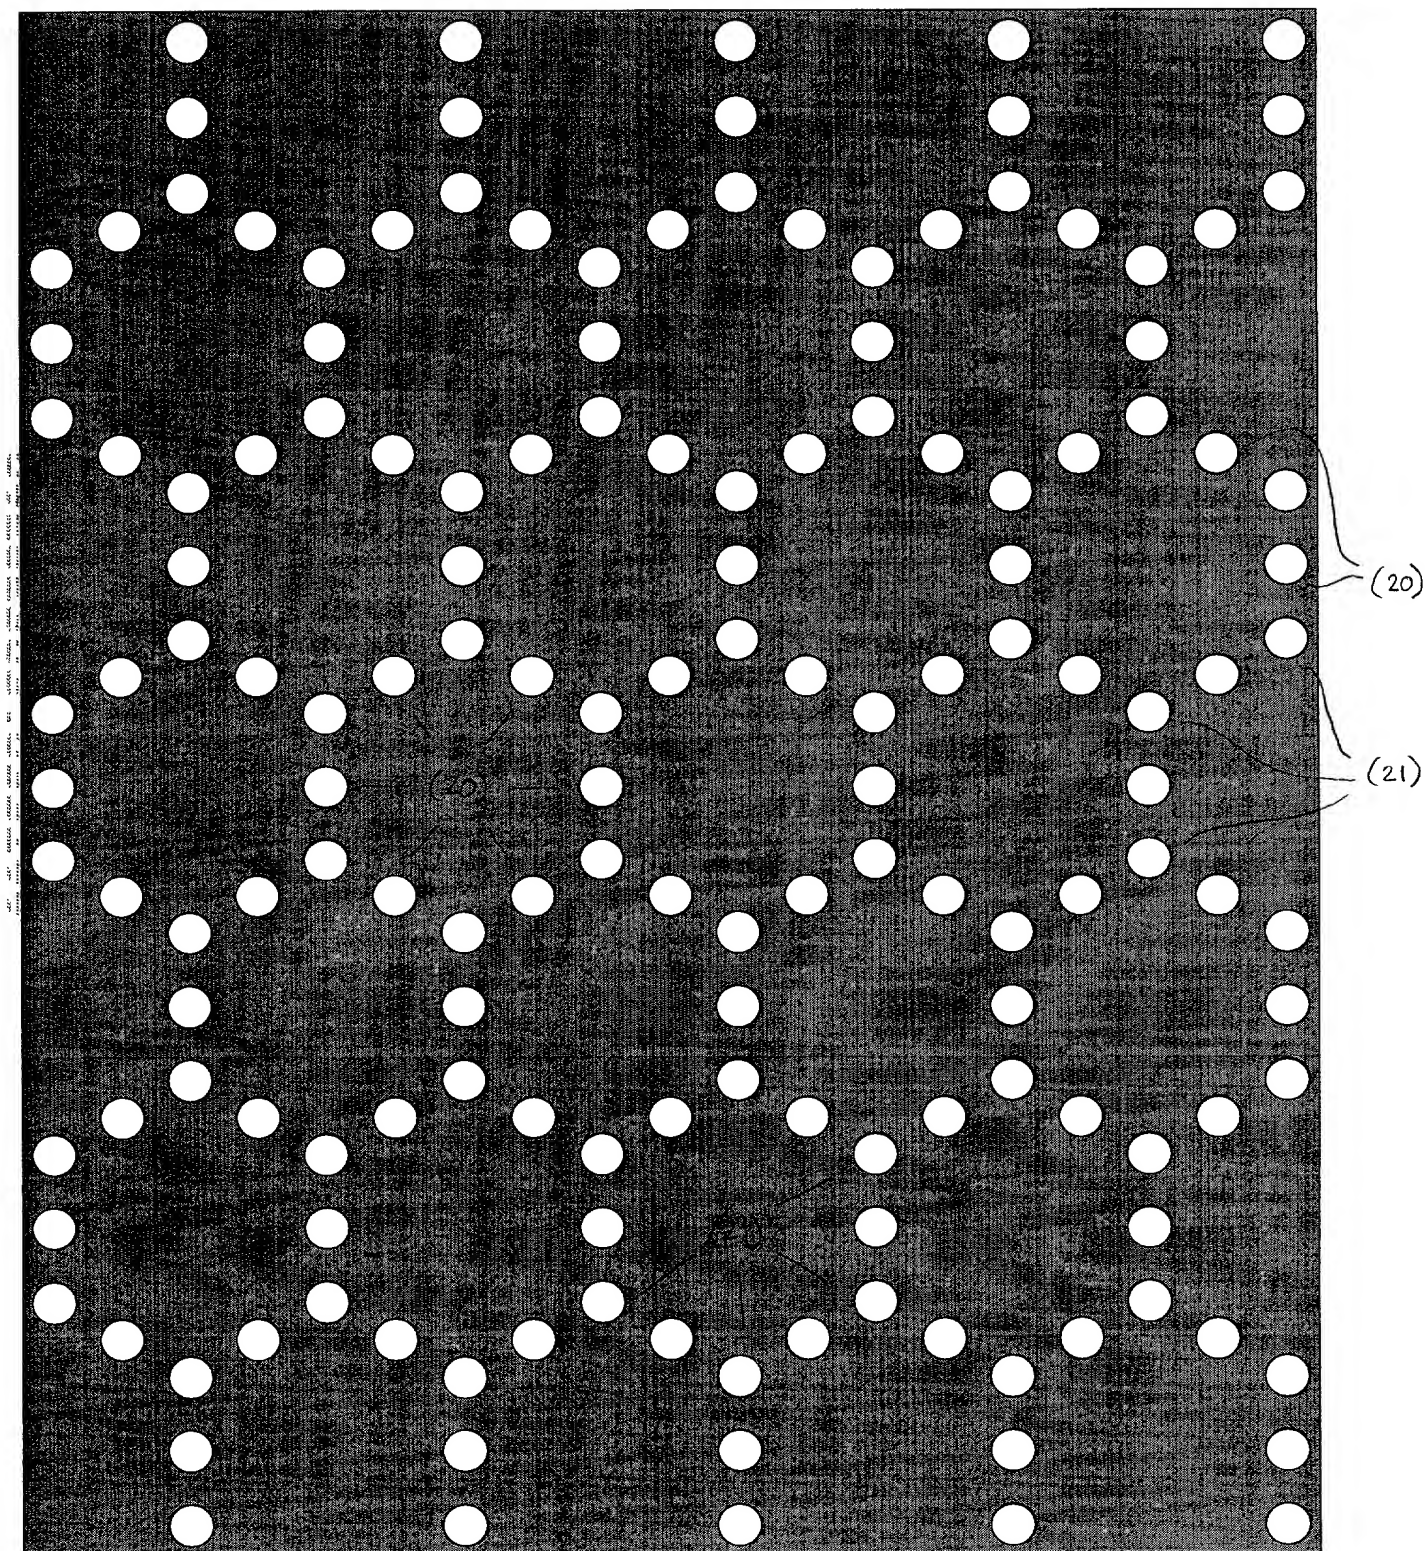


FIG 16

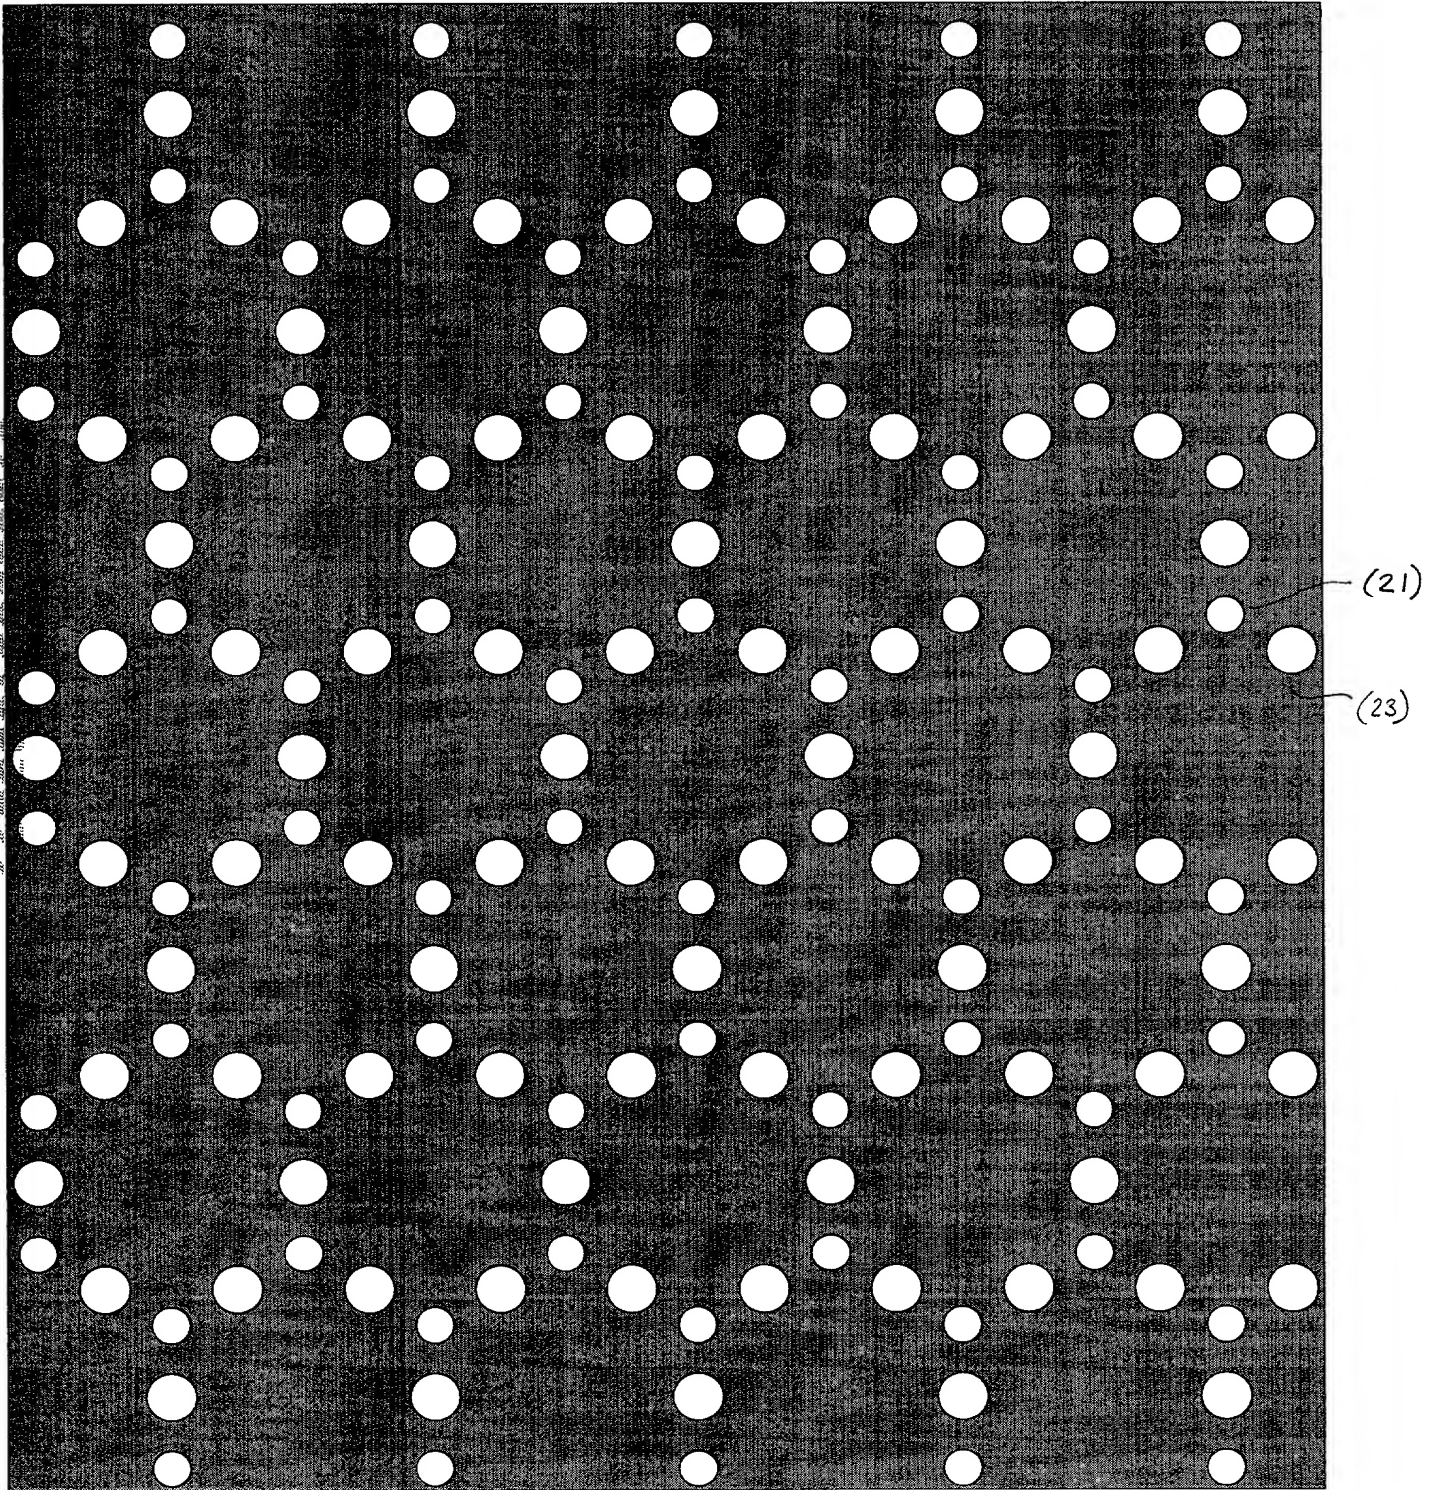


FIG. 18

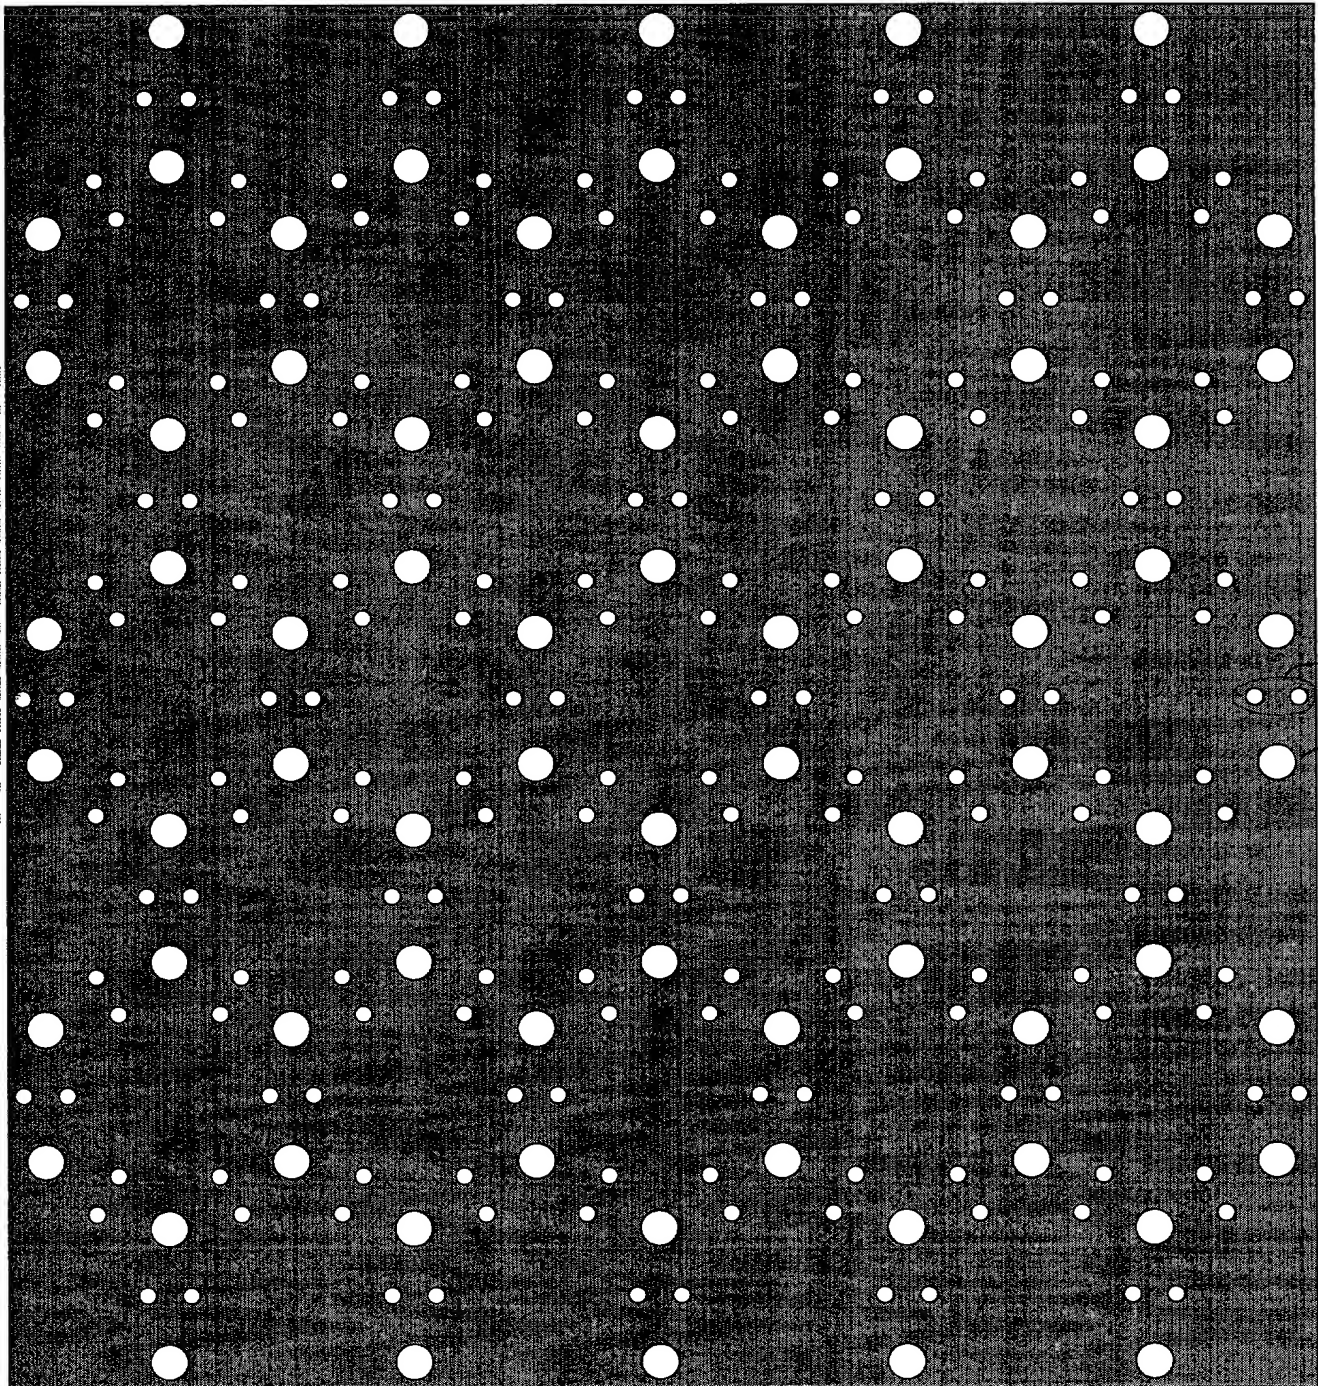


FIG. 19

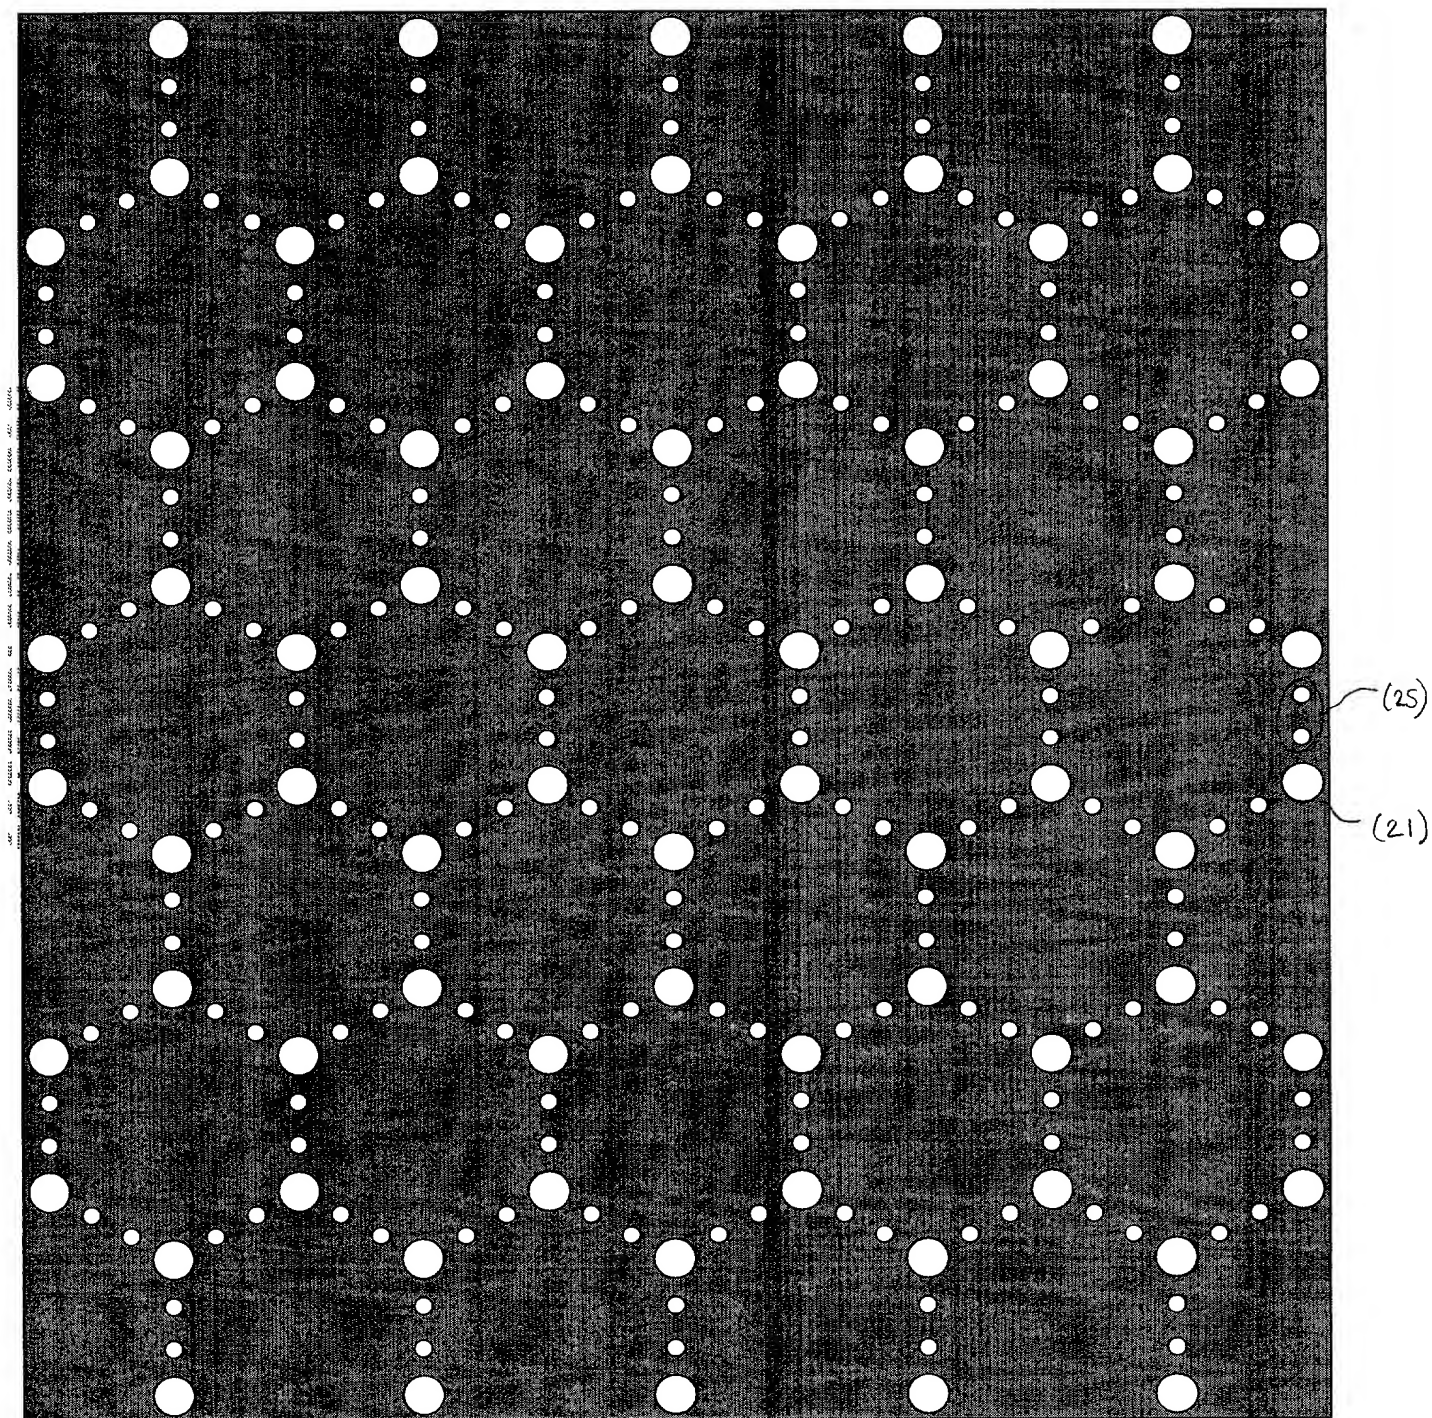


FIG. 20

FIG. 21


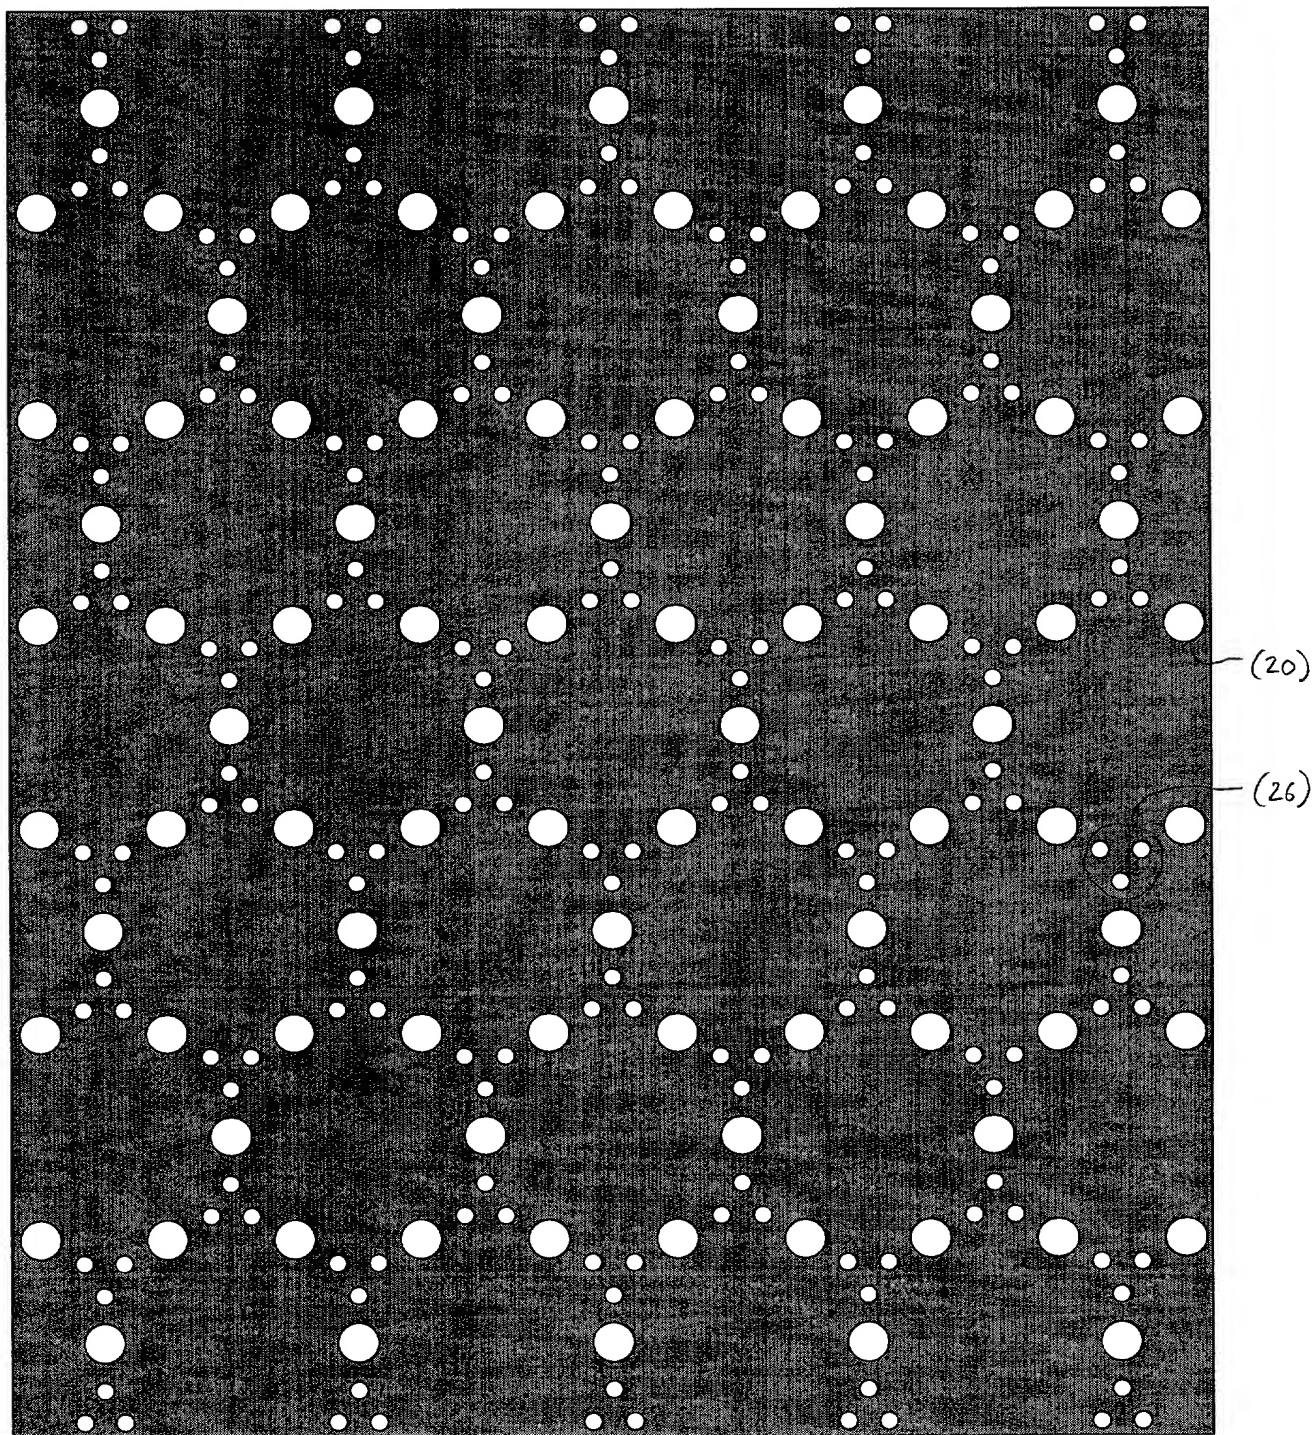


FIG. 21

FIG. 22

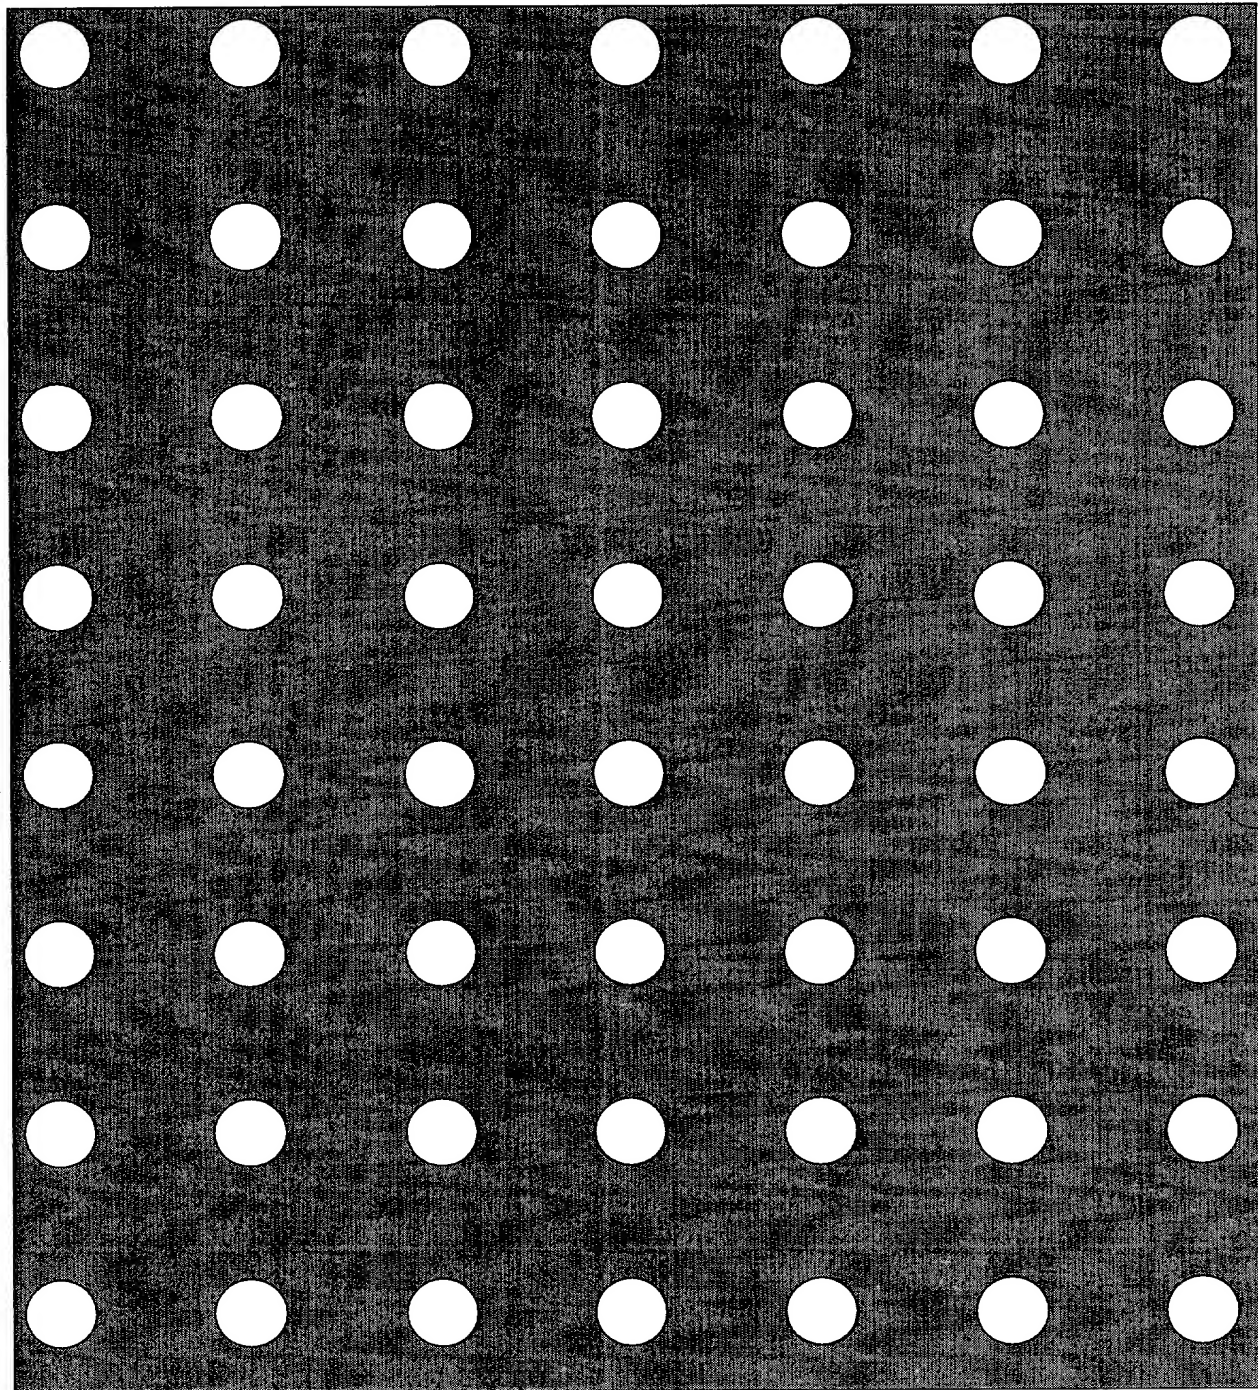

(27)

FIG. 22

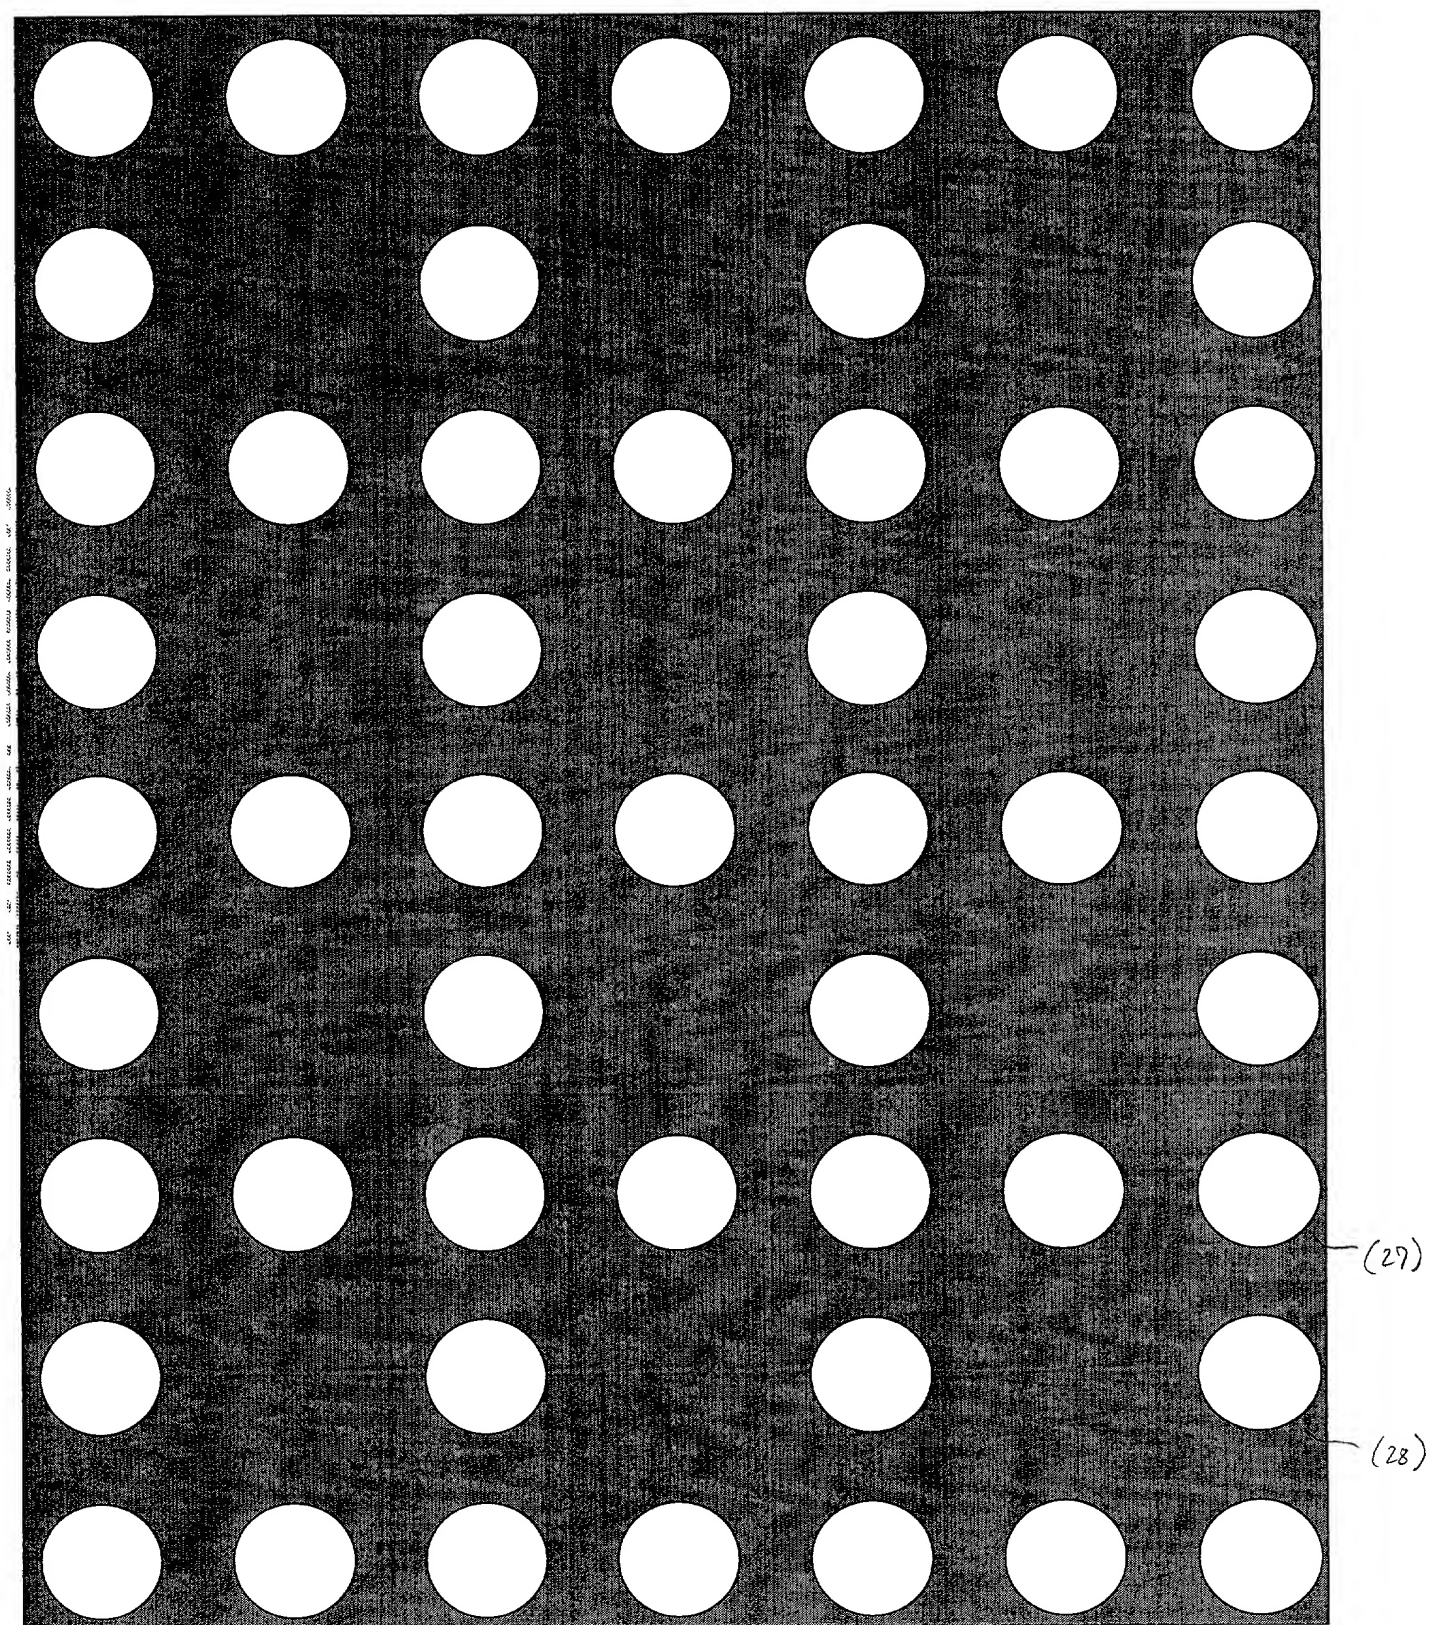


FIG 23

FIG. 24

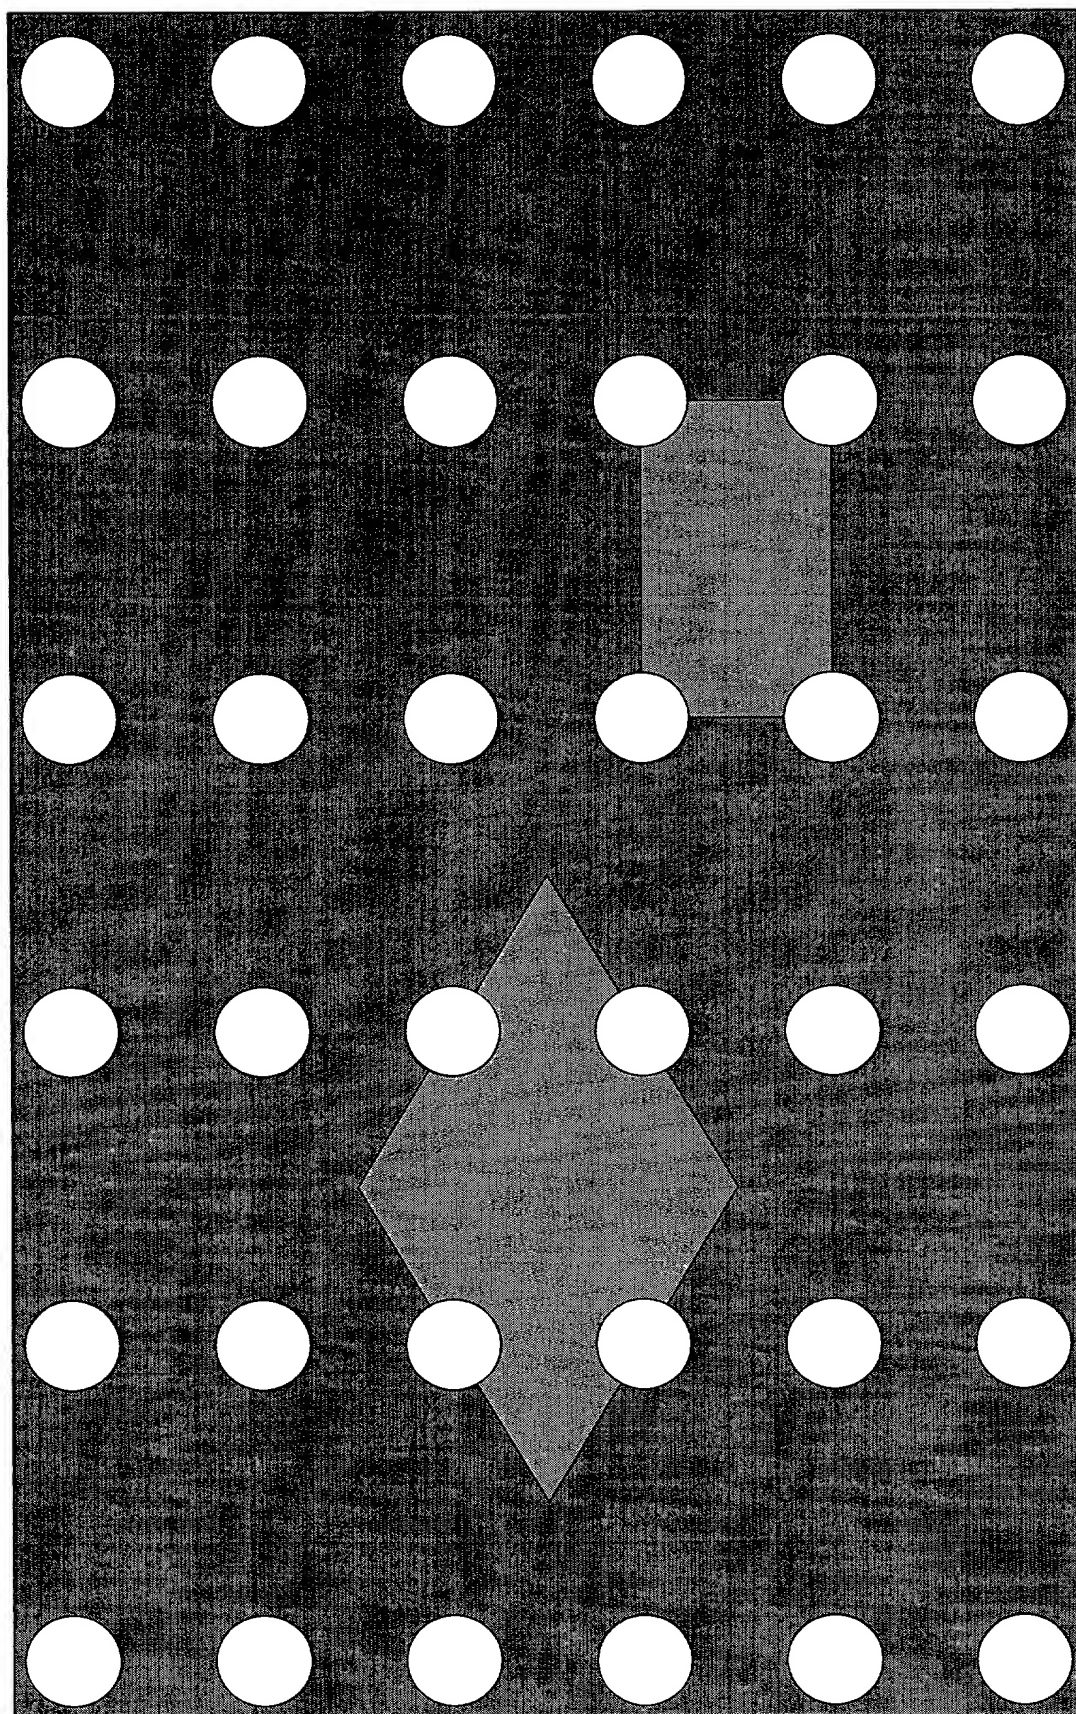


FIG 24

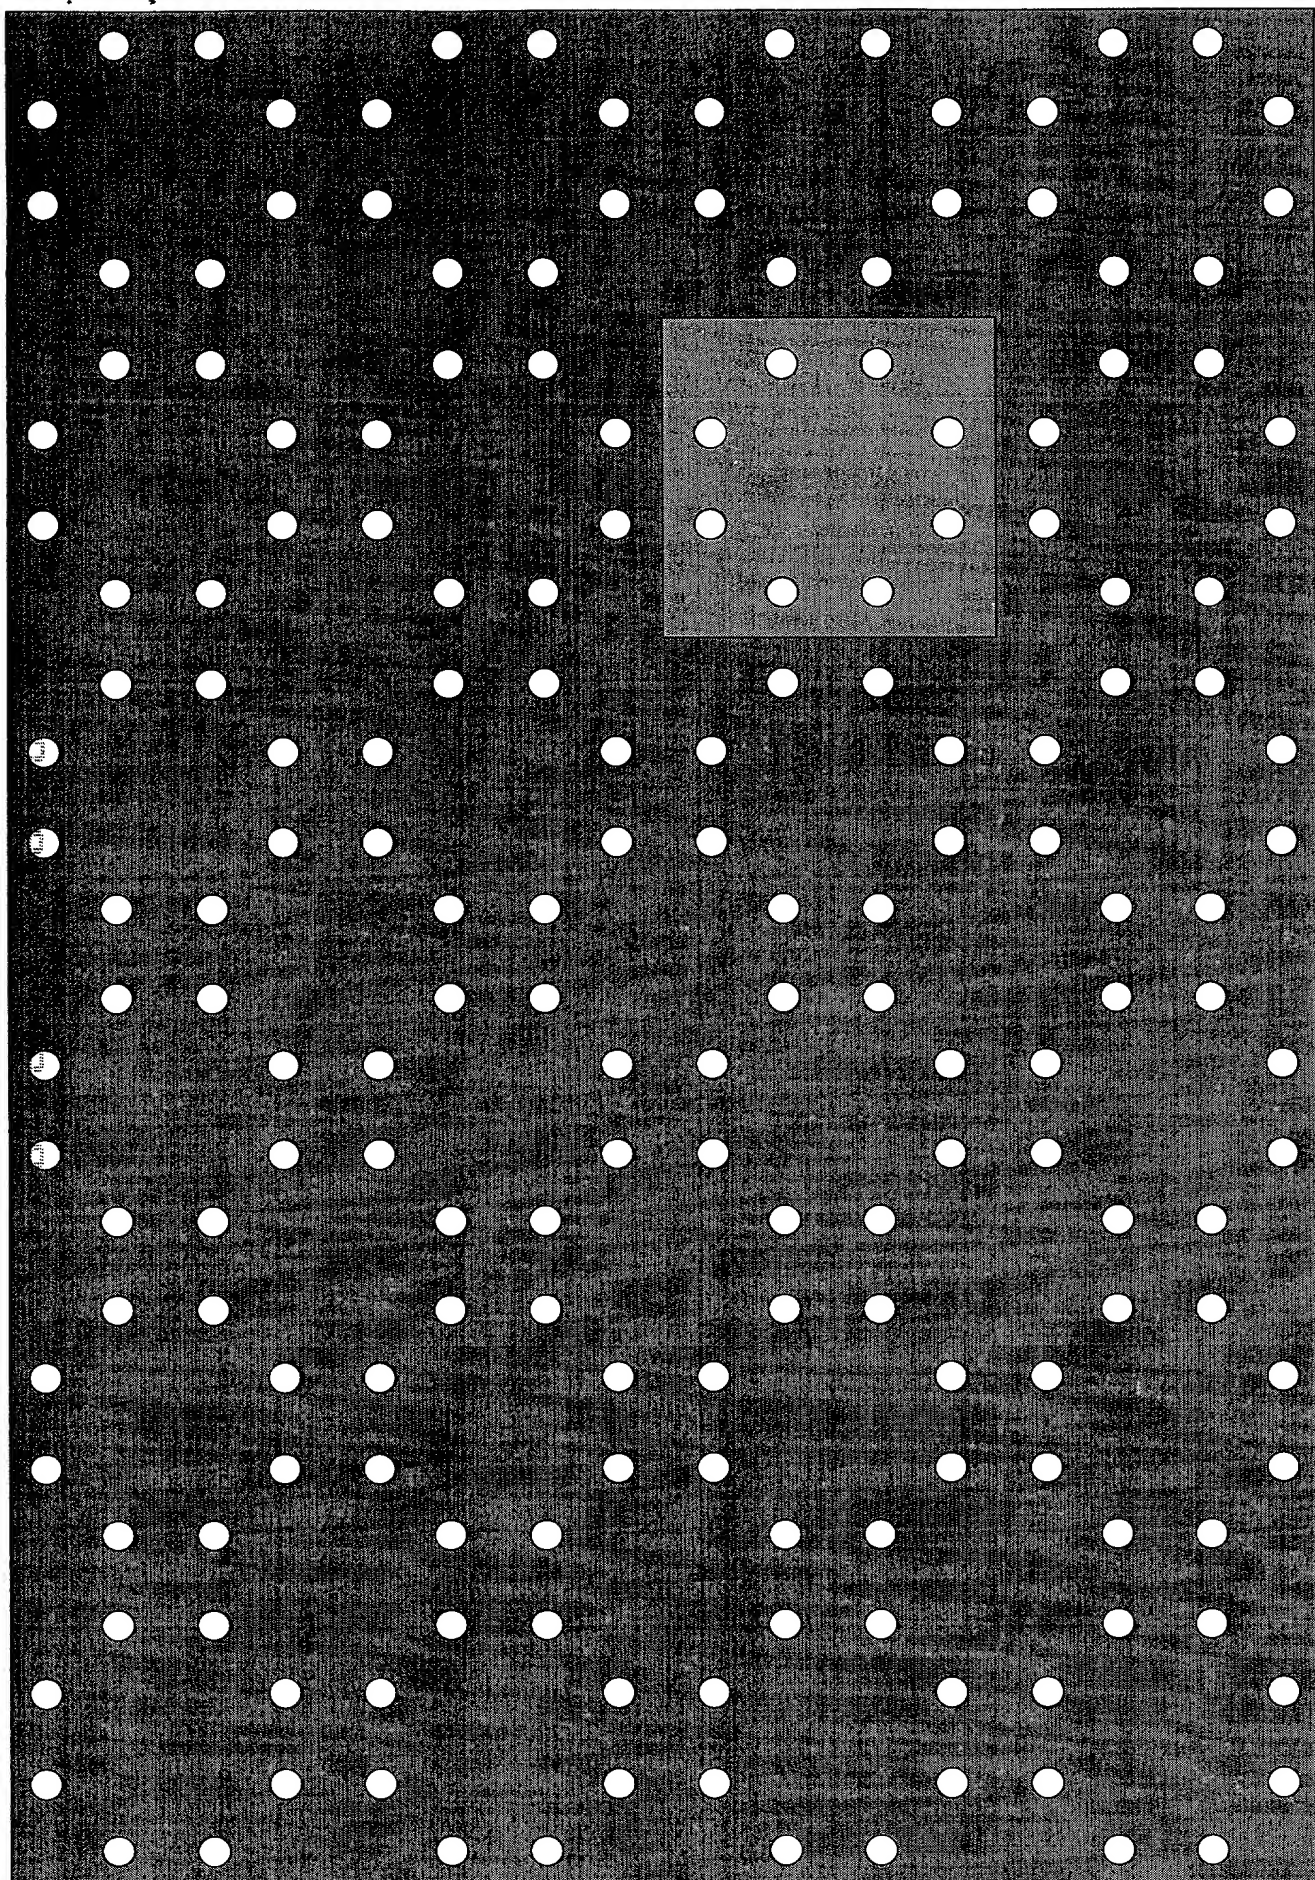


FIG. 25

Here is view the
60° grating symmetry?

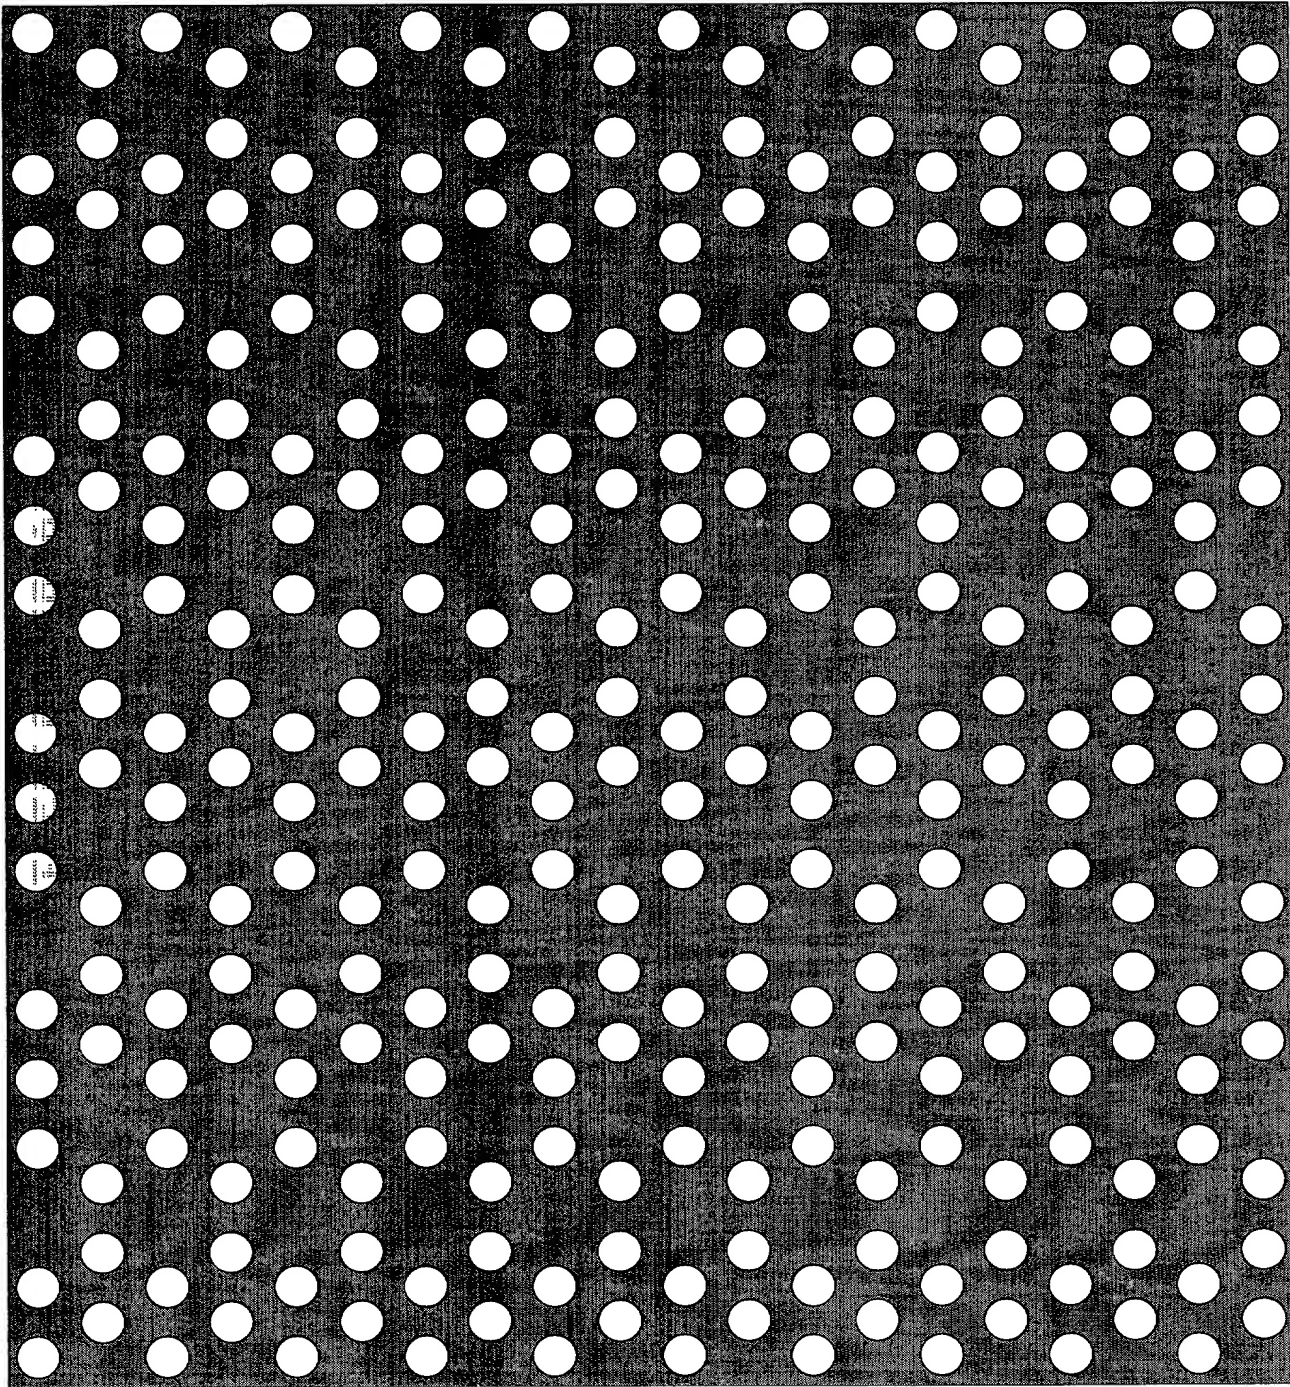


FIG. 26

Er dette periodisk?

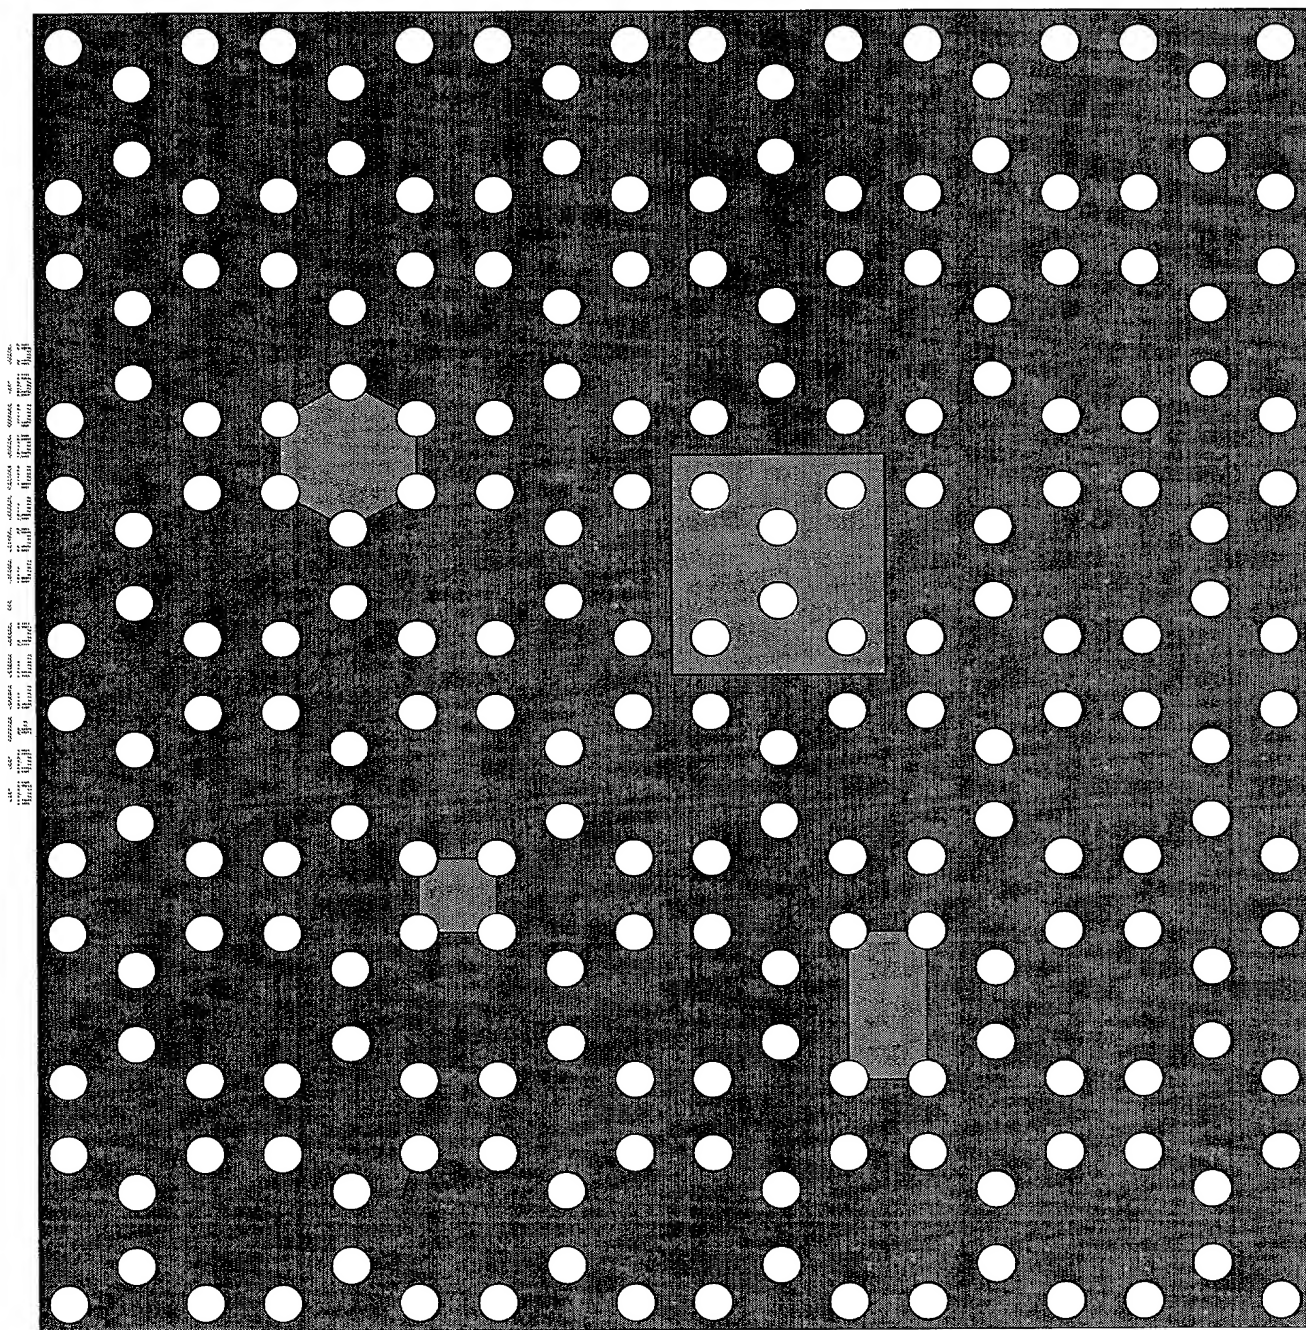


FIG. 27

FIG. 28 is a perspective view of a rectangular plate 30 having a grid of circular holes 31. The plate 30 is shown in a perspective view, and the grid of holes 31 is arranged in a regular pattern. The plate 30 is shown in a perspective view, and the grid of holes 31 is arranged in a regular pattern.

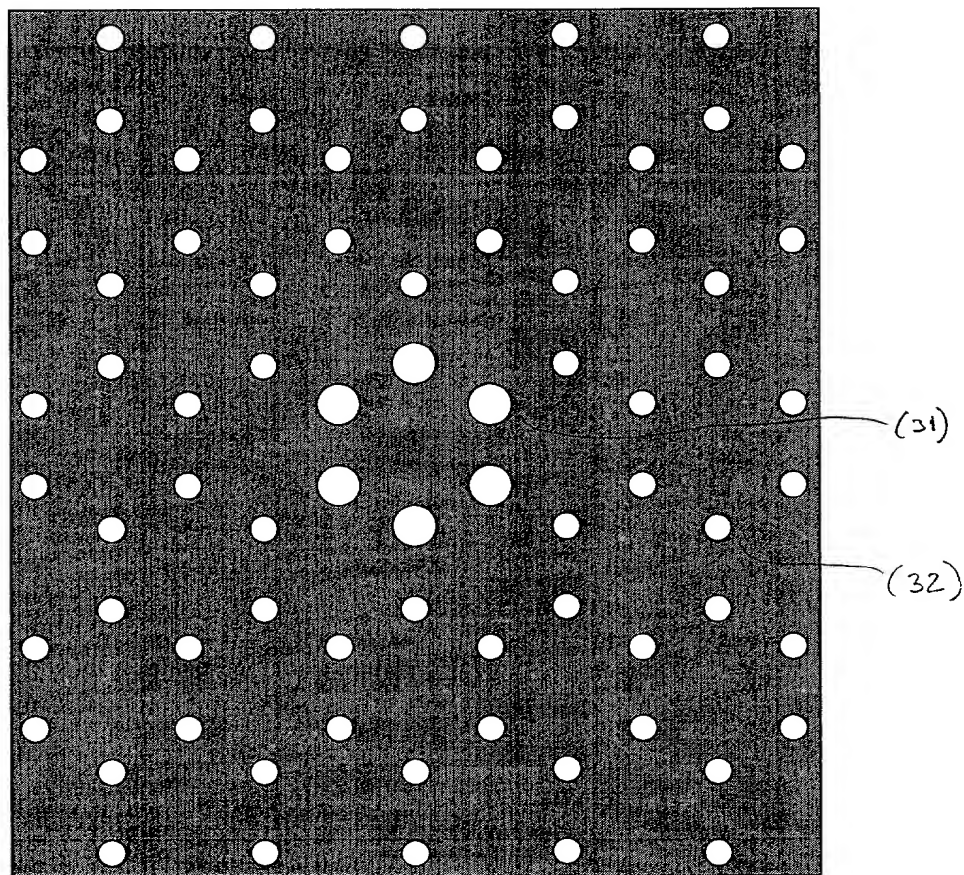


FIG 28

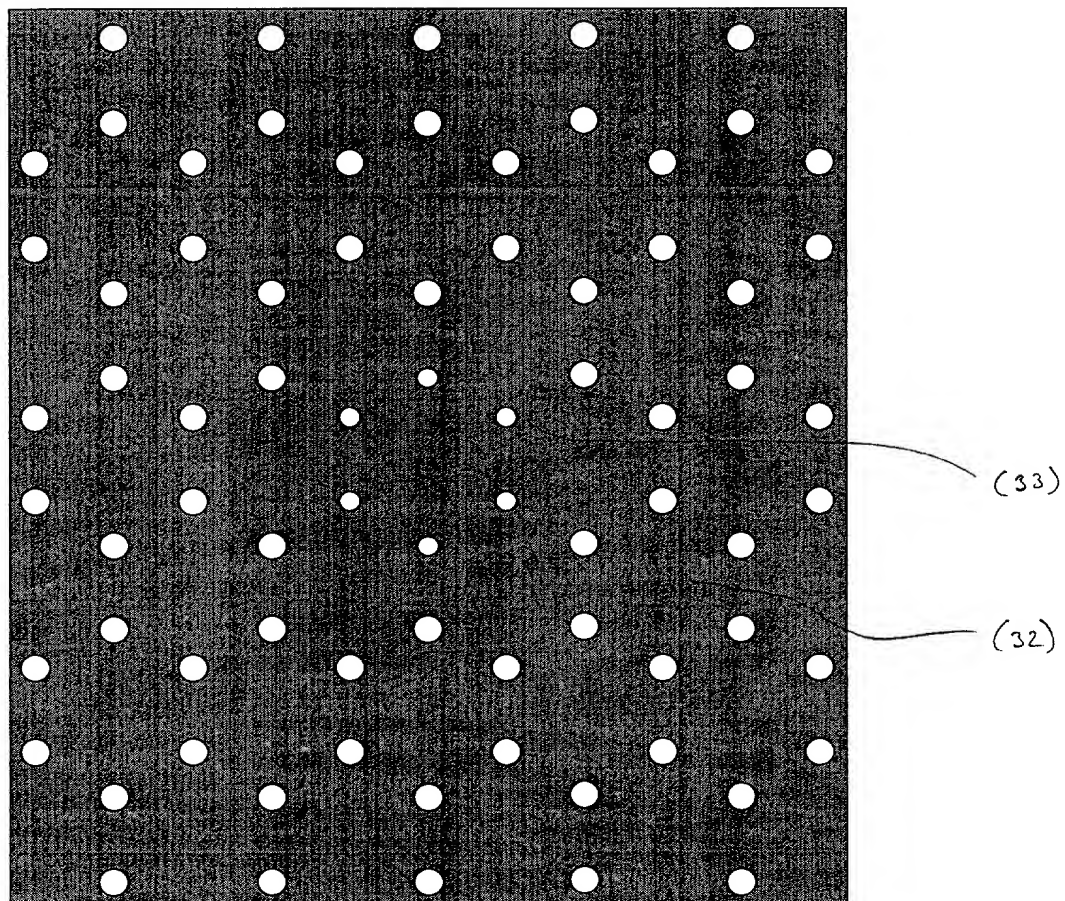


FIG. 29

FIG. 30 is a perspective view of a rectangular panel 30 having a grid of circular holes 32. The panel 30 is shown in a perspective view, and the grid of holes 32 is arranged in a regular pattern. The panel 30 is shown in a perspective view, and the grid of holes 32 is arranged in a regular pattern.

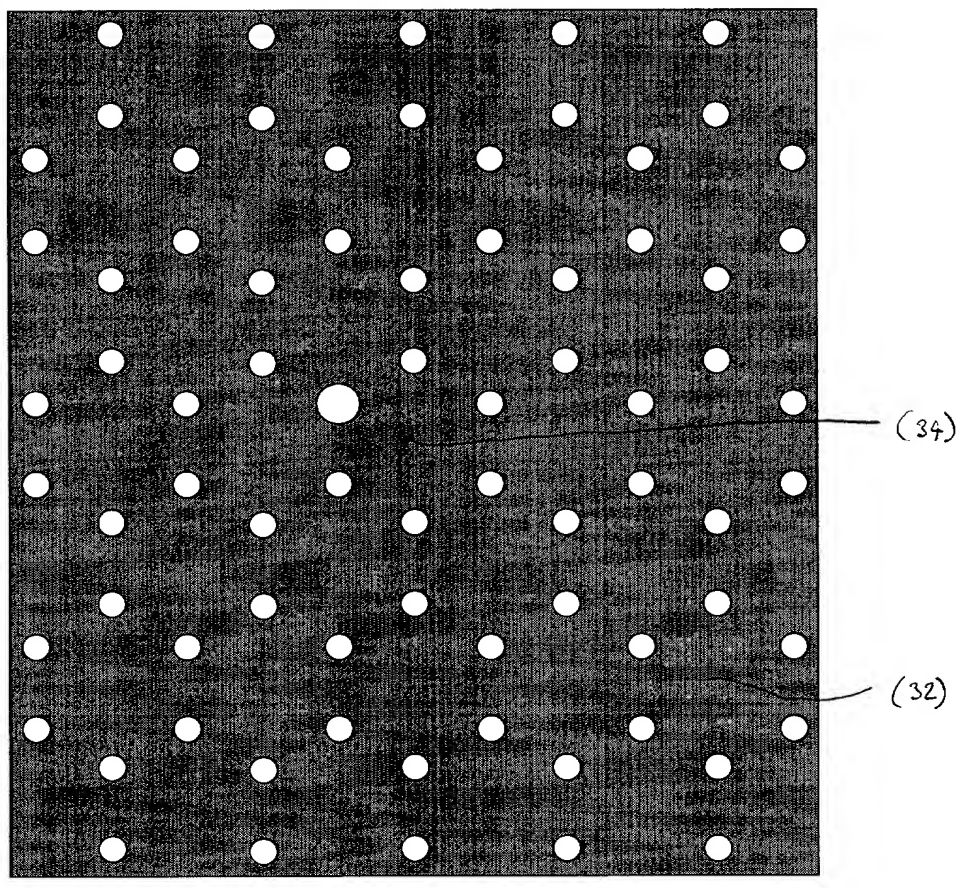


FIG. 30

FIG. 31 is a perspective view of a sheet 30 of material having a grid of circular holes 32. The sheet 30 is shown in a perspective view, and the grid of holes 32 is formed by a series of parallel lines 34 intersecting at right angles to form a grid of squares. The holes 32 are located at the intersections of the lines 34. The sheet 30 is shown in a perspective view, and the grid of holes 32 is formed by a series of parallel lines 34 intersecting at right angles to form a grid of squares. The holes 32 are located at the intersections of the lines 34.

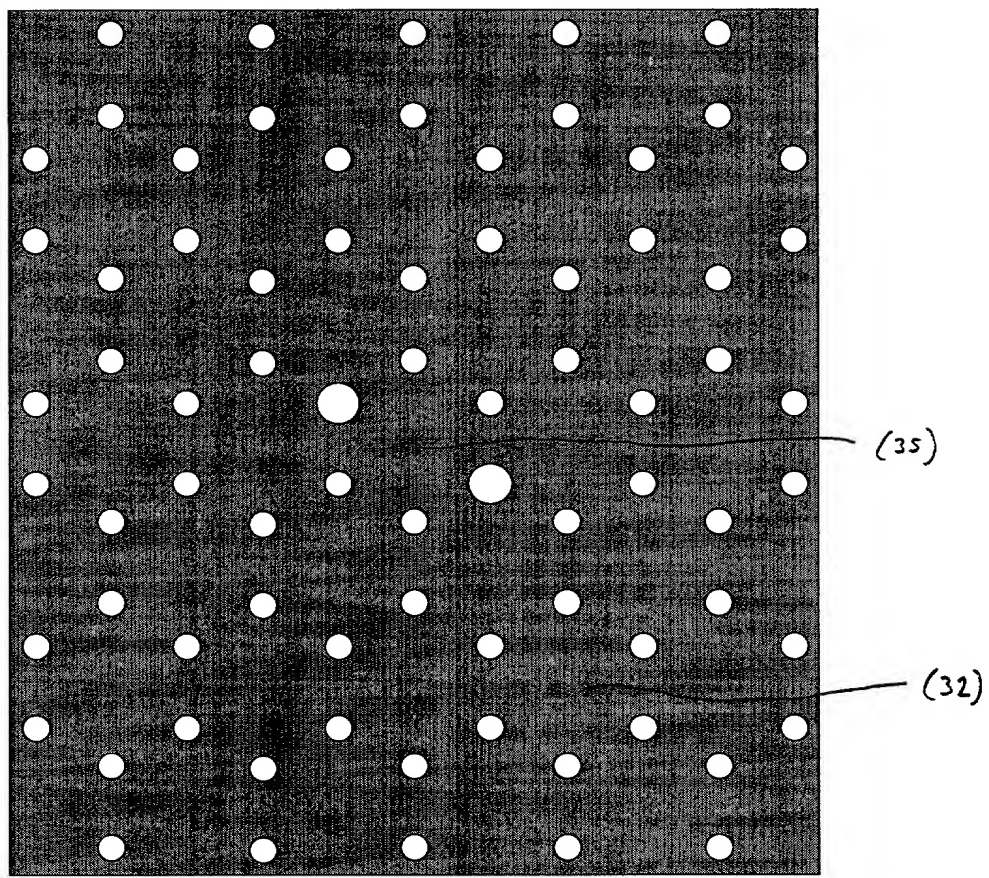


FIG. 31

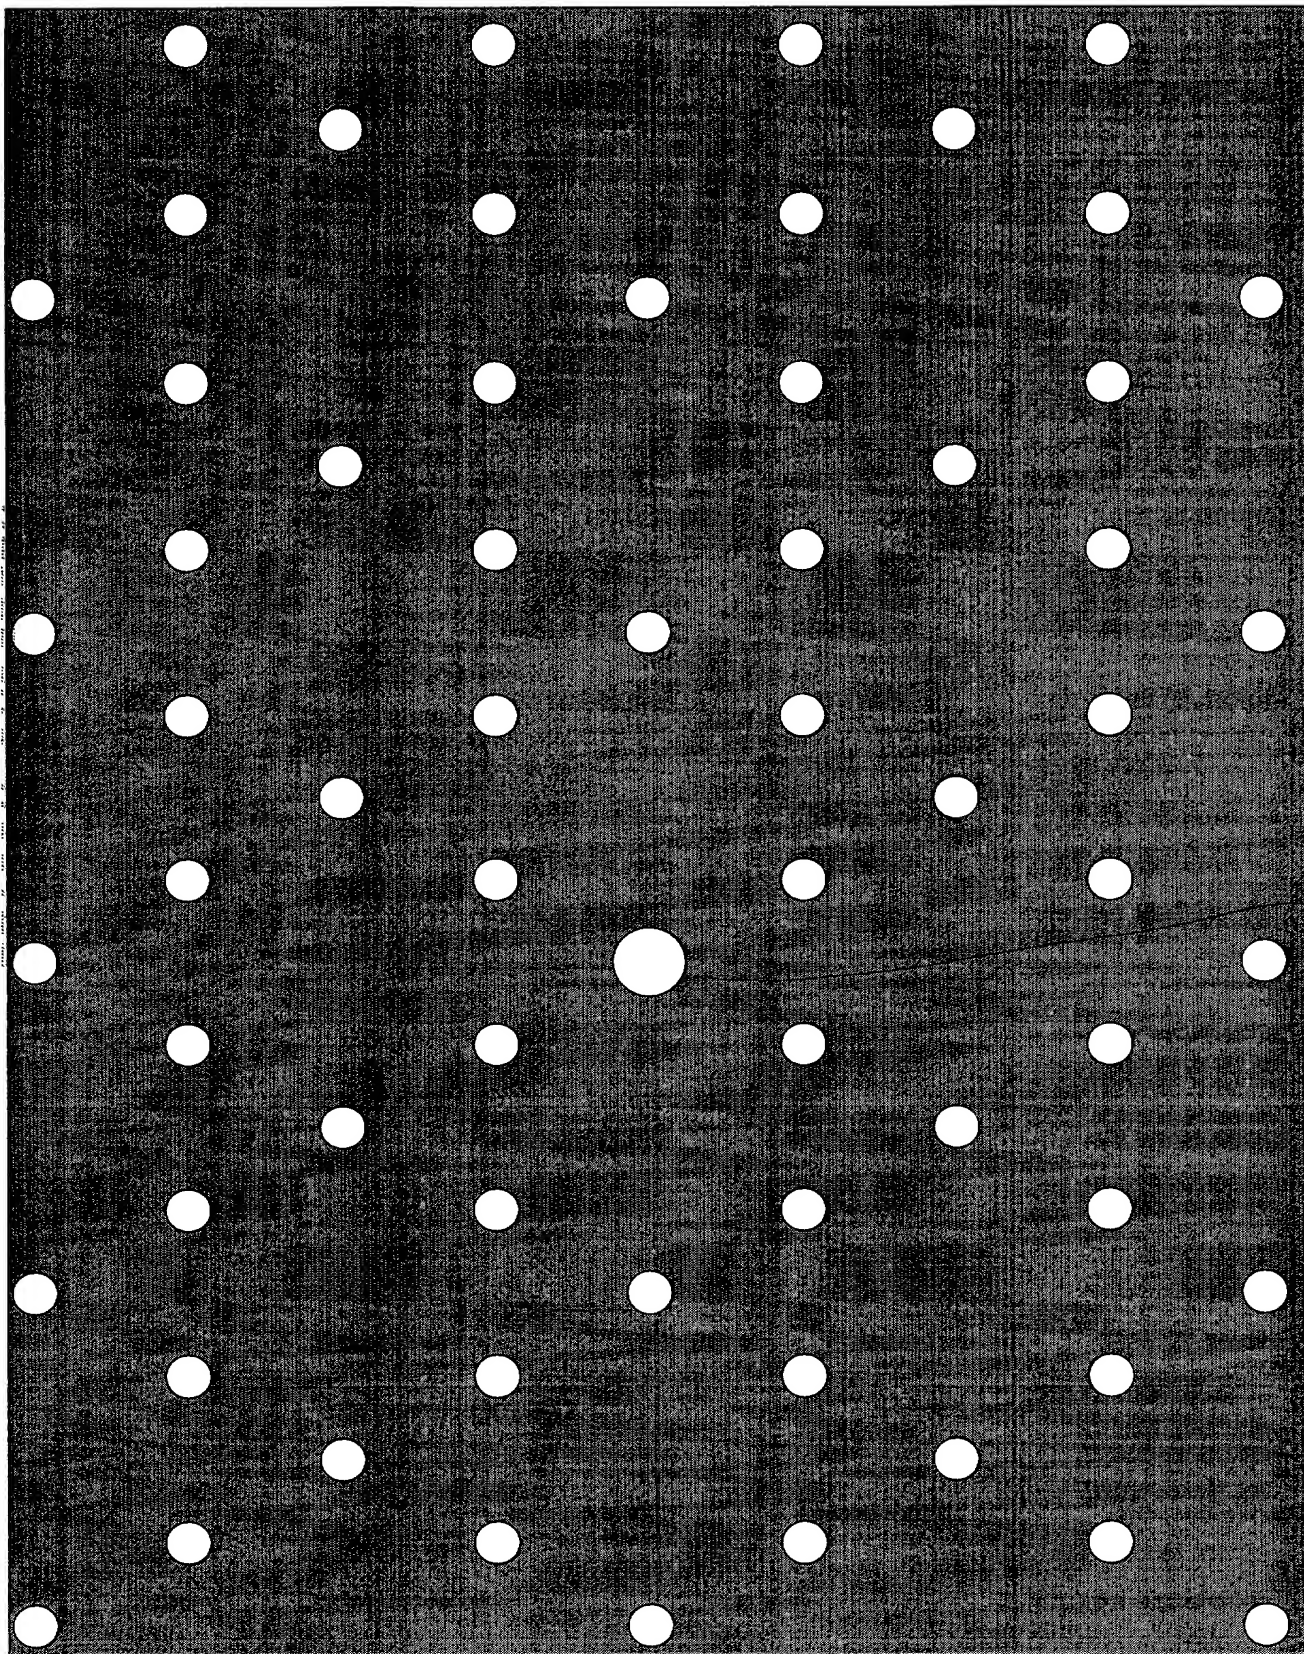


FIG 32

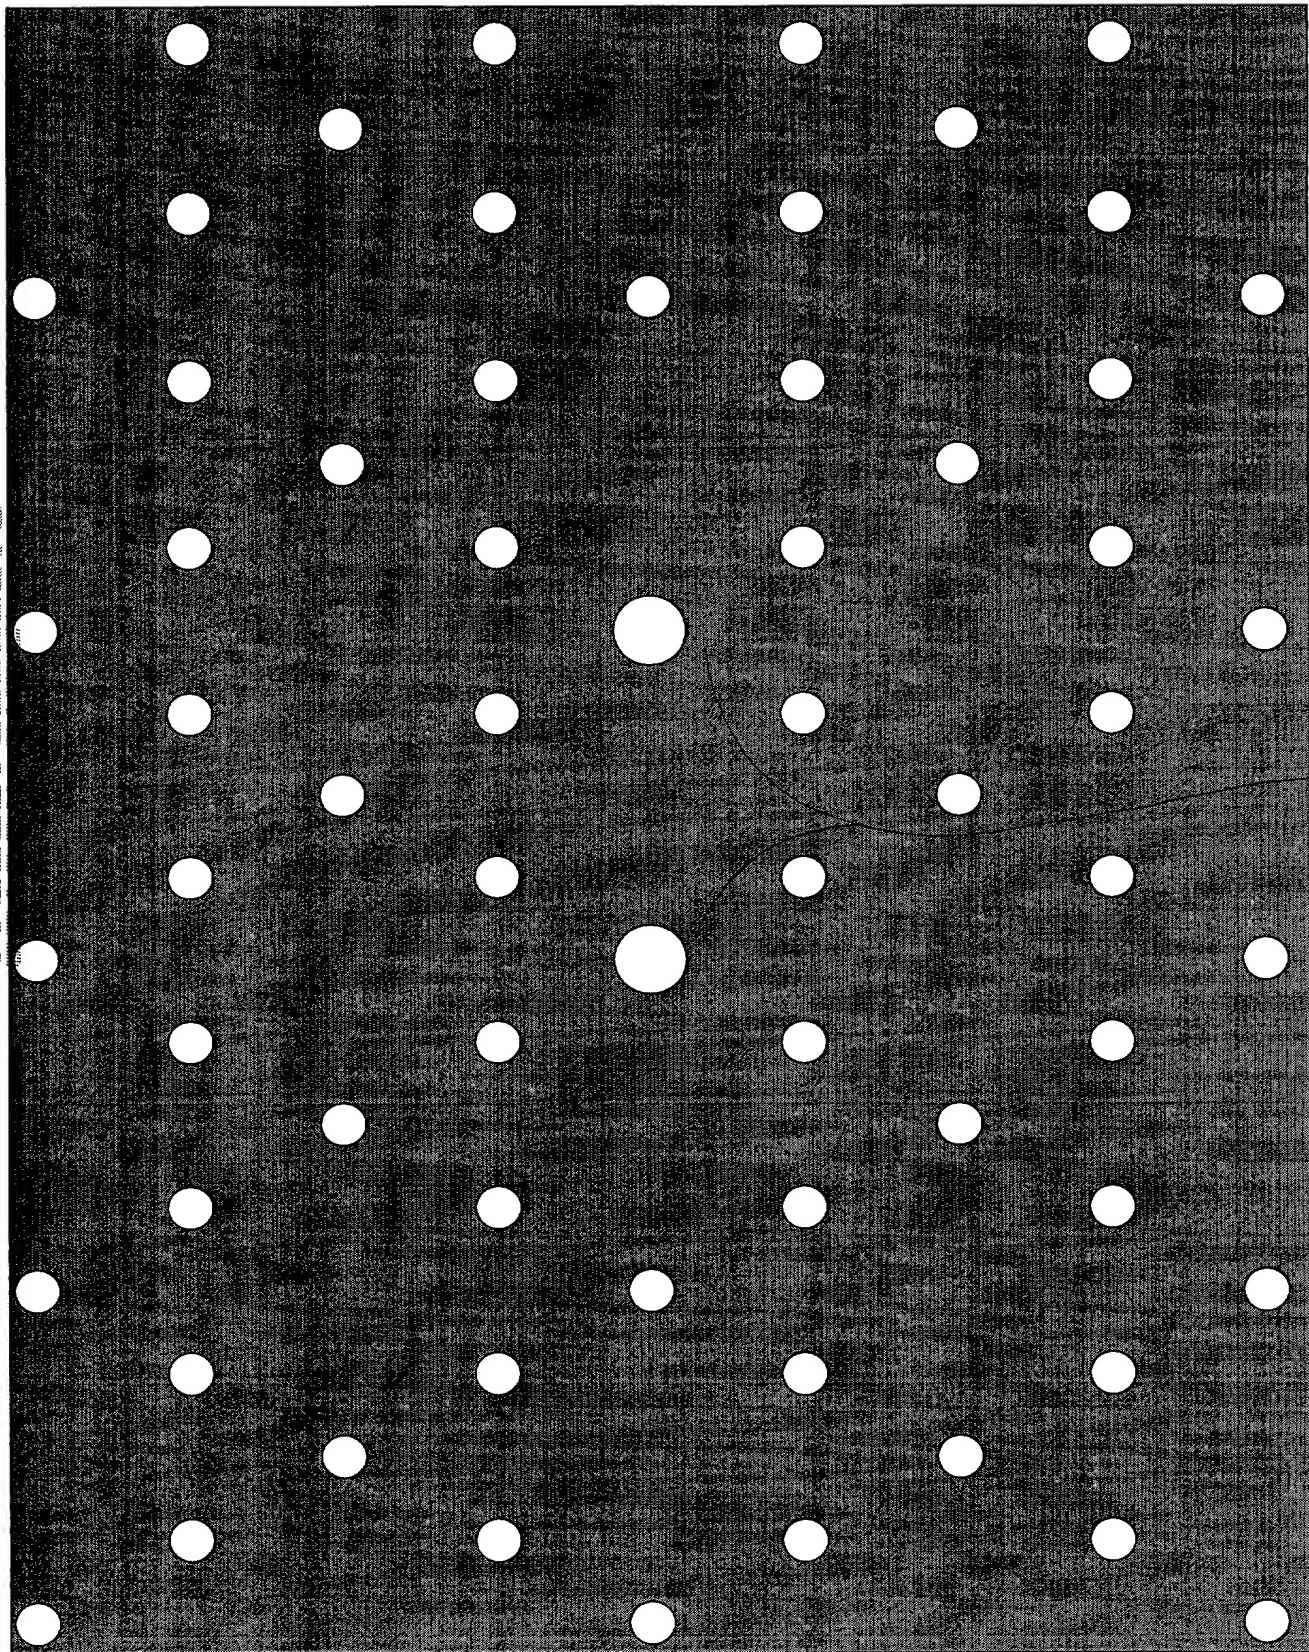


FIG. 33

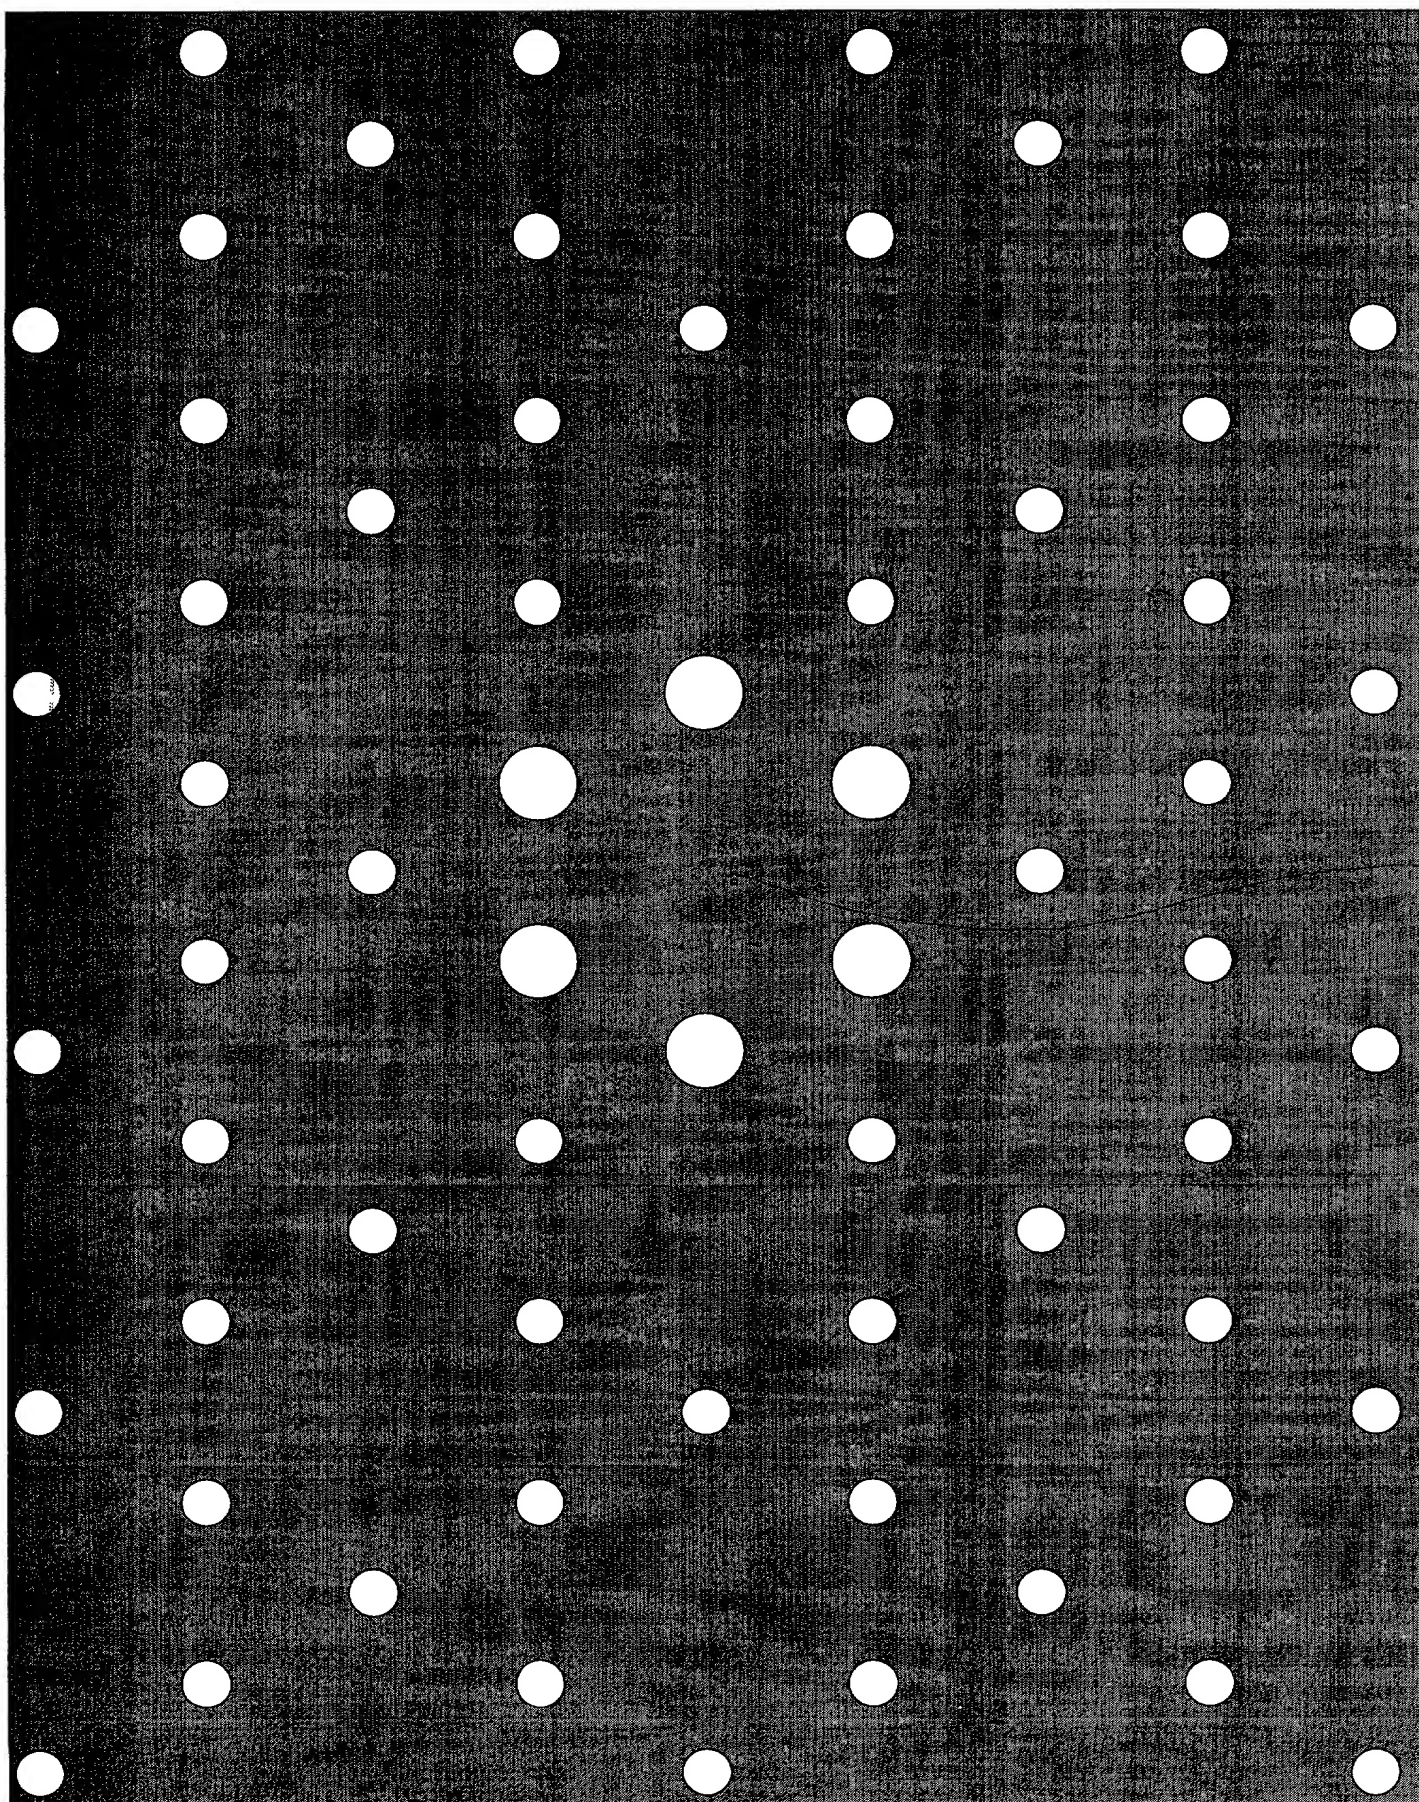


FIG. 34

TIR

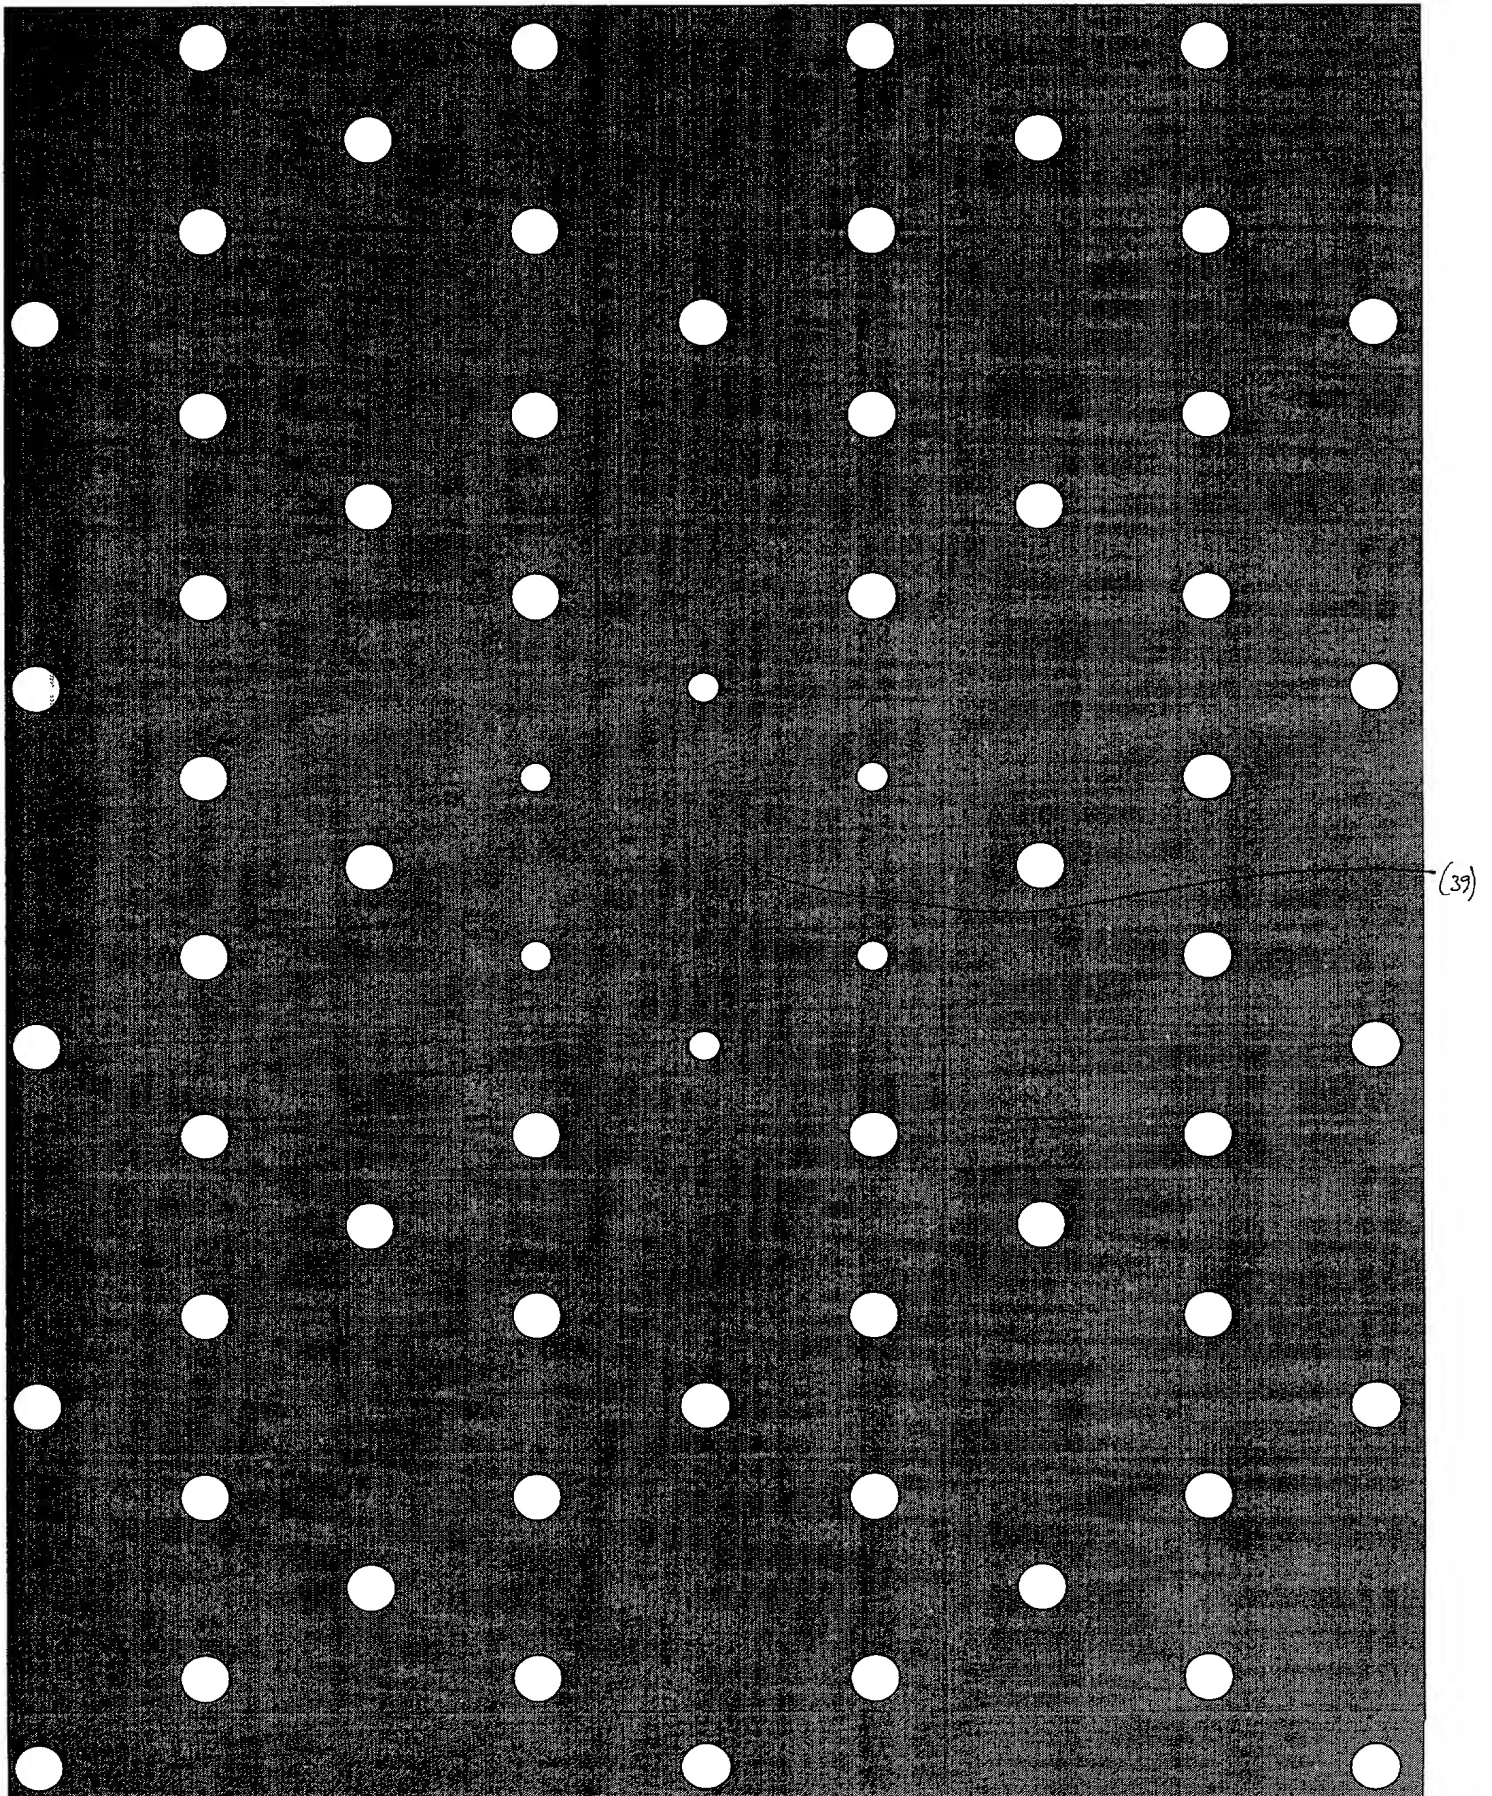


FIG. 35


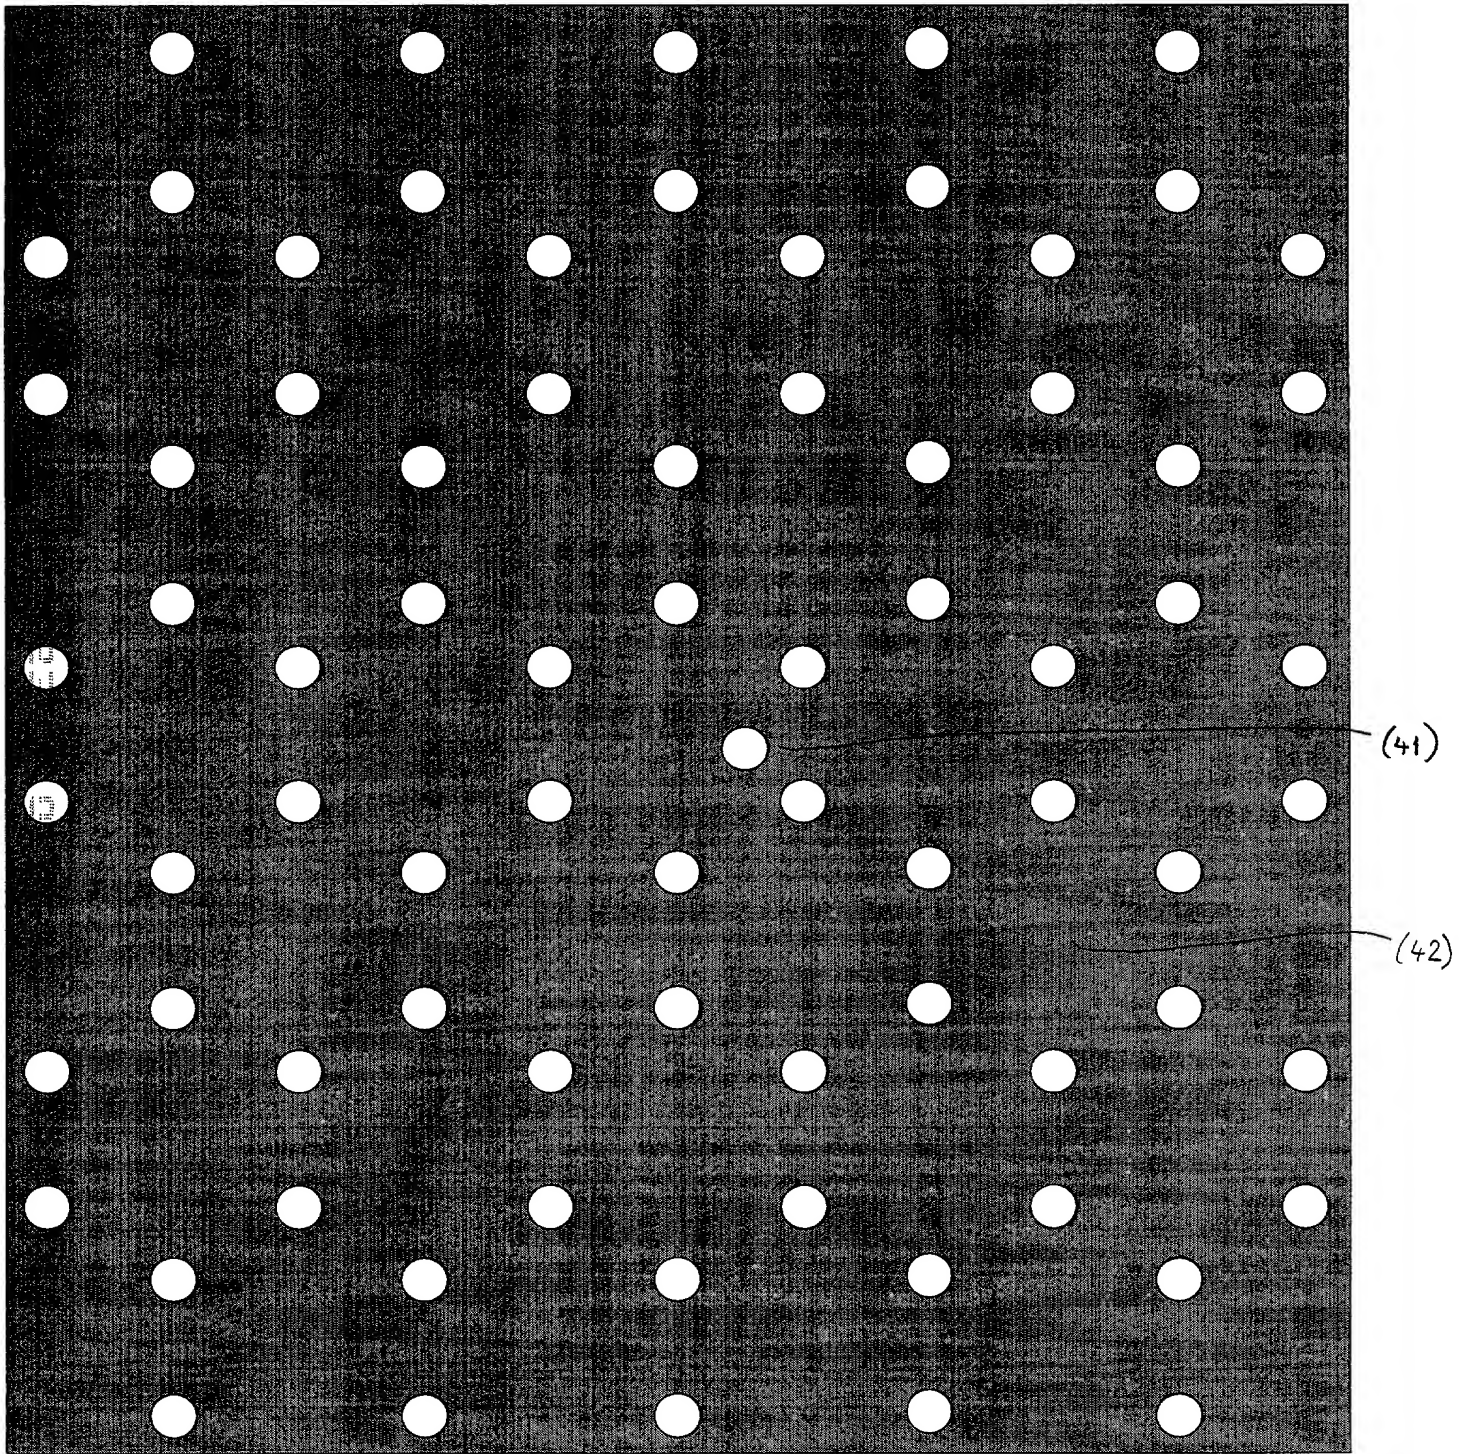


FIG. 36

FIG. 32

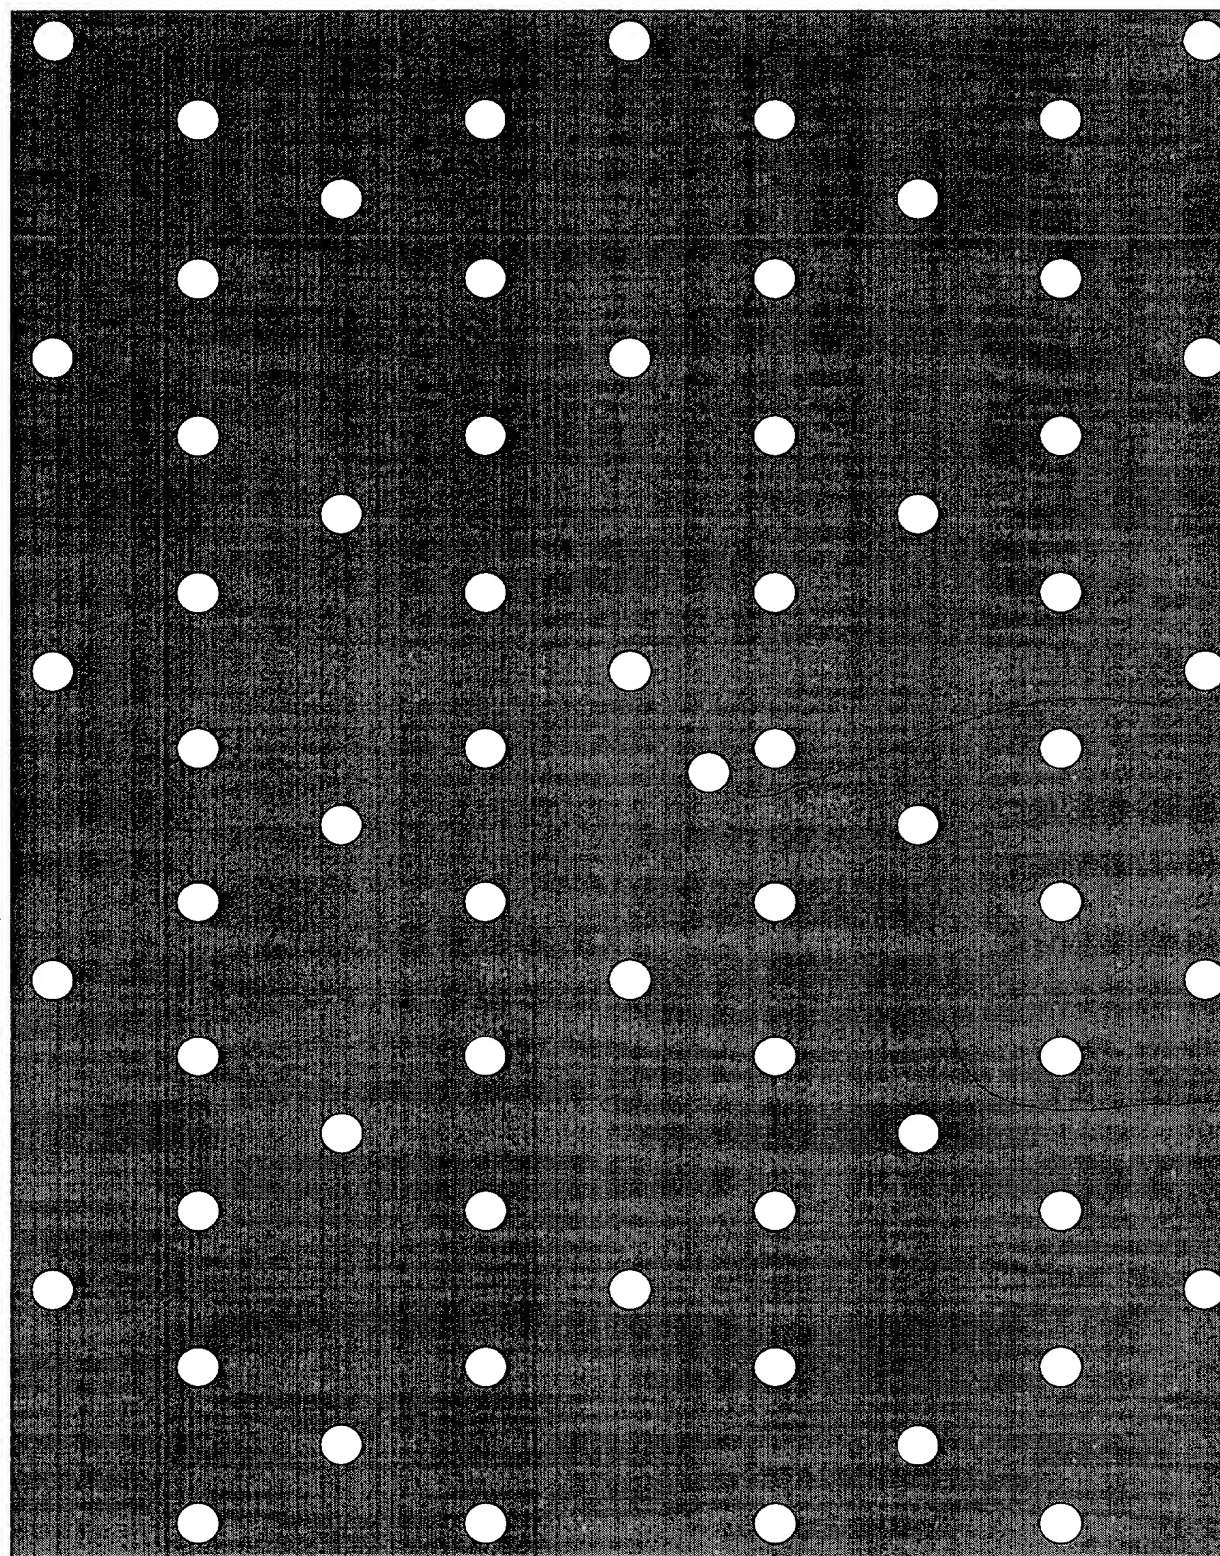


(43)

(44)

FIG. 32

FIG. 38 is a perspective view of a perforated sheet 40, showing a grid of circular holes 42. The sheet 40 is shown in a perspective view, and the holes 42 are arranged in a regular grid pattern. The sheet 40 is labeled with the reference numeral 40, and the holes 42 are labeled with the reference numeral 42. The sheet 40 is shown in a perspective view, and the holes 42 are arranged in a regular grid pattern.

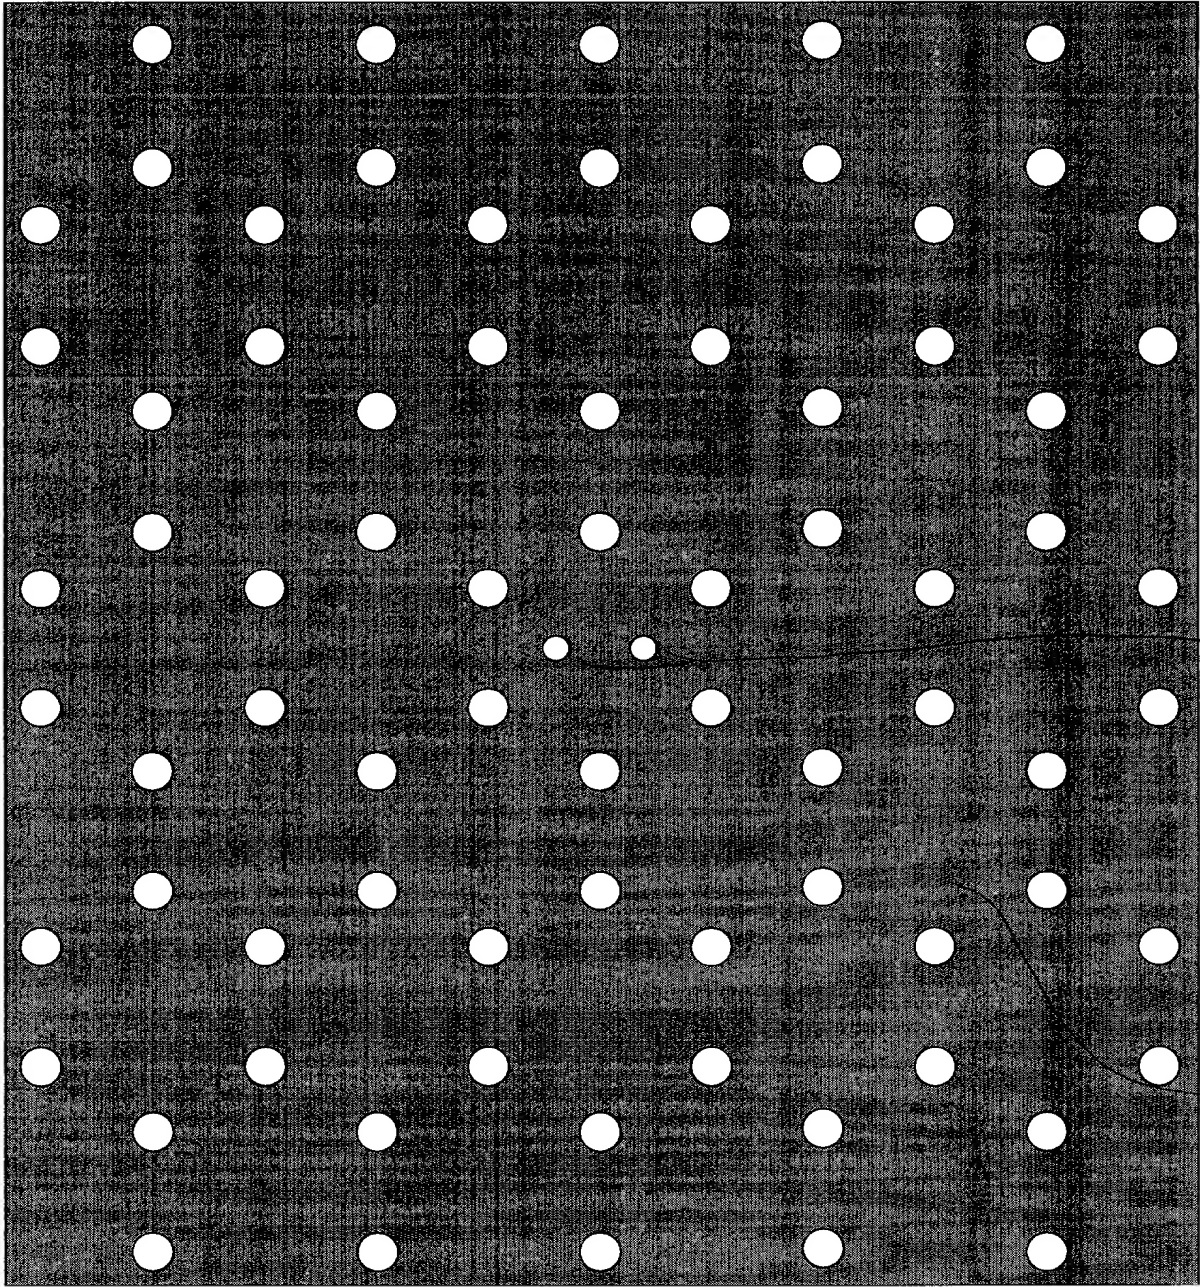

(45)

(42)

FIG. 38

FIG. 39 is a perspective view of a perforated sheet 40, showing a grid of circular holes 42. A line 46 indicates a fold or crease in the sheet.

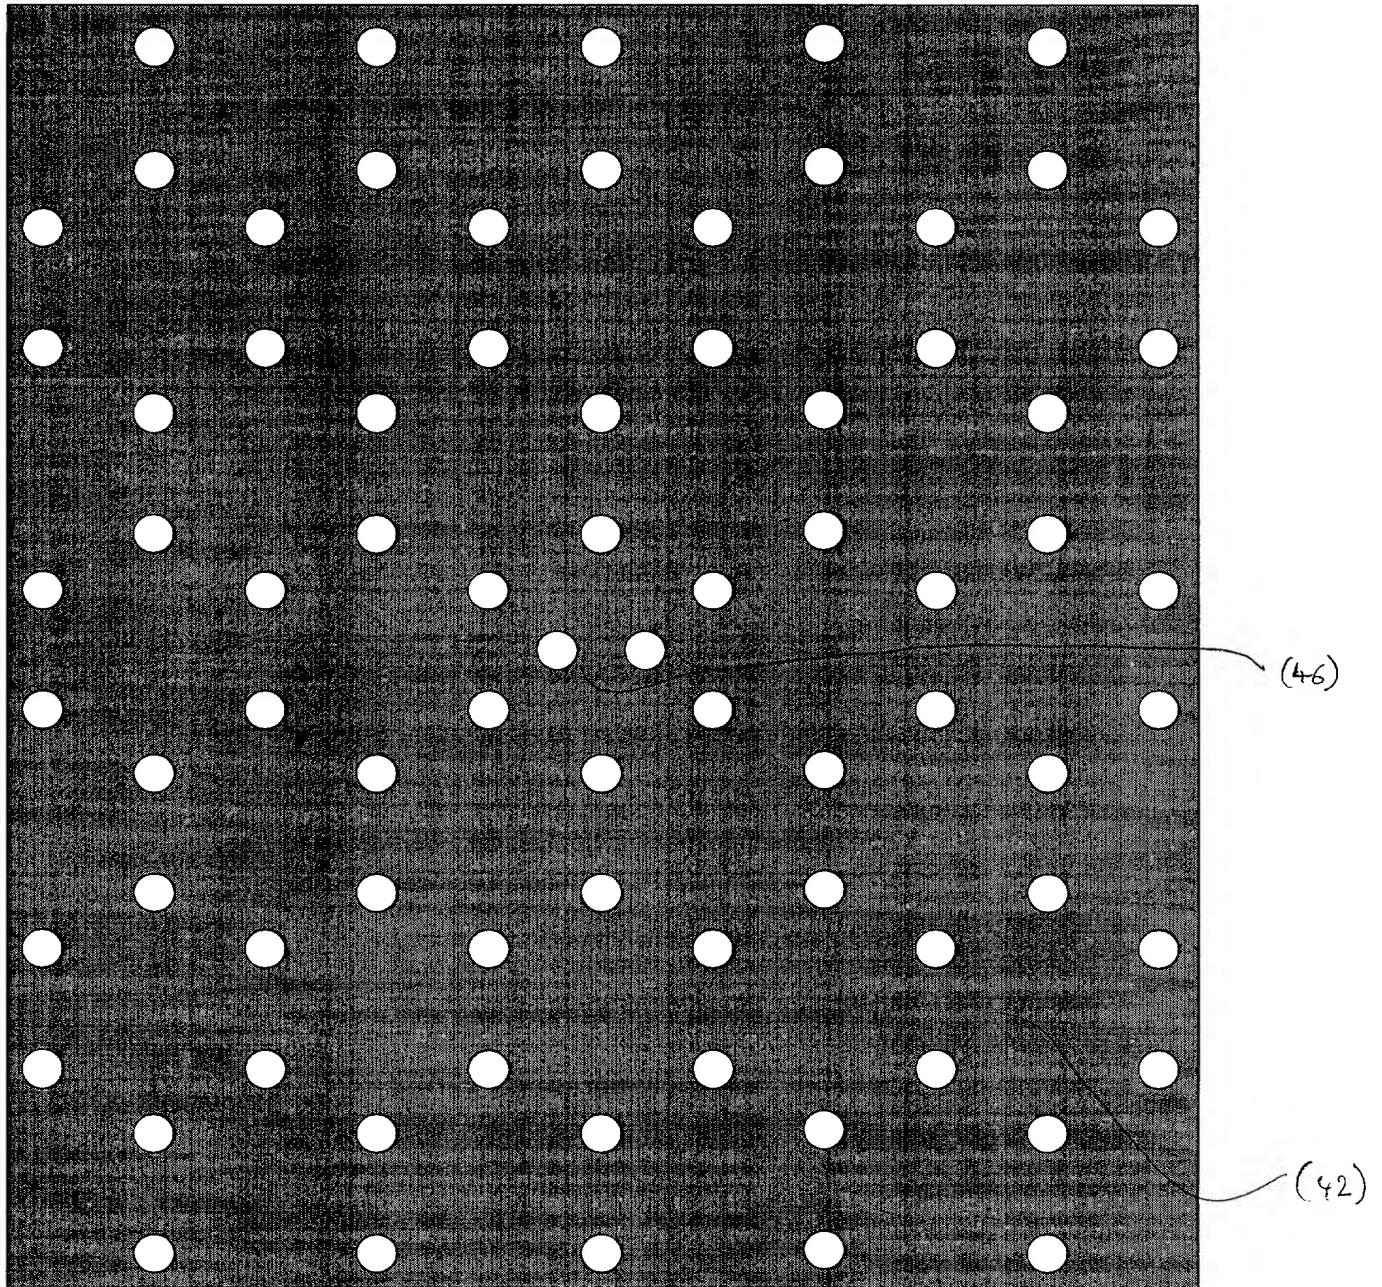


FIG. 39

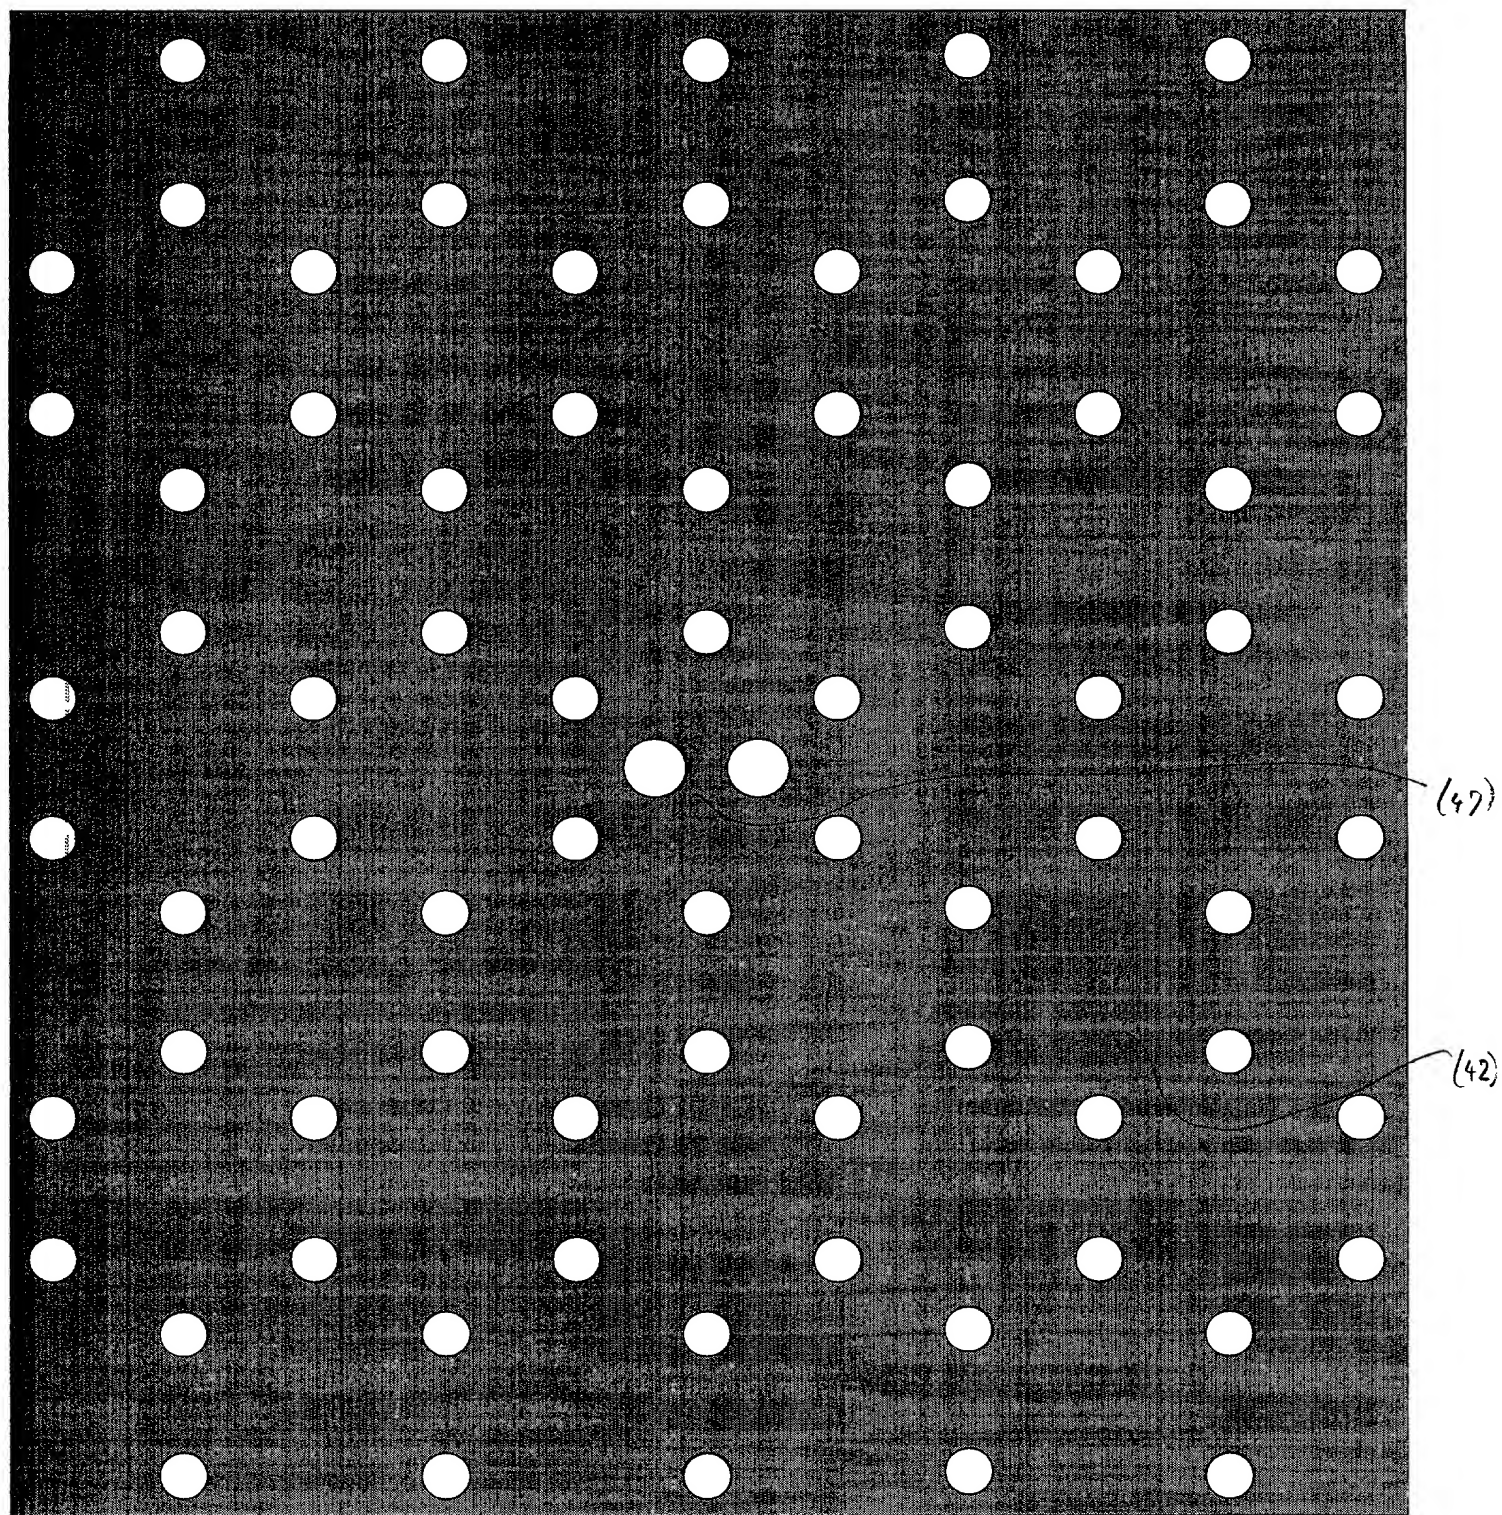


FIG. 40

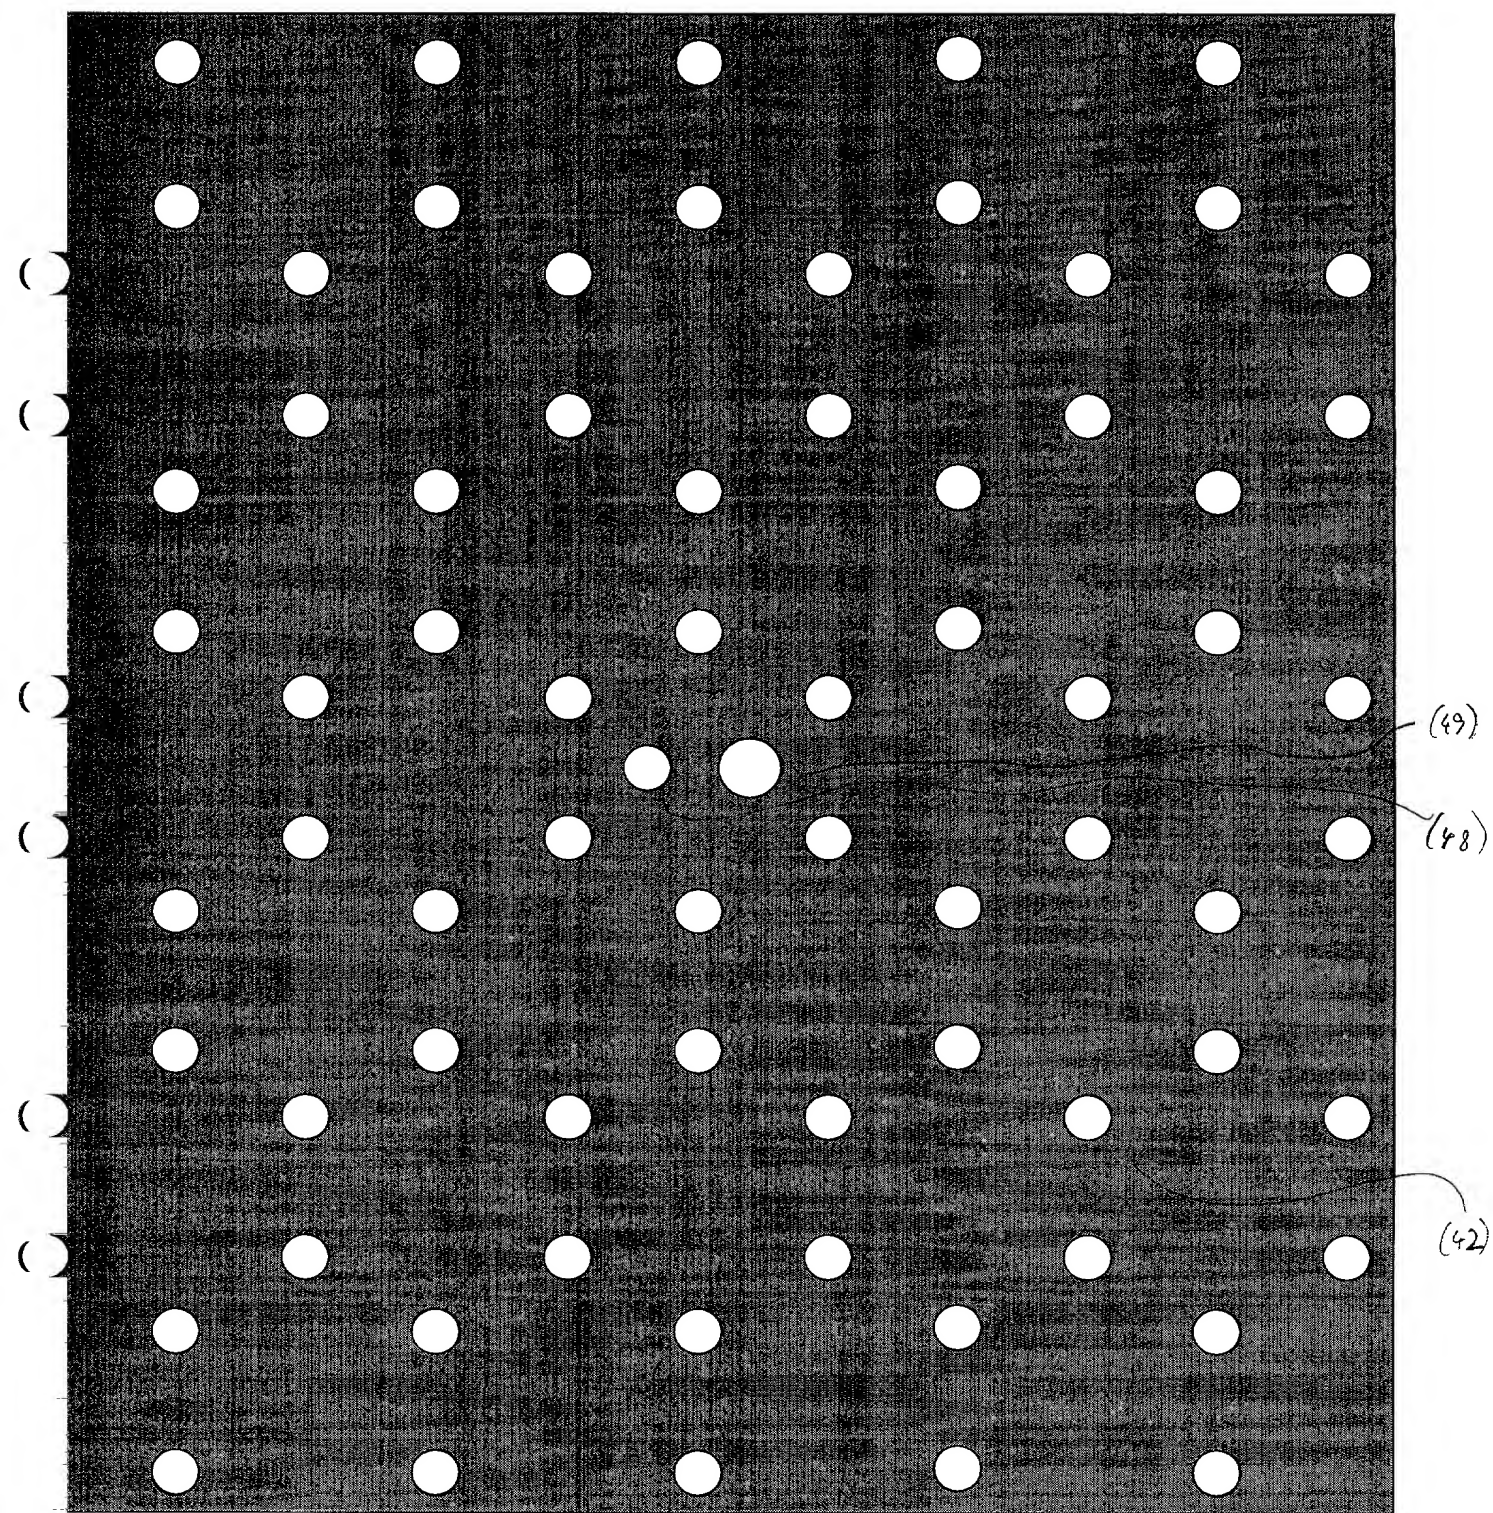


FIG. 41

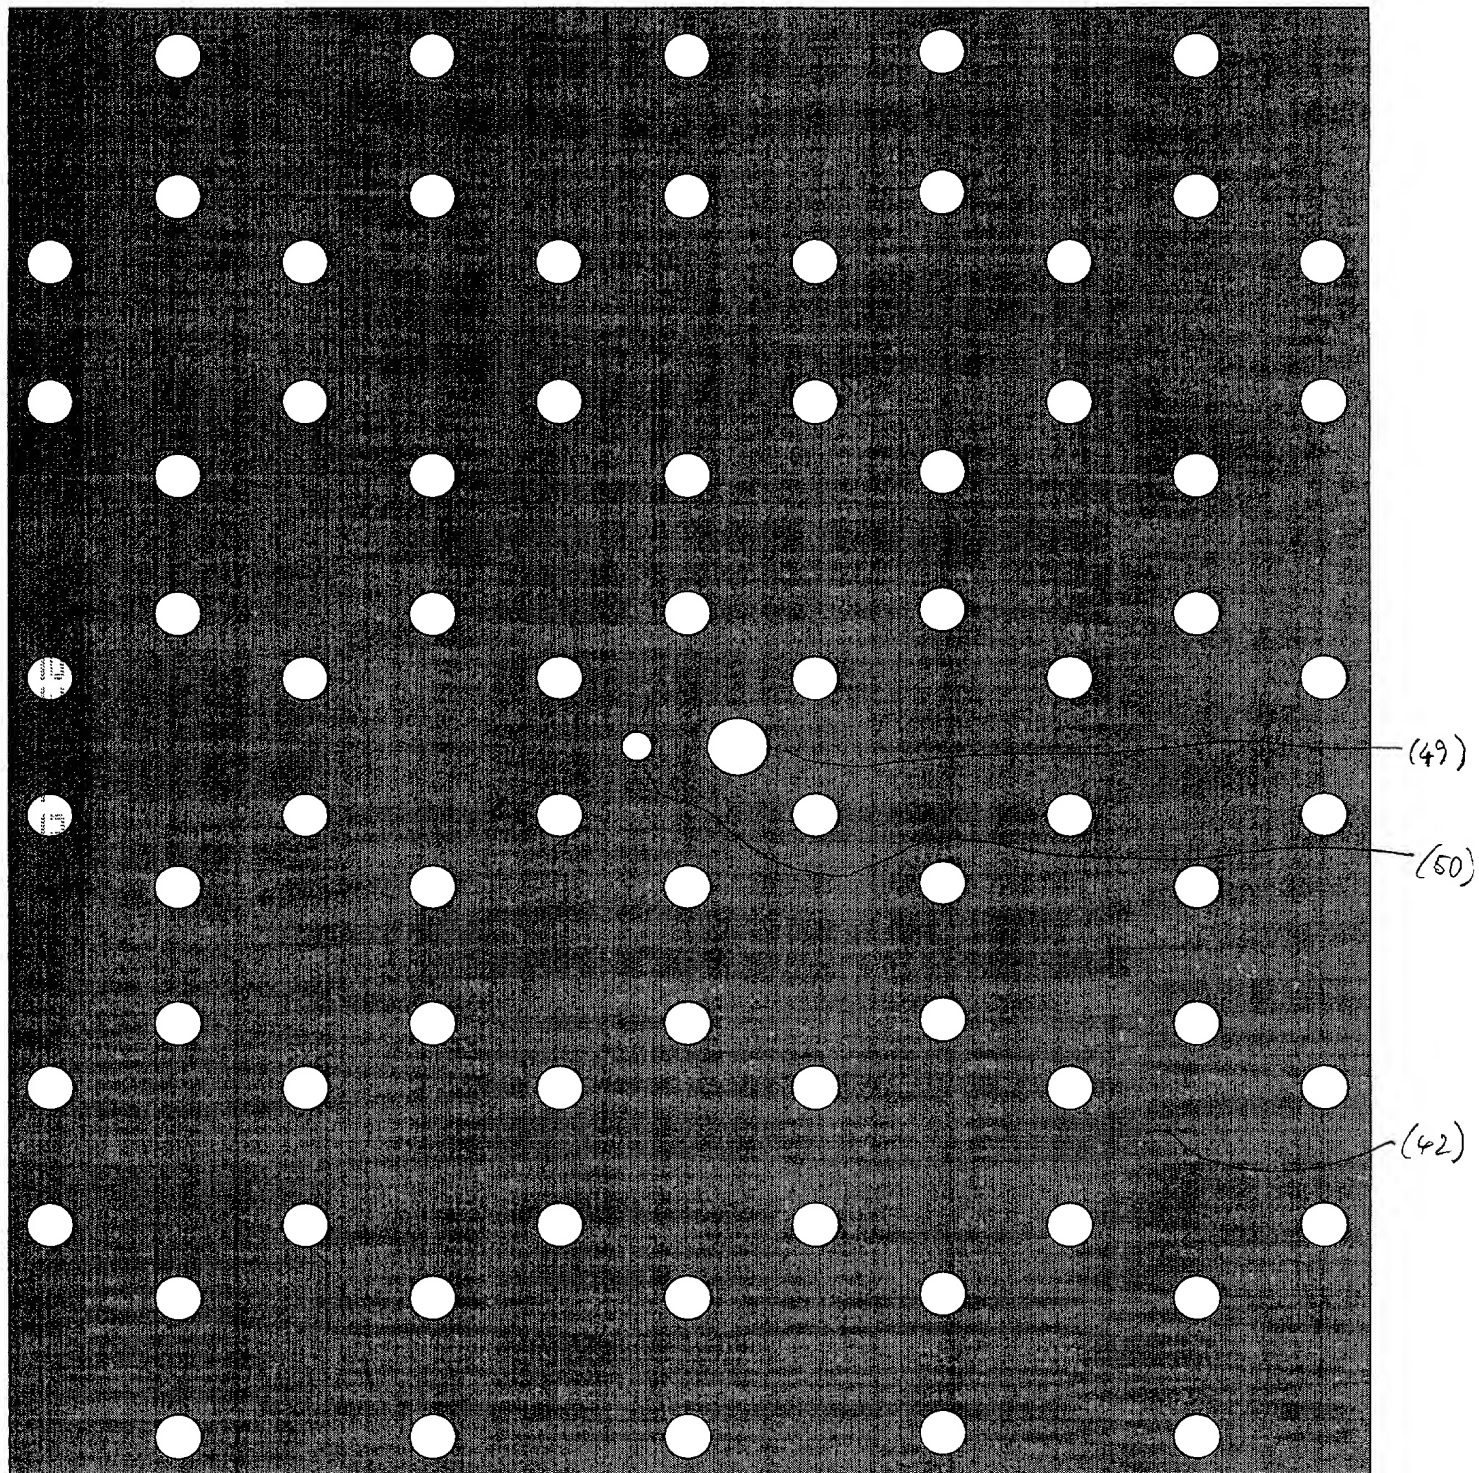


FIG. 42

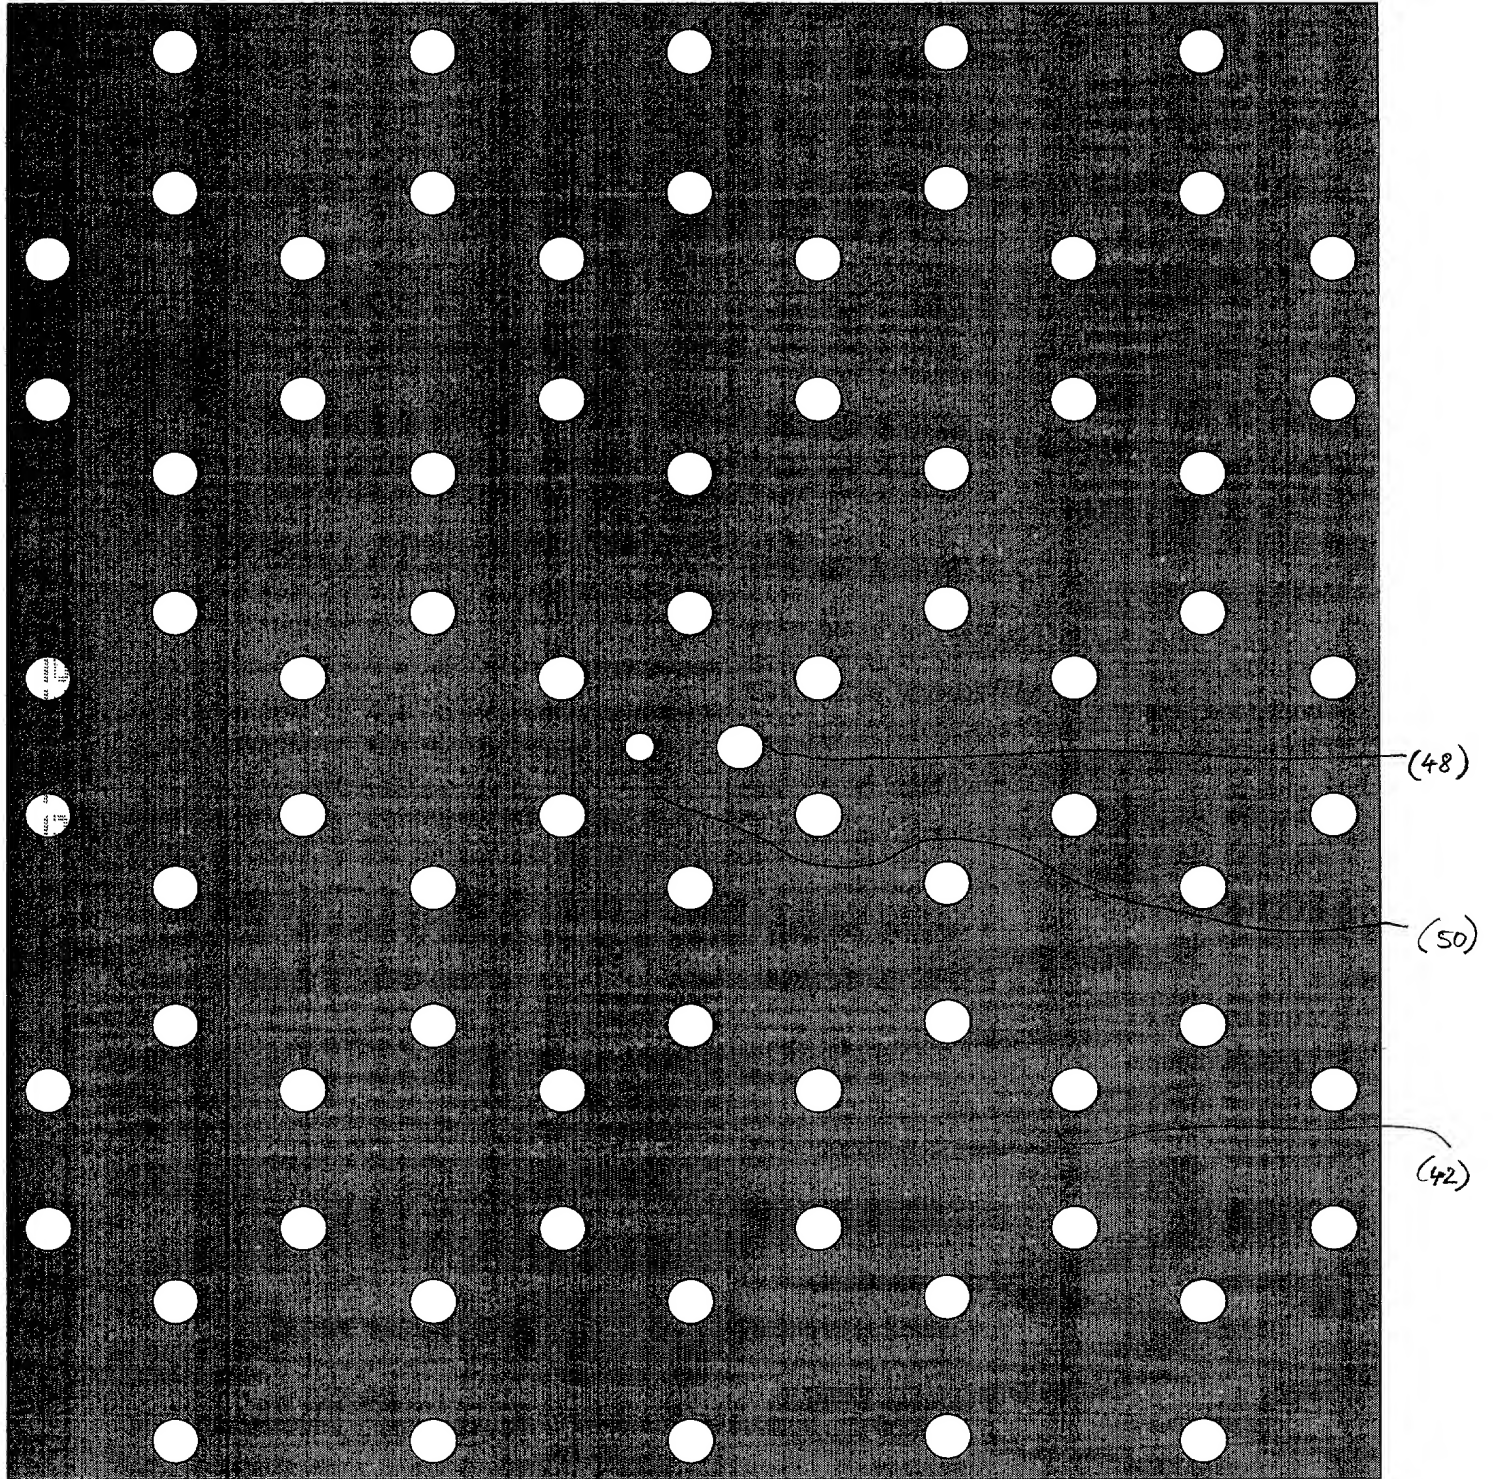


FIG. 43

FIG. 44

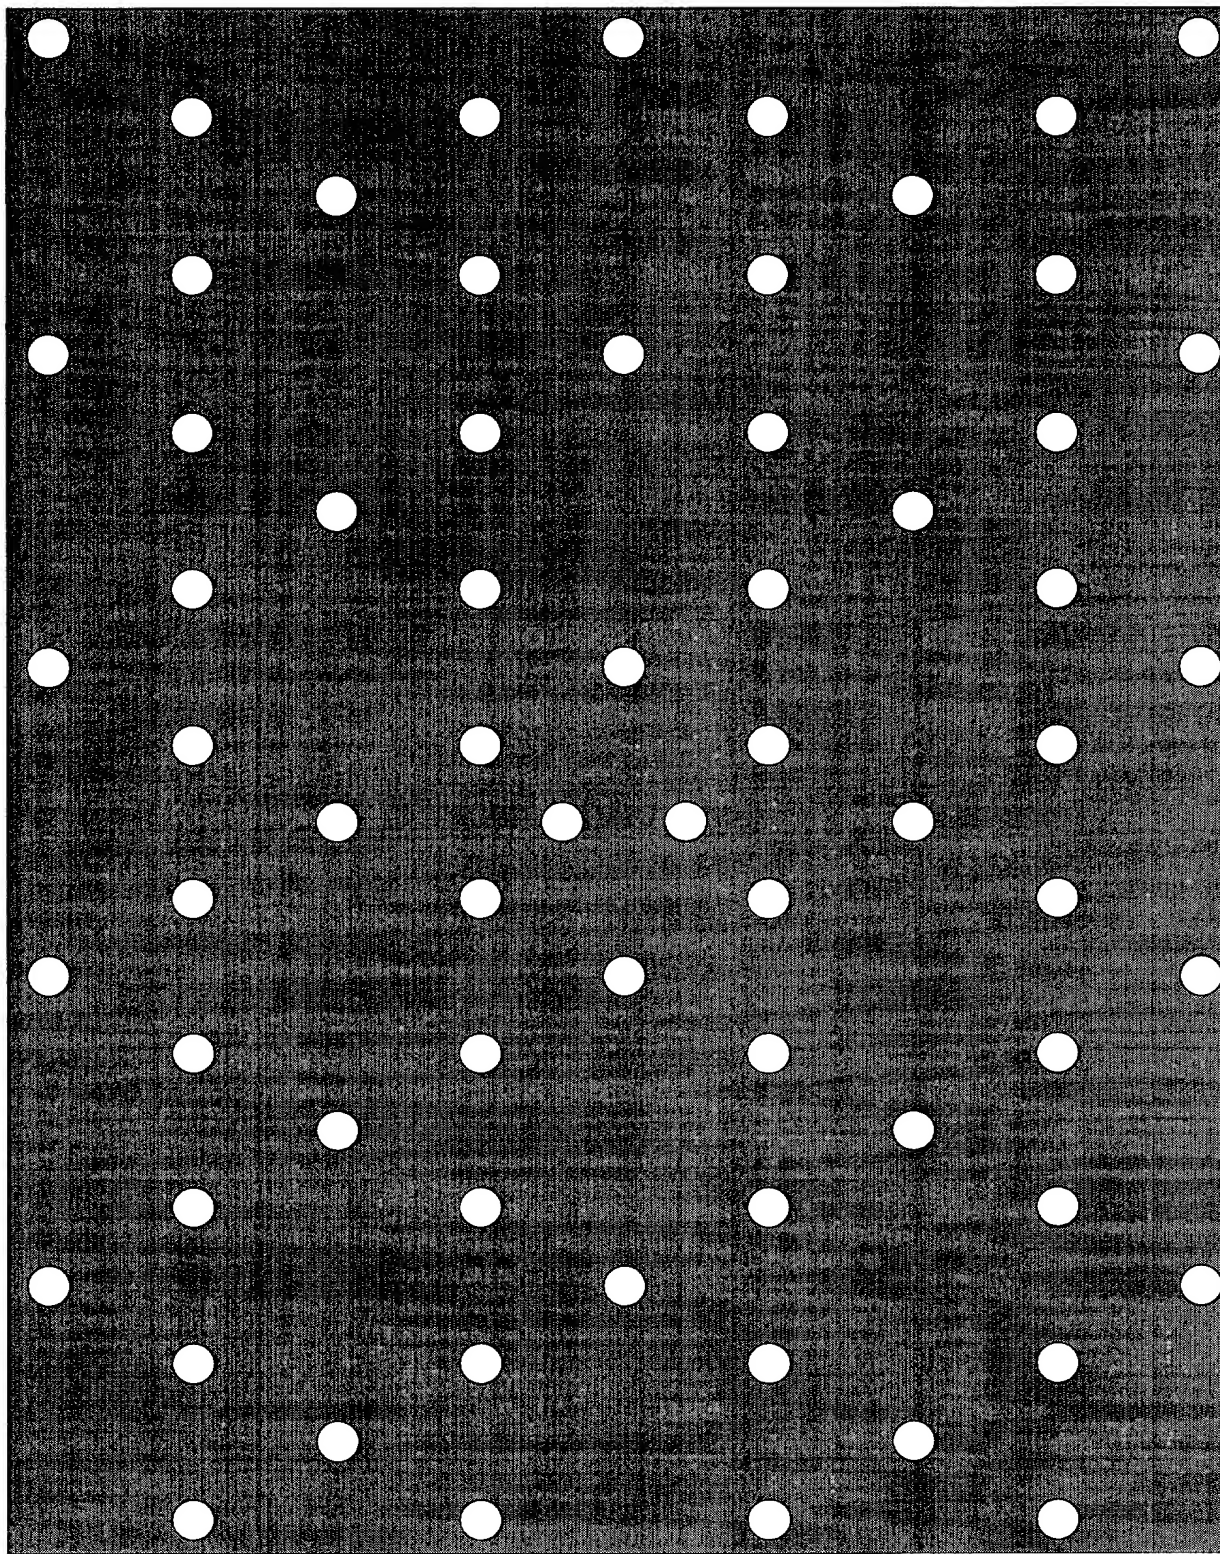


FIG. 44

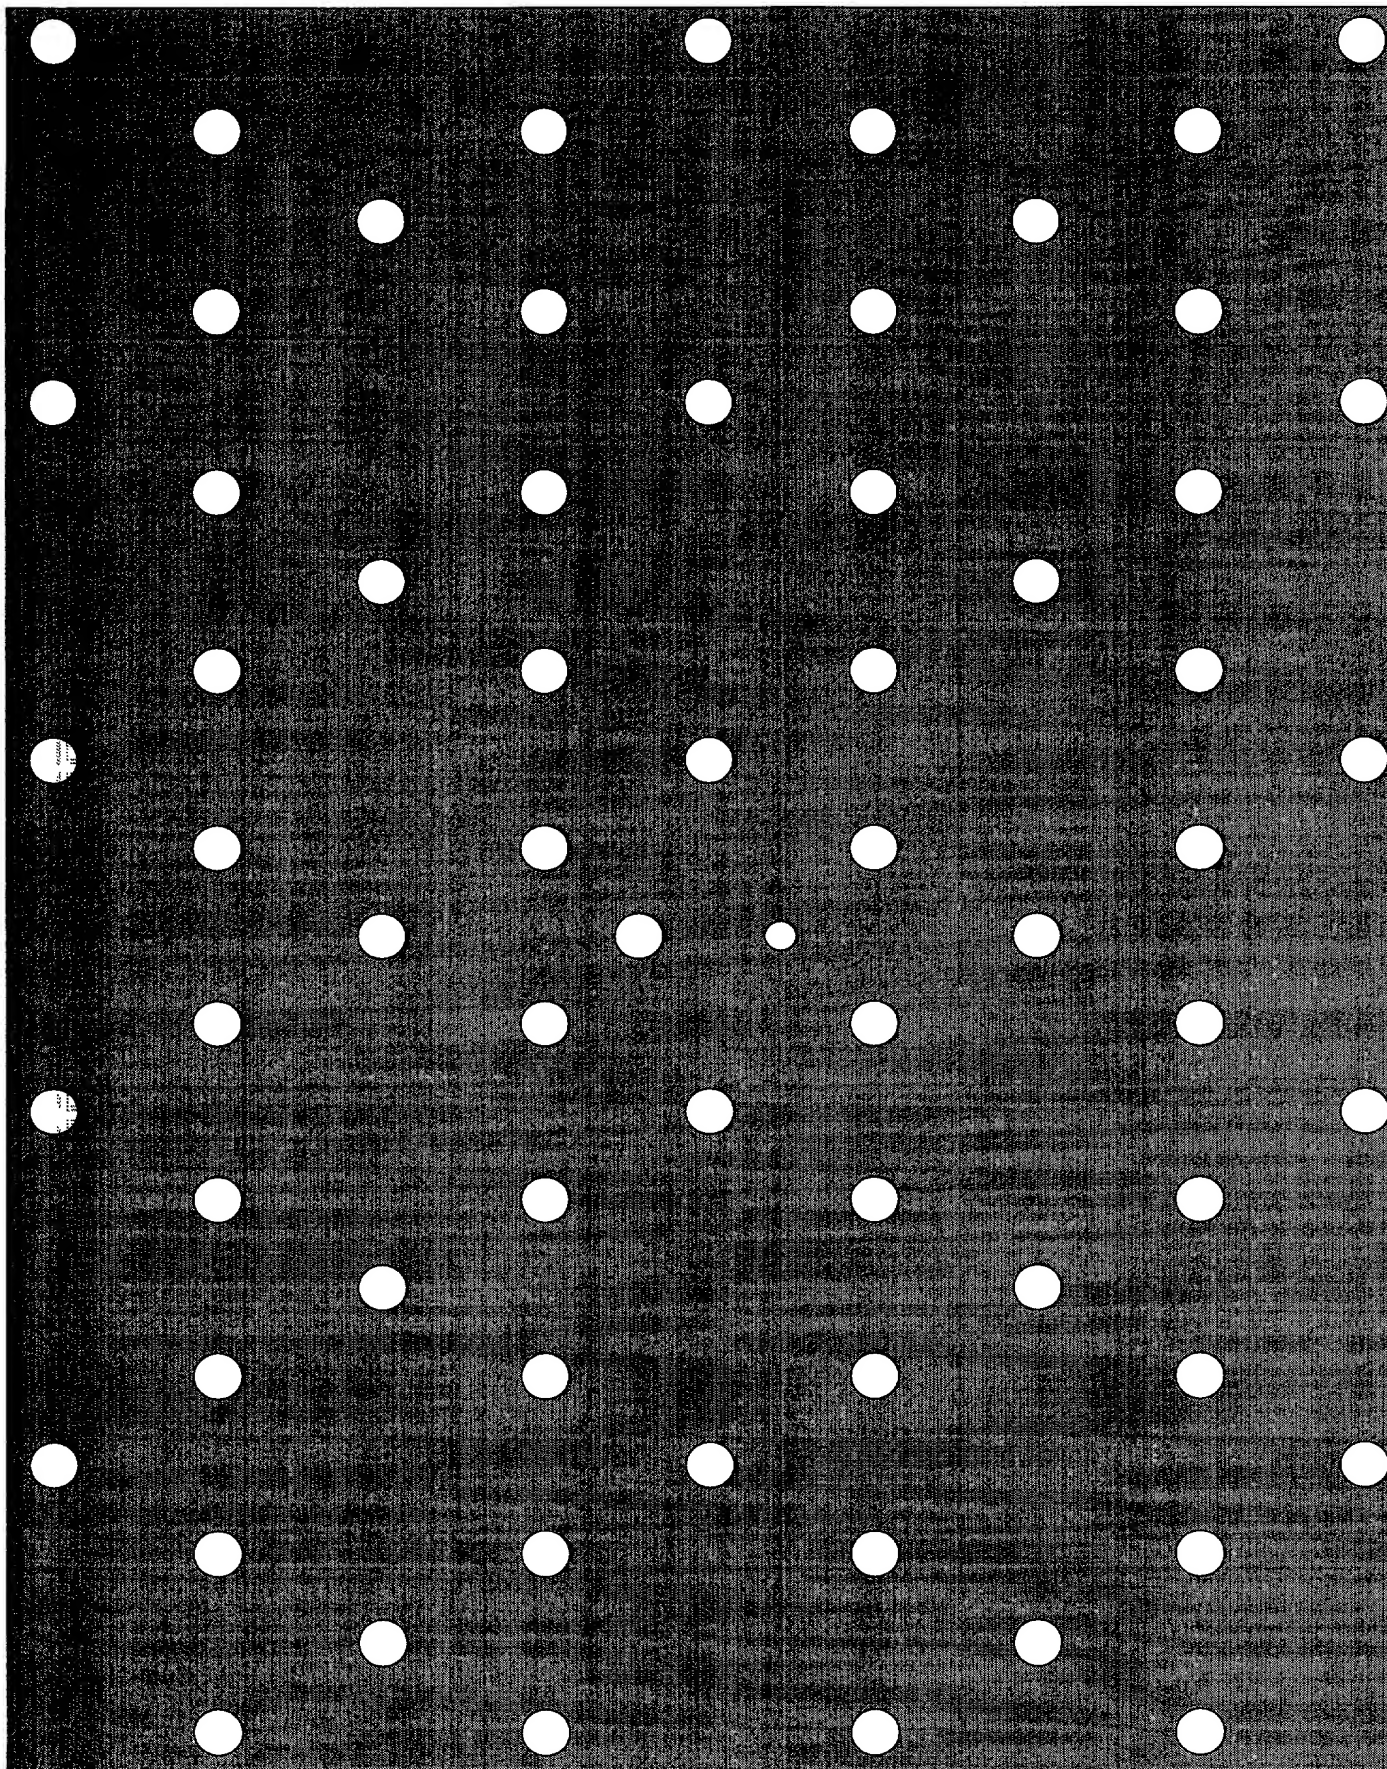


FIG. 45

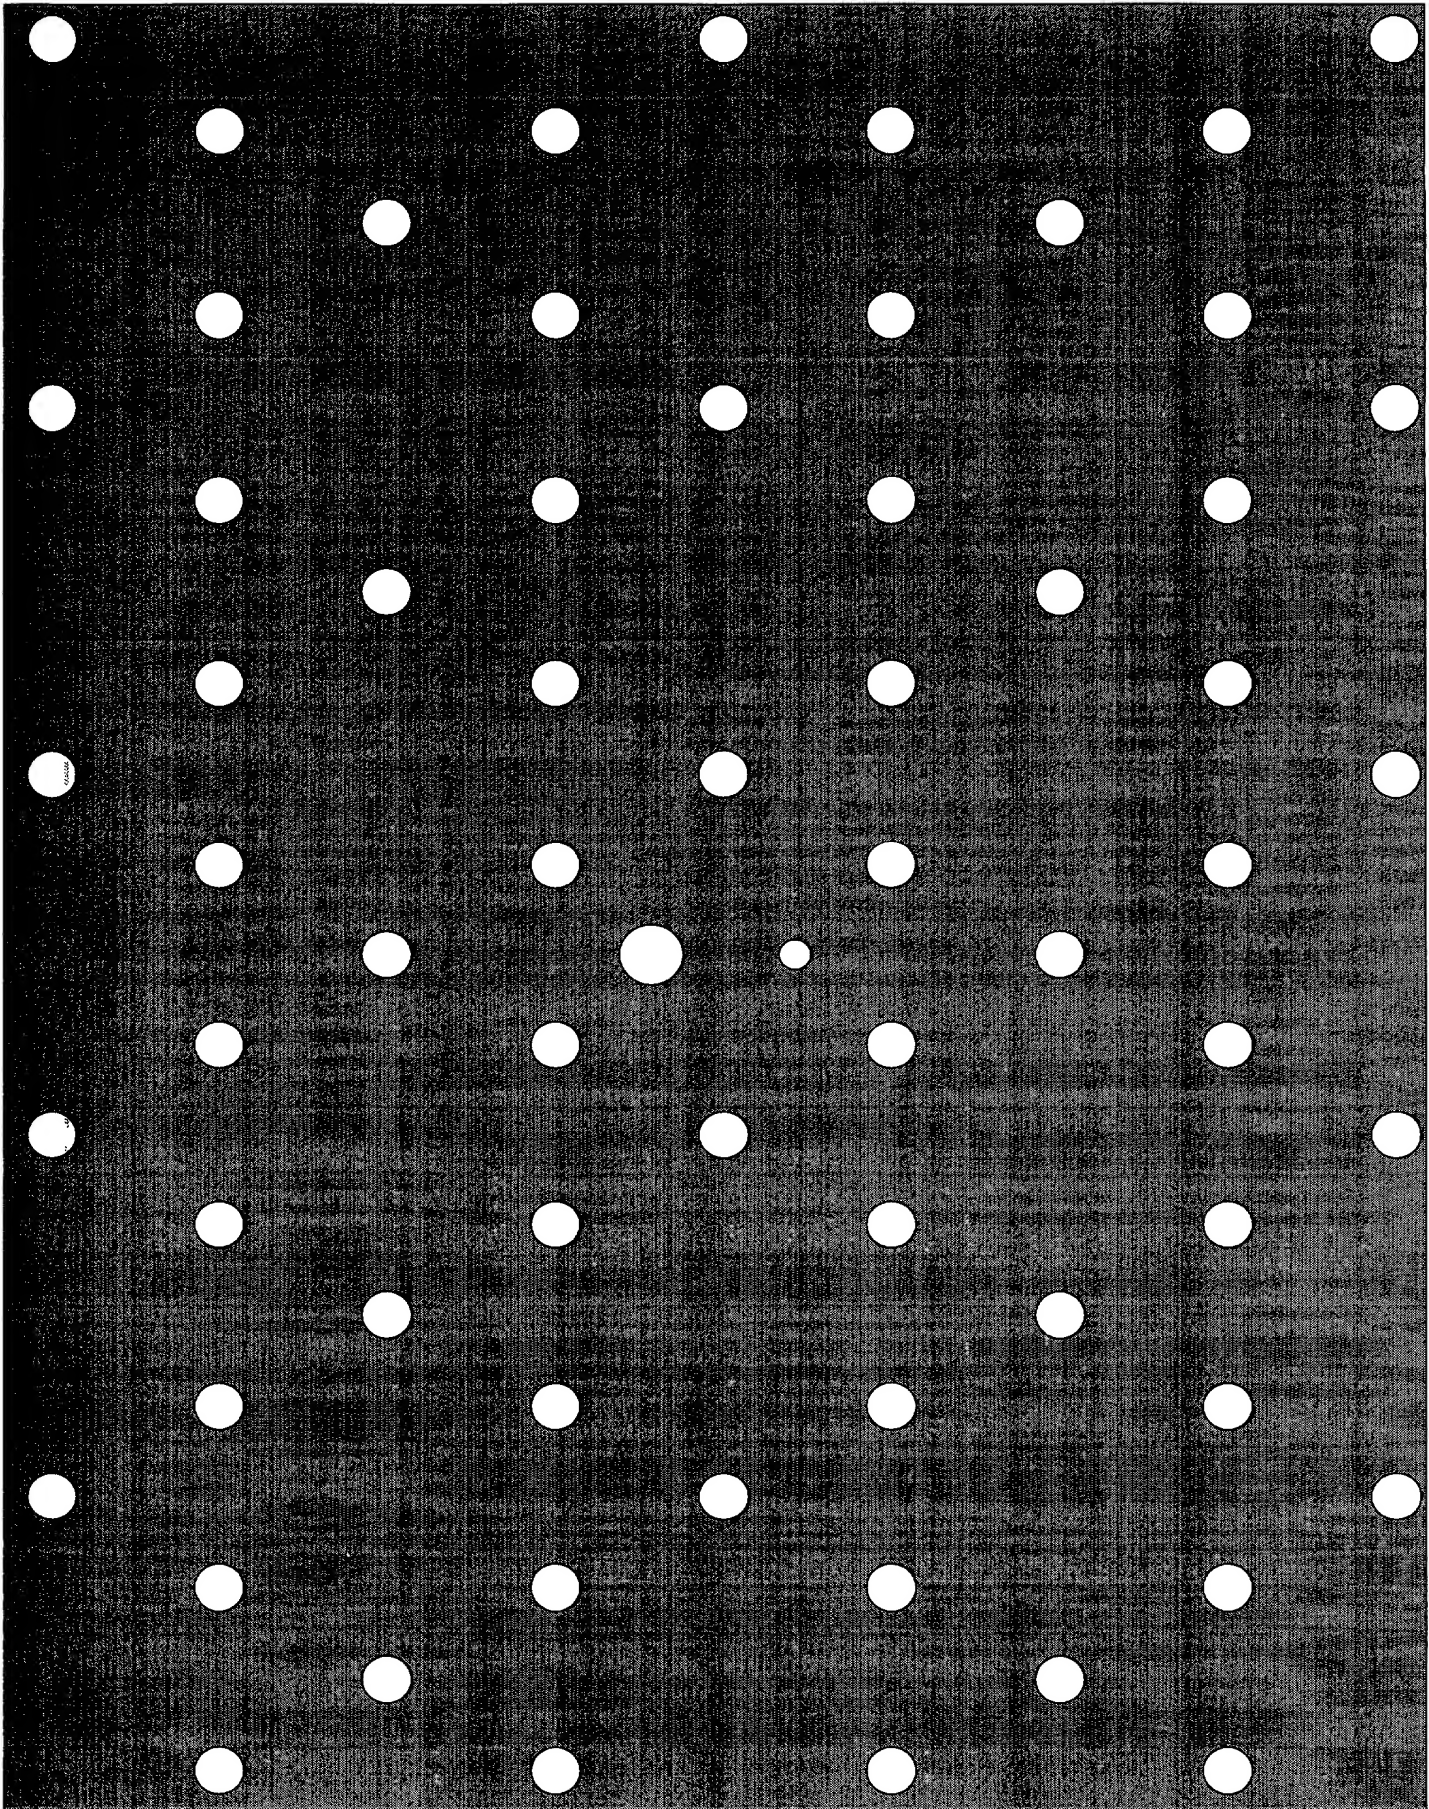


FIG. 46

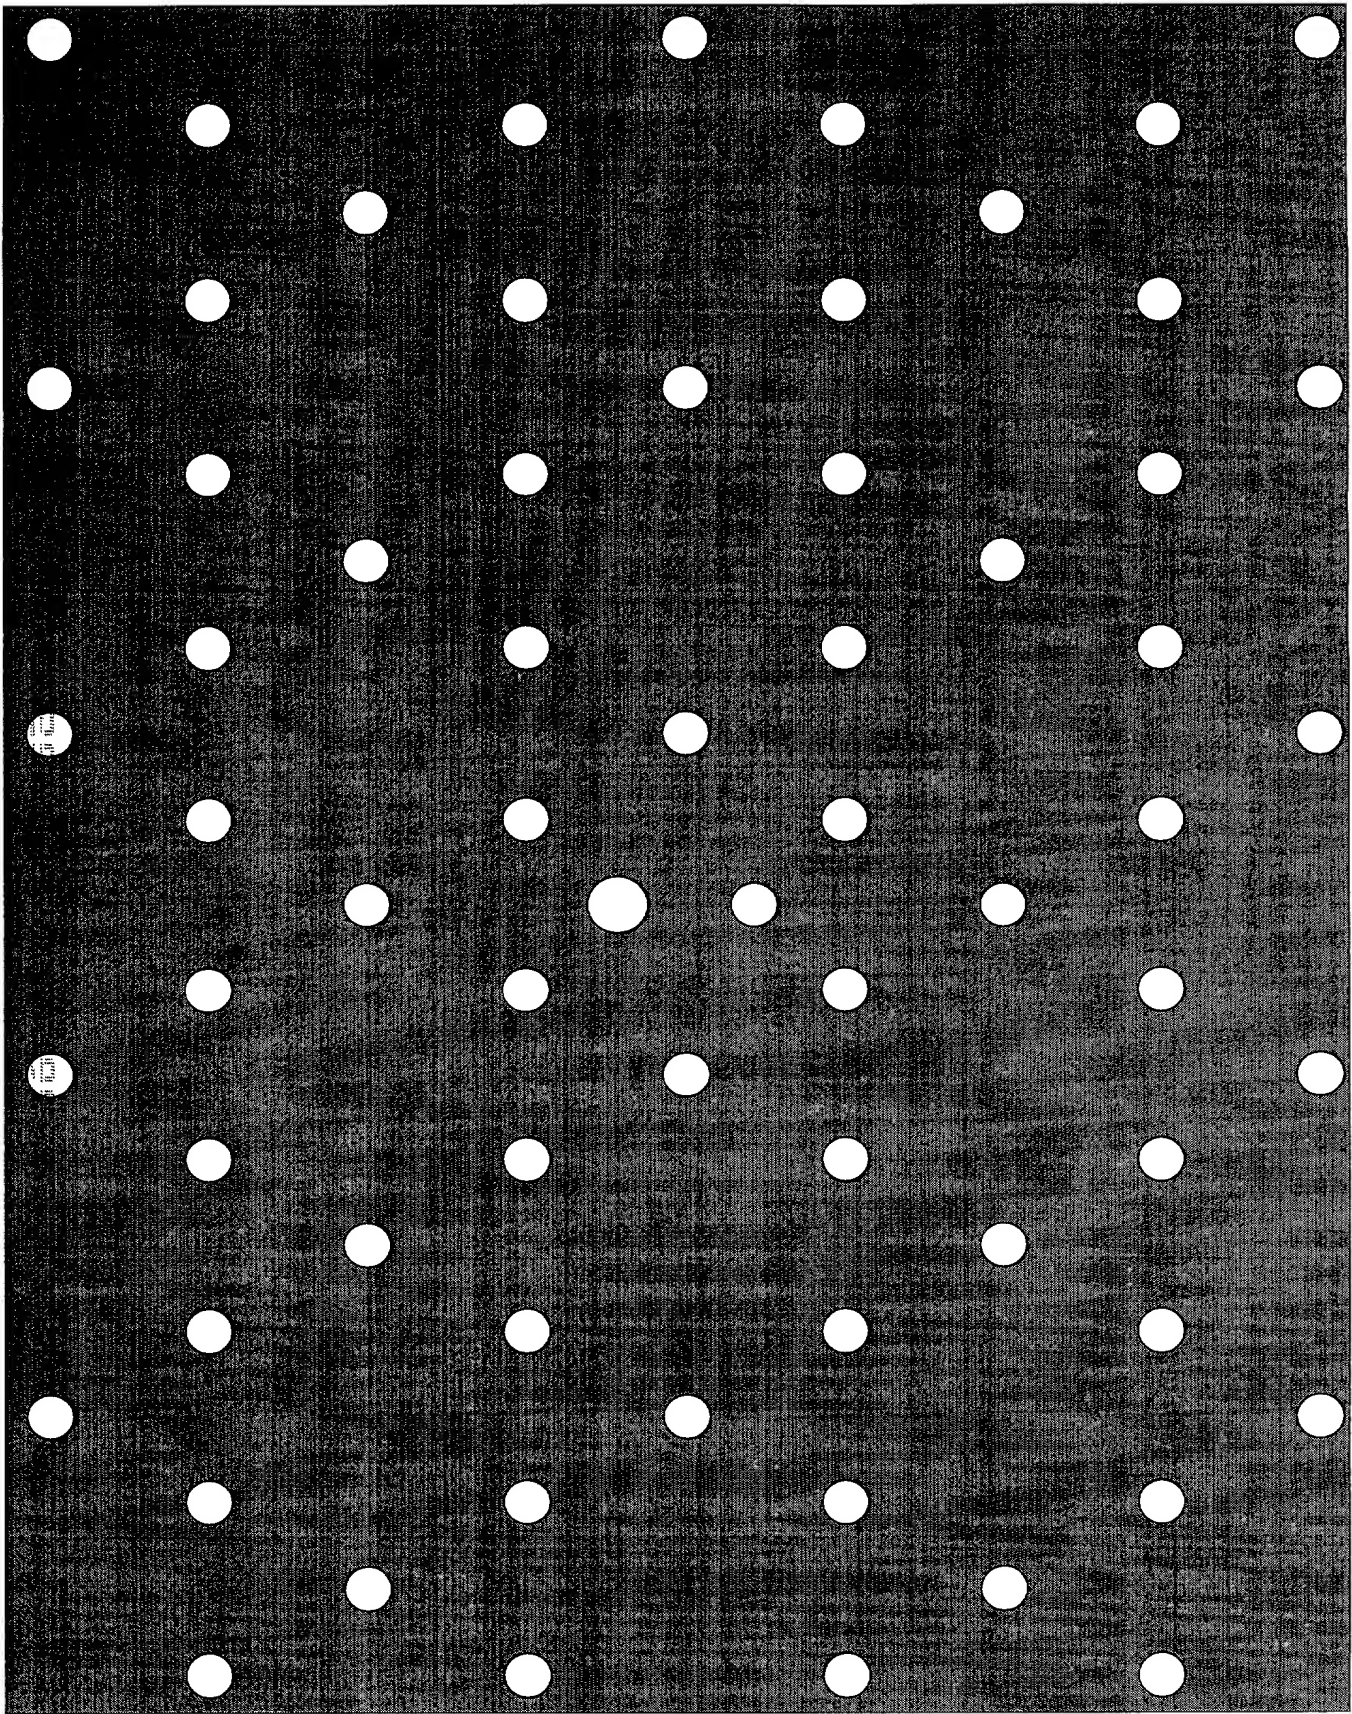


FIG. 42

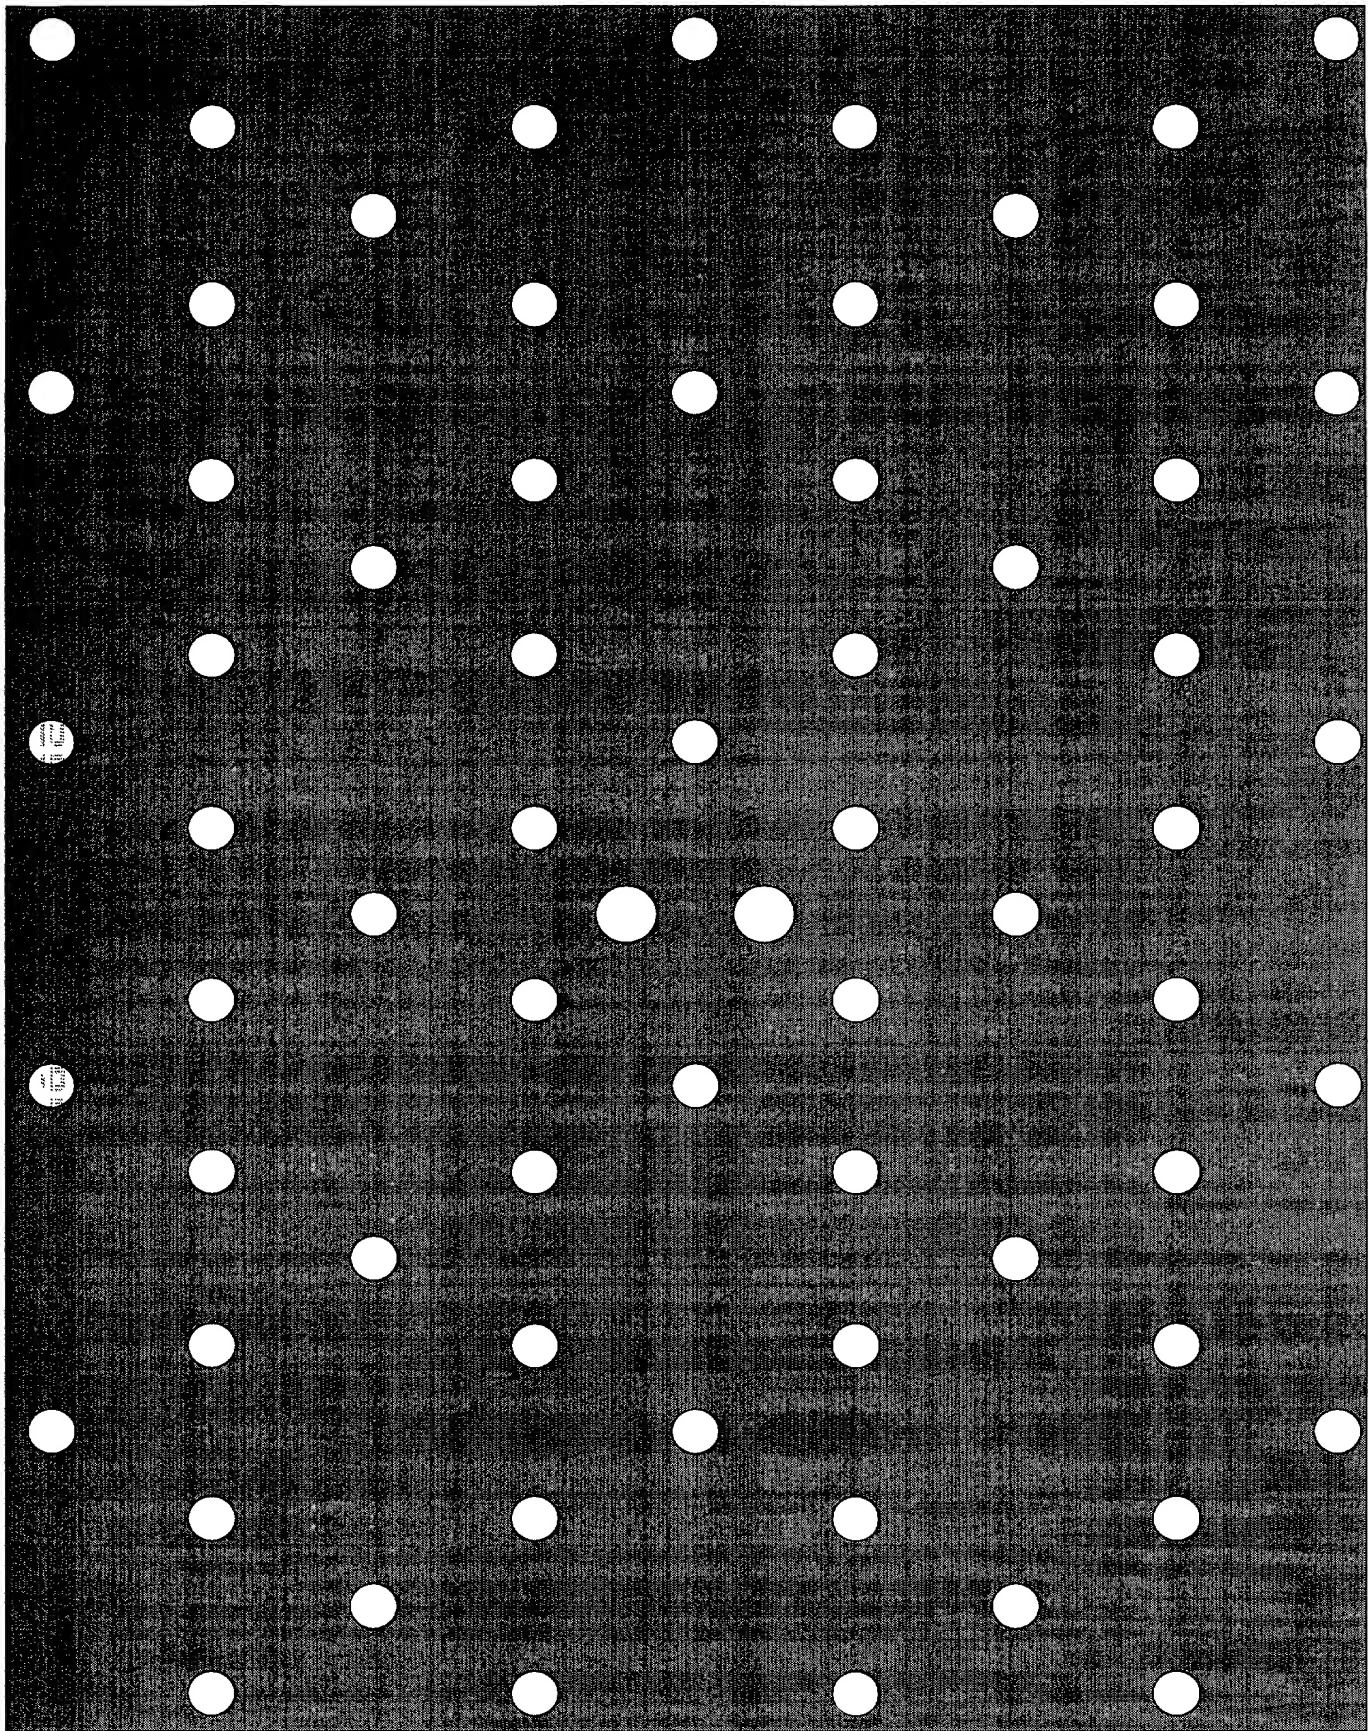


FIG. 48

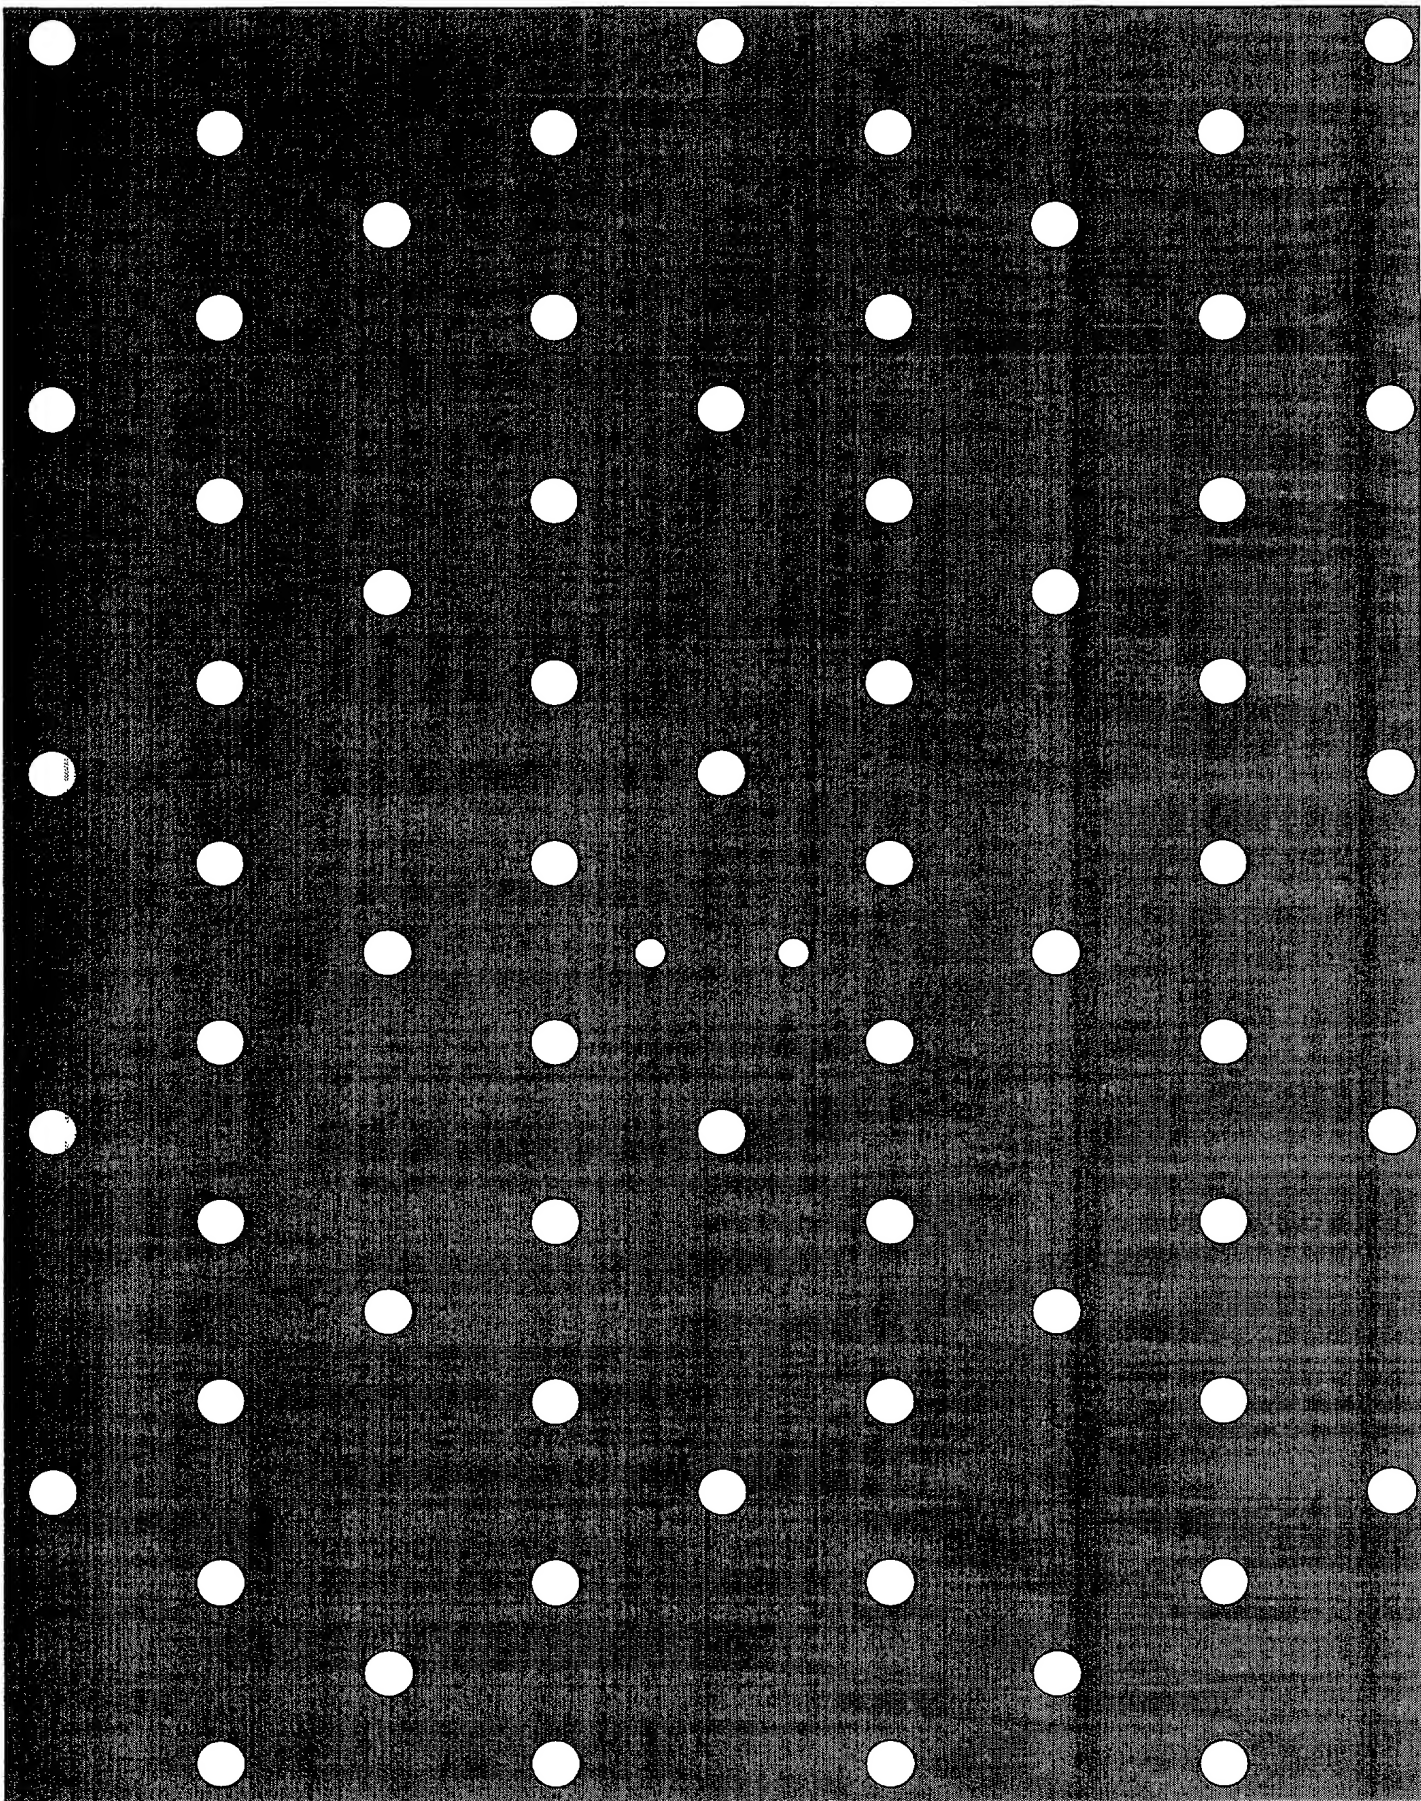


FIG. 49

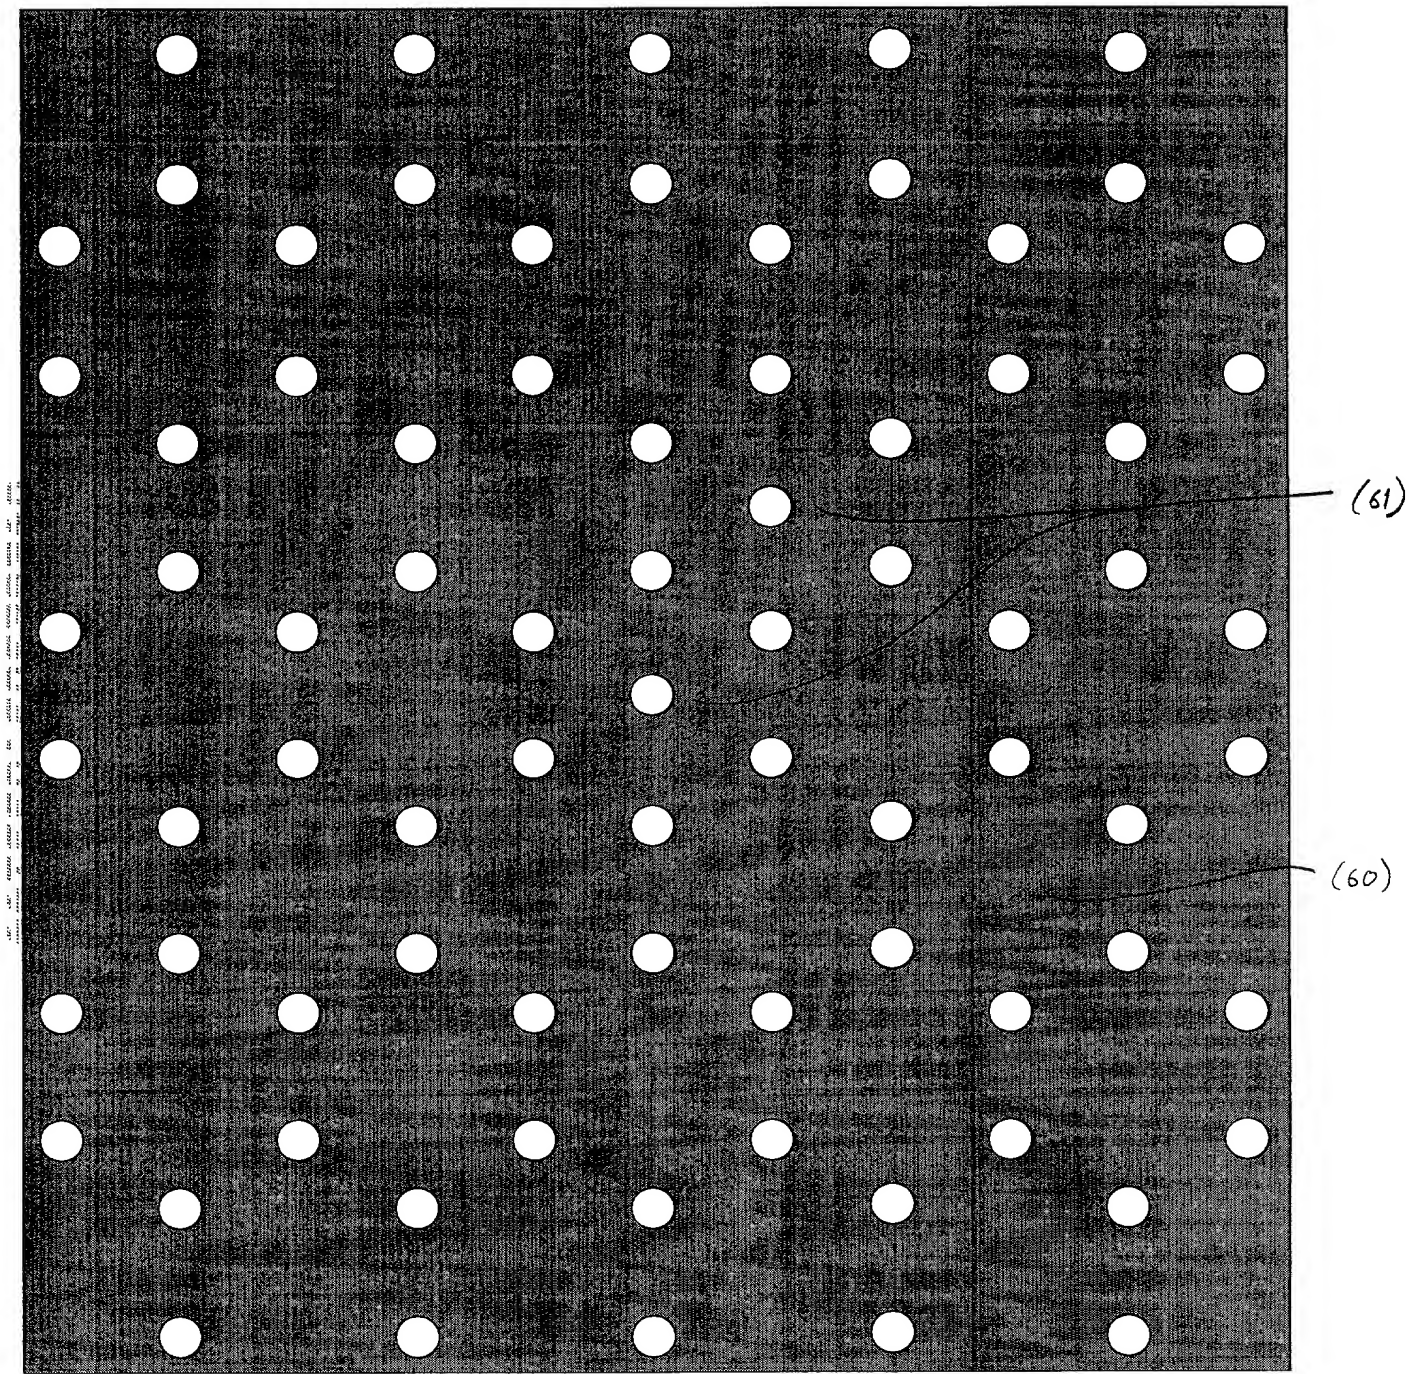


FIG. 50

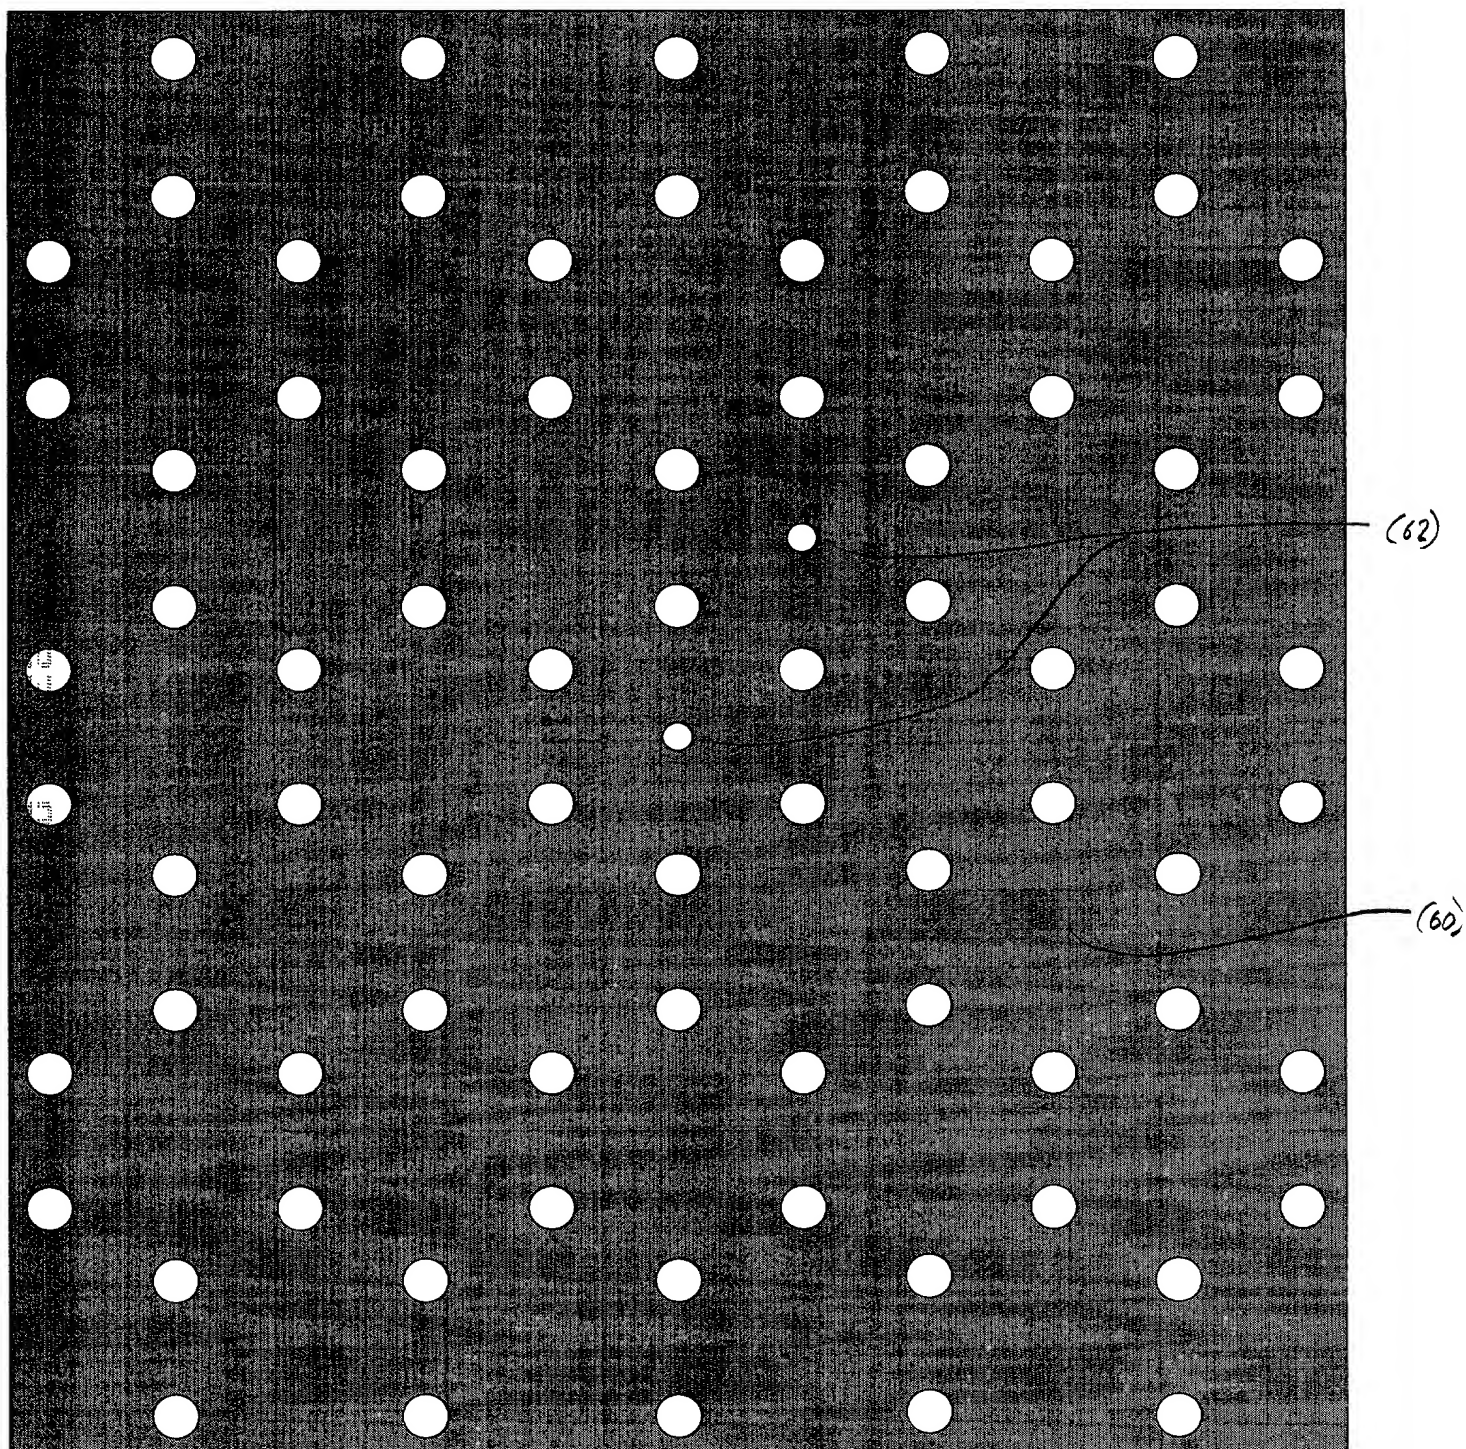


FIG. 51

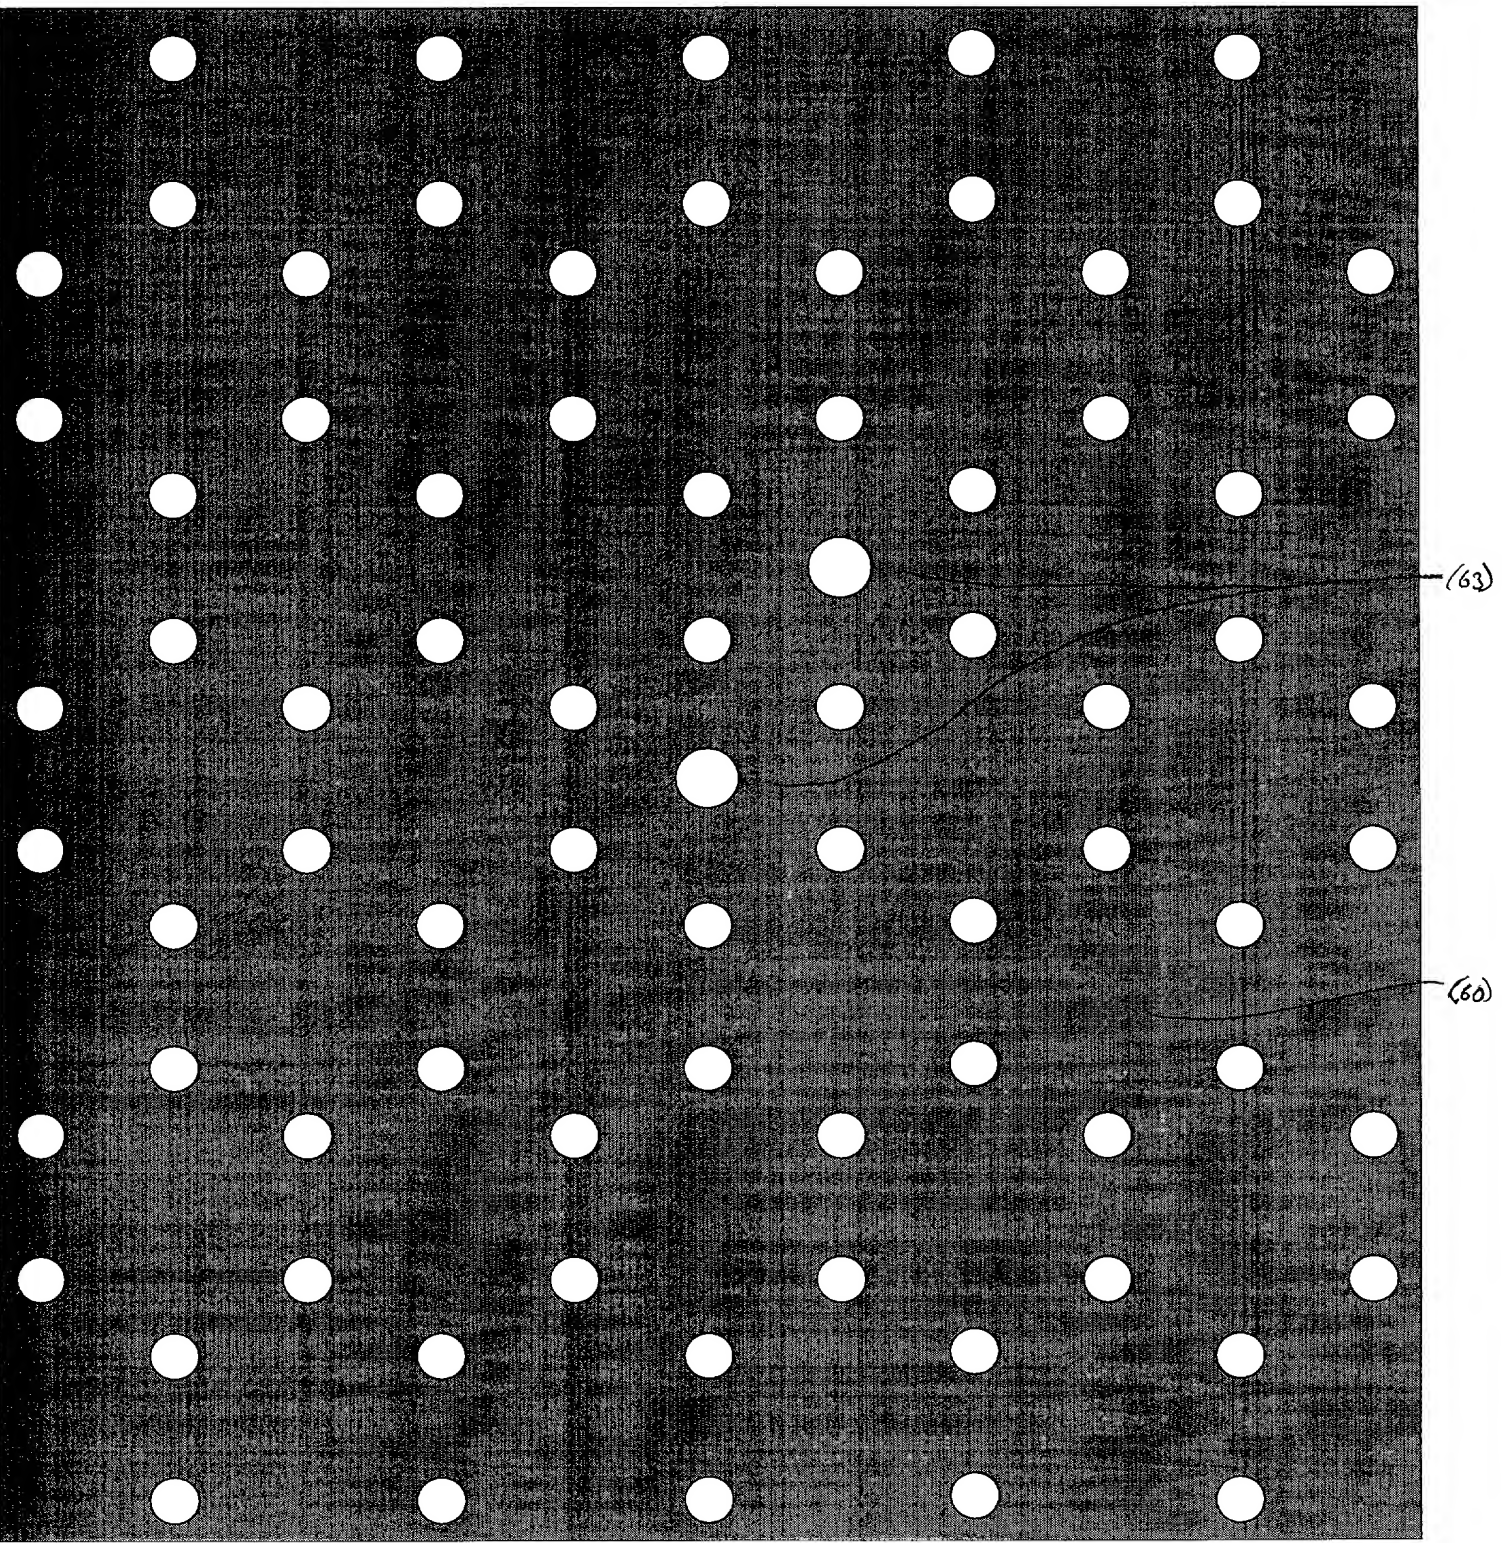


FIG. 52

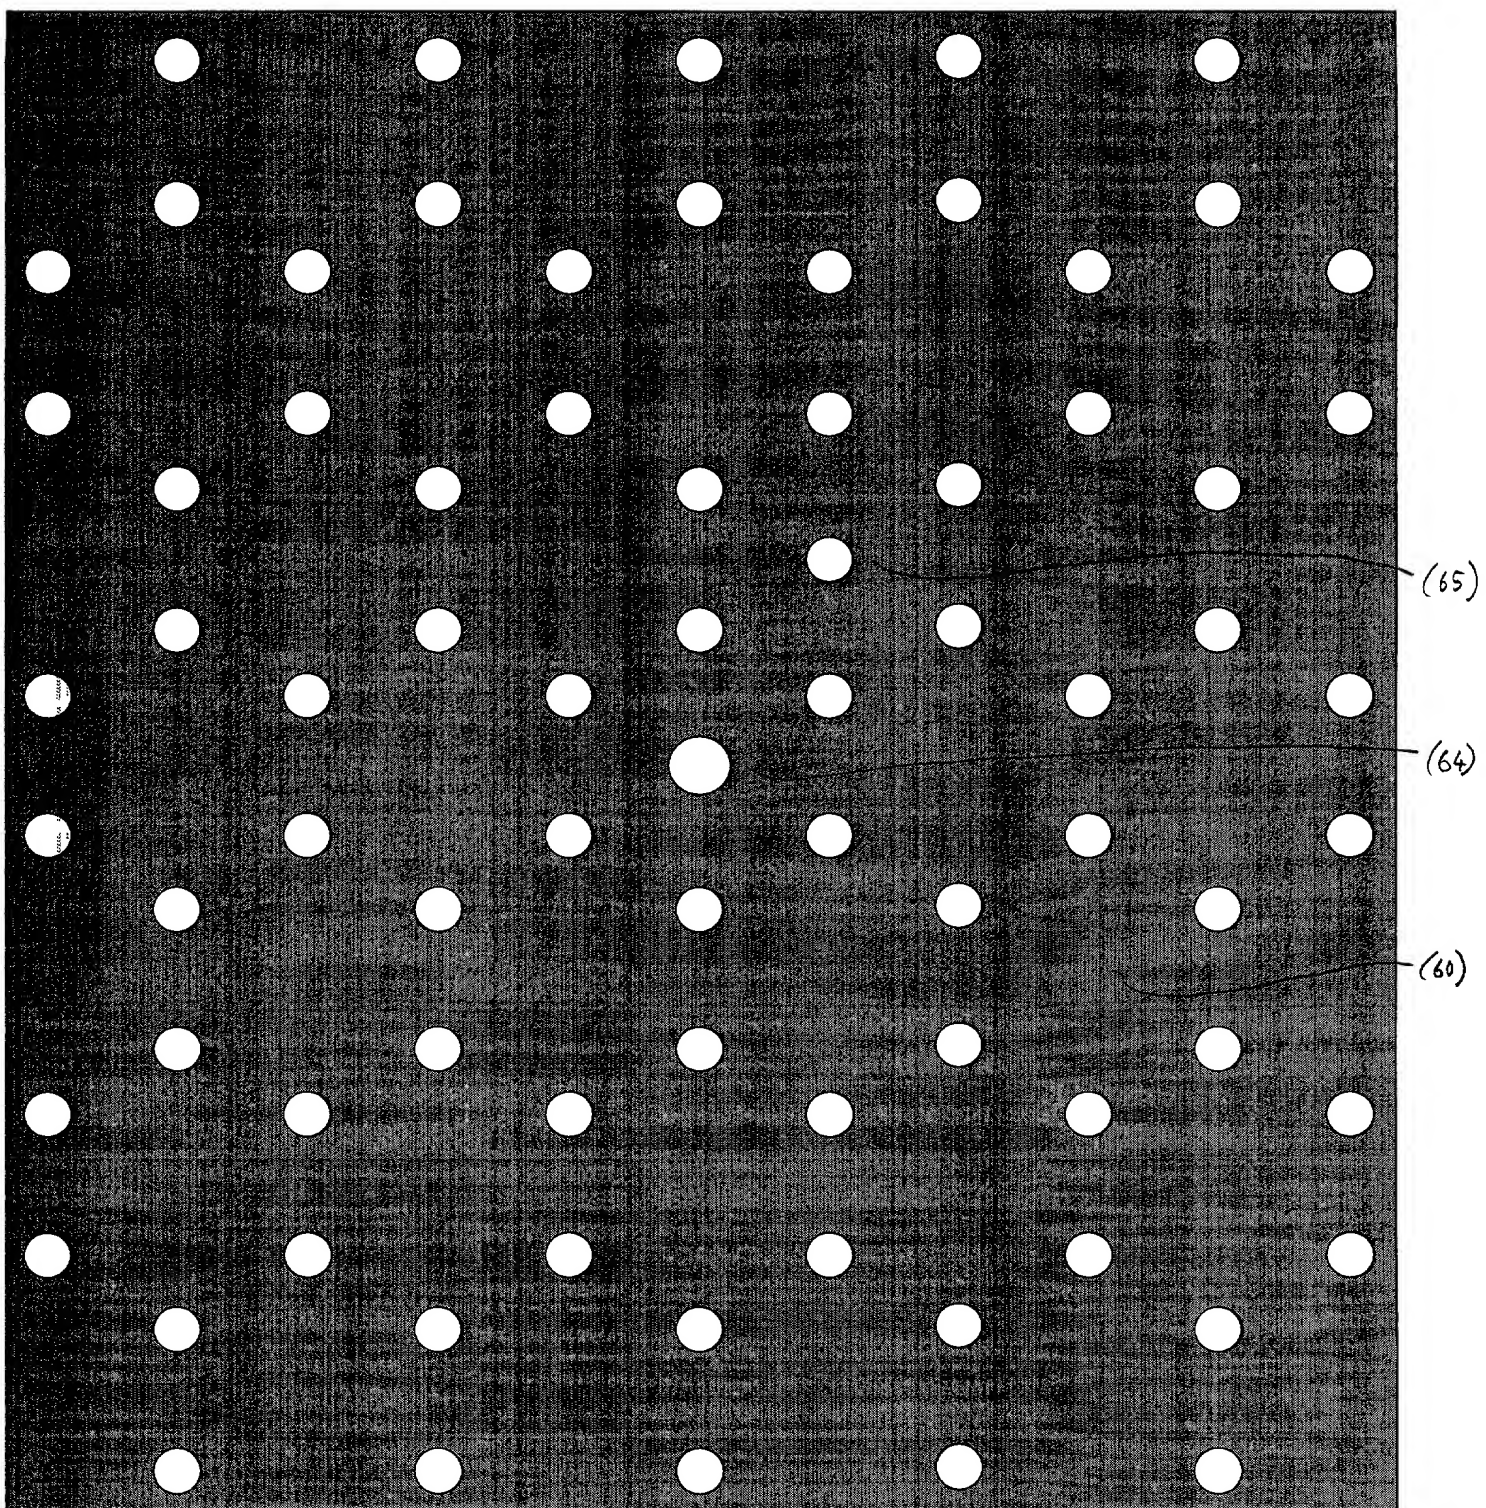


FIG. 53

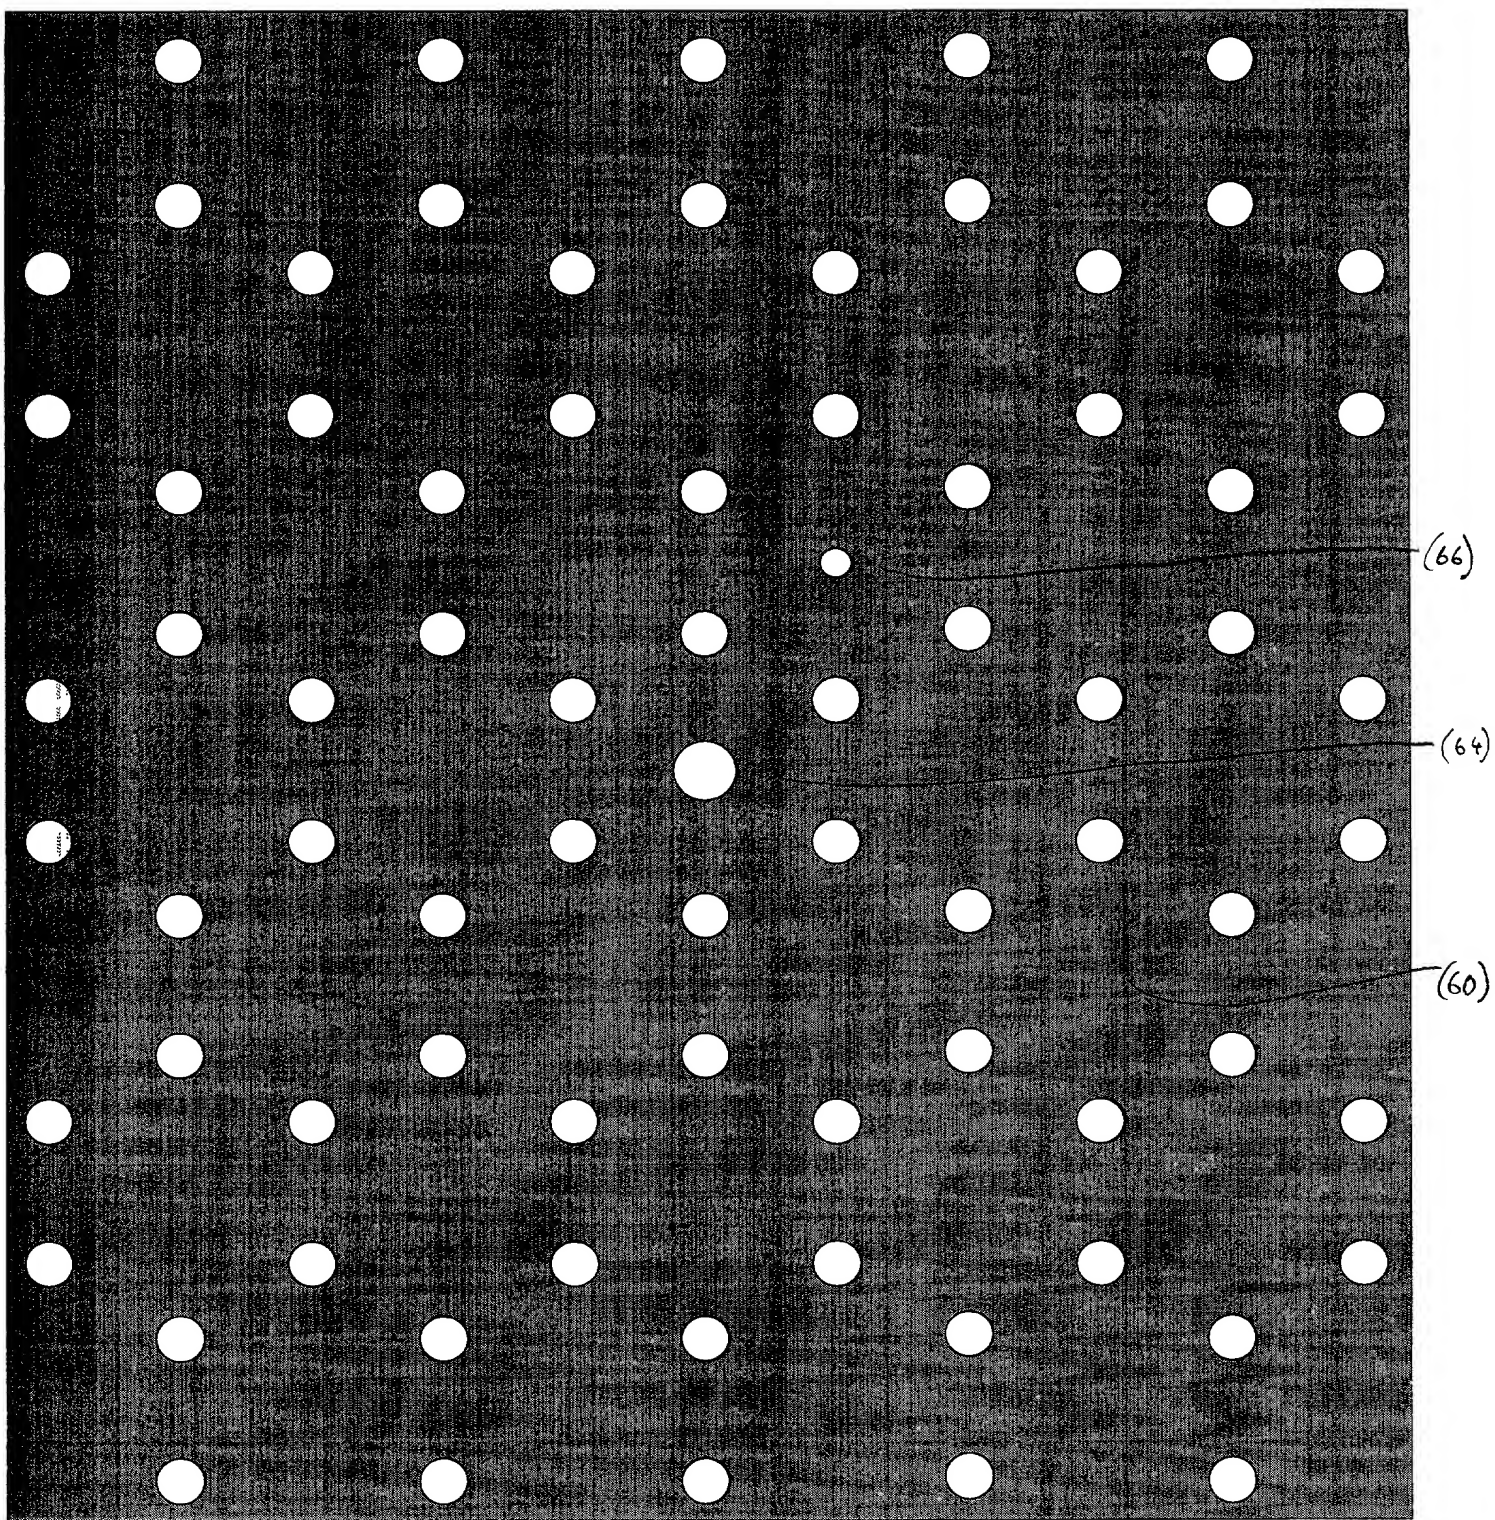


FIG. 54


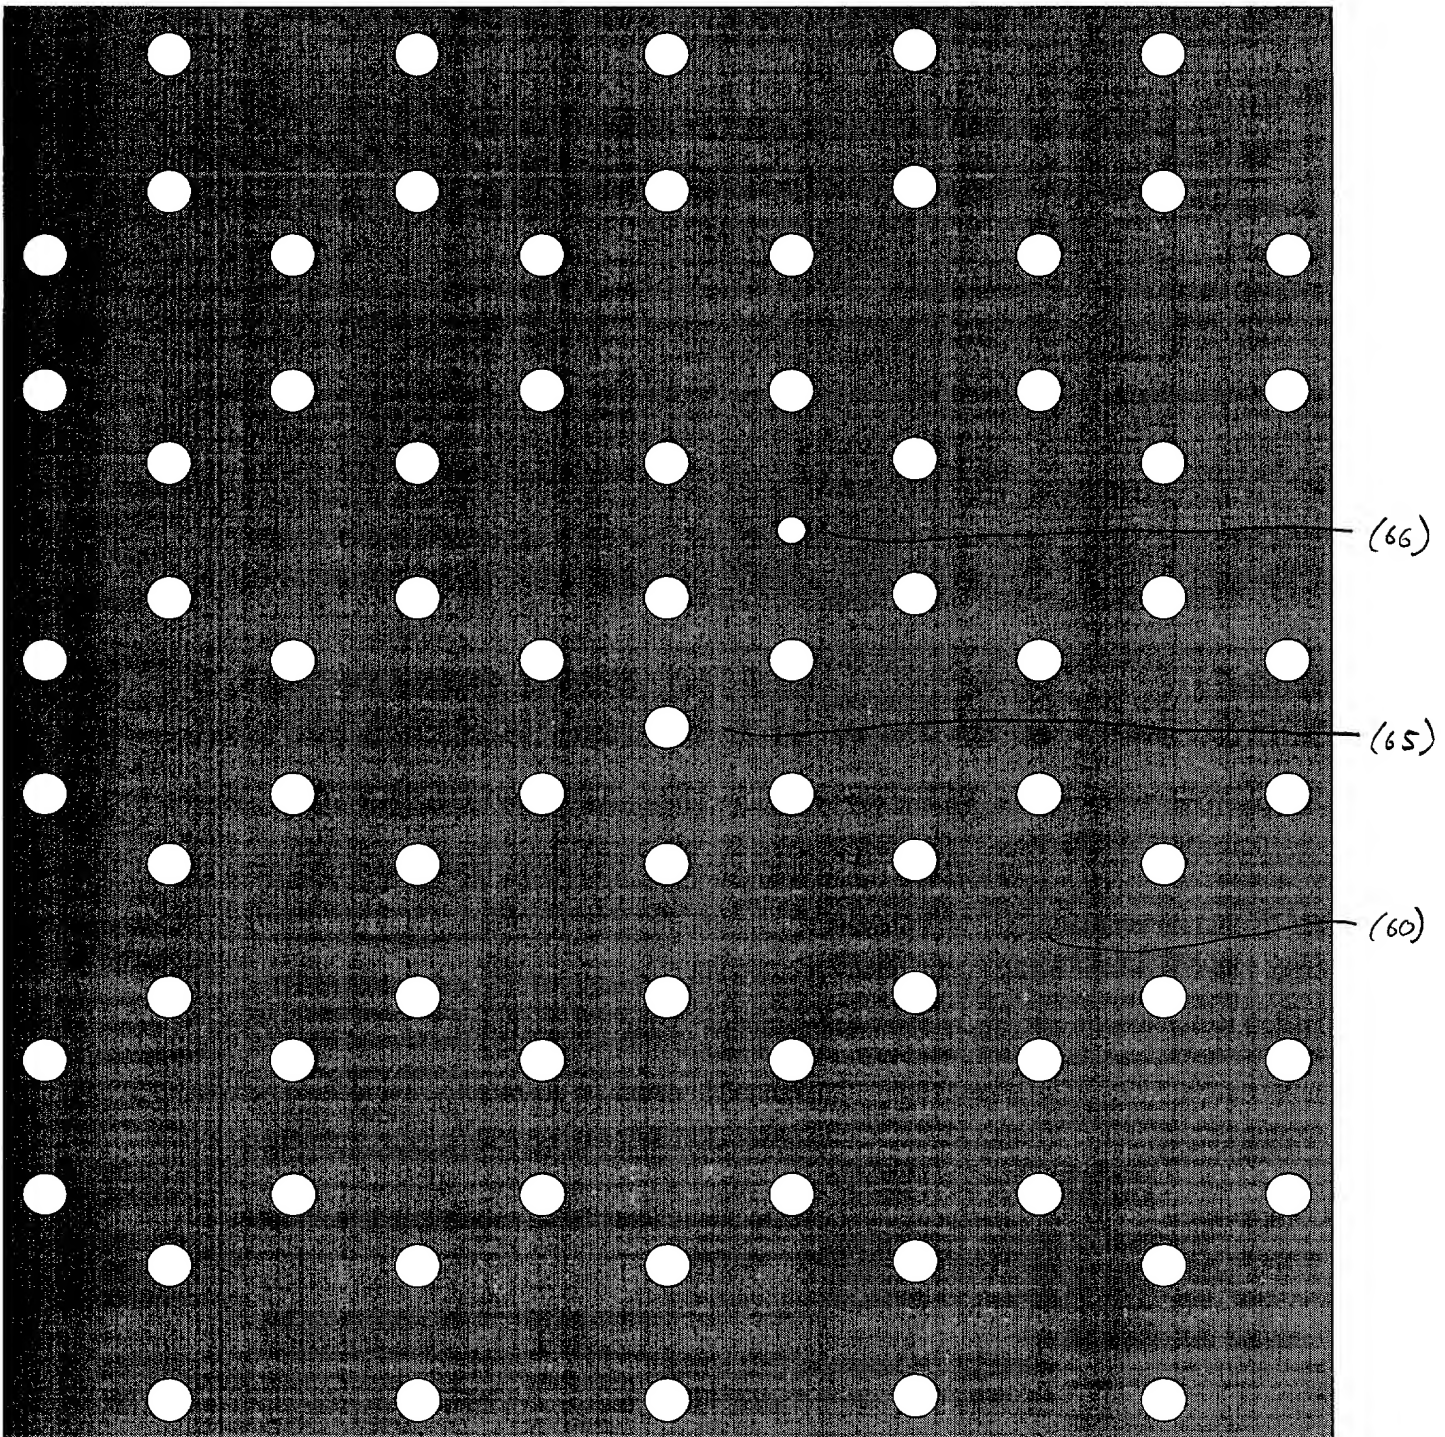


FIG. 55

FIG. 56 is a perspective view of a sheet of material having a grid of holes. The sheet is shown in a perspective view, and the grid of holes is formed by a series of parallel lines intersecting to form a grid of rectangular openings. The sheet is shown in a perspective view, and the grid of holes is formed by a series of parallel lines intersecting to form a grid of rectangular openings.

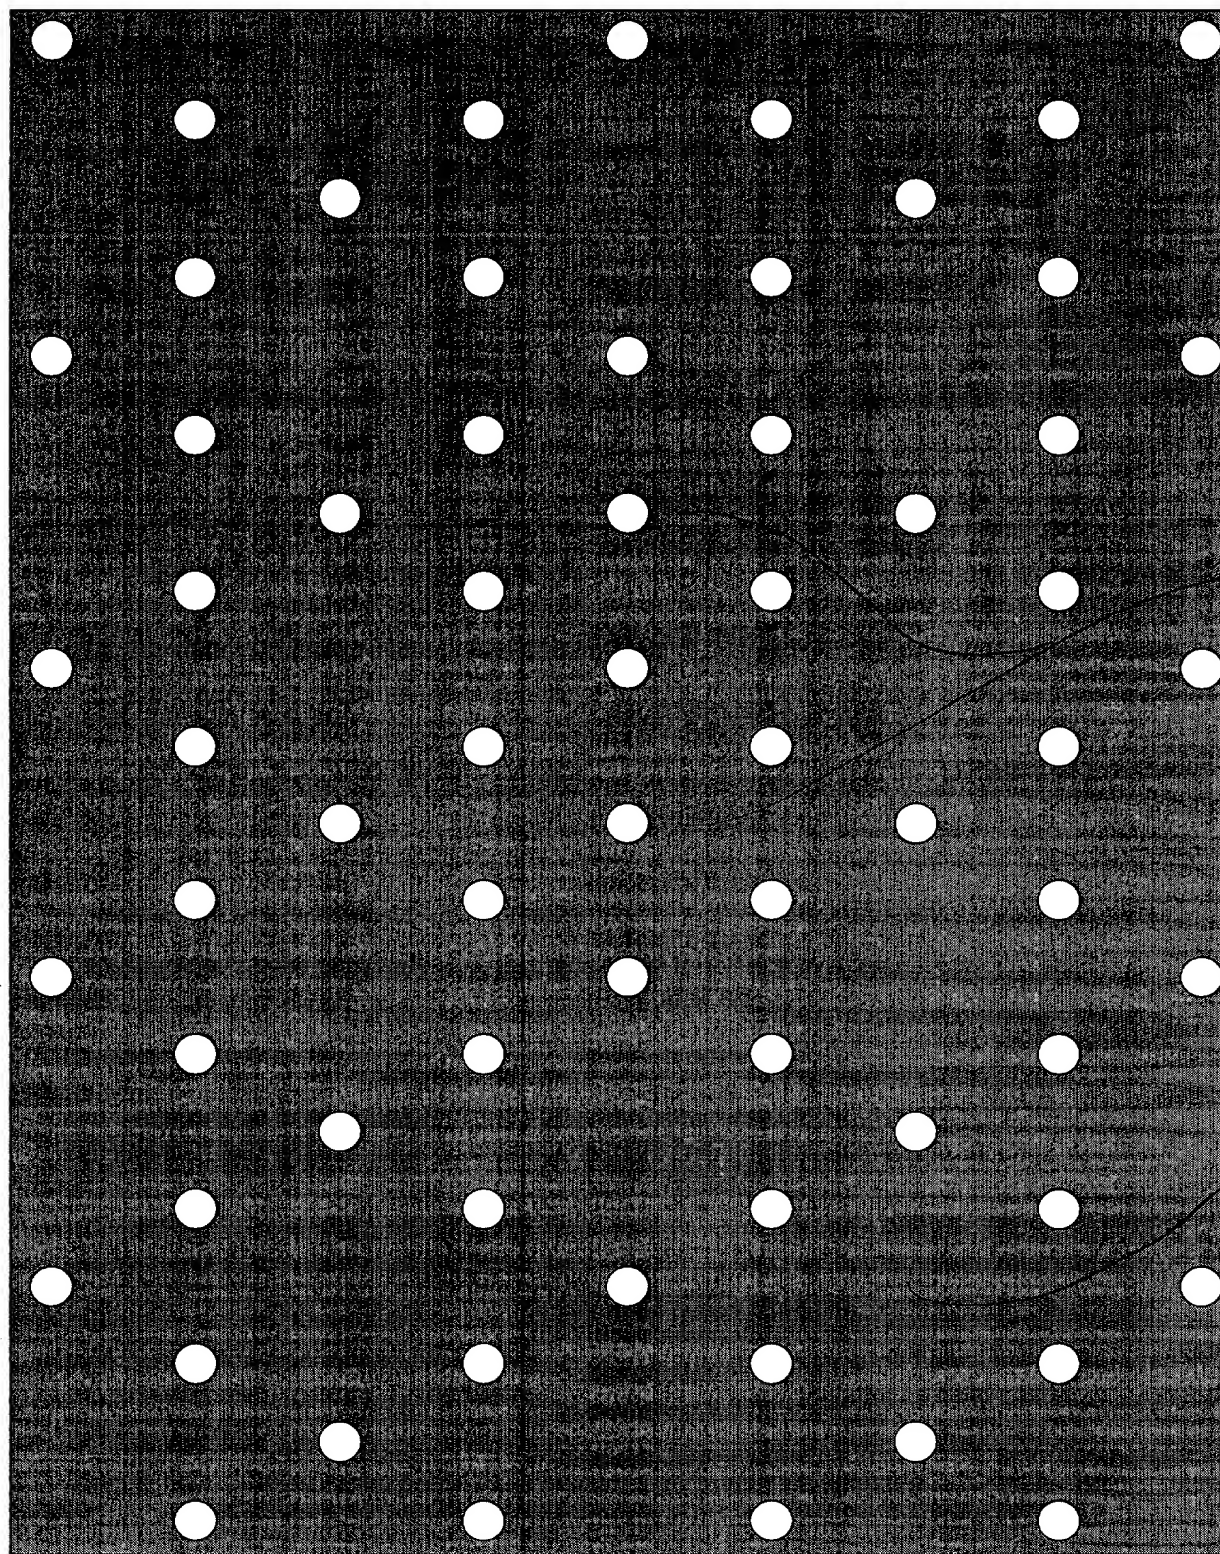

(67)

(68)

FIG. 56

FIG. 52 is a perspective view of a sheet of material having a grid of holes. The sheet is shown in a folded state, with the grid of holes visible on both the top and bottom surfaces. The holes are arranged in a regular pattern, and the sheet is shown with a textured surface.

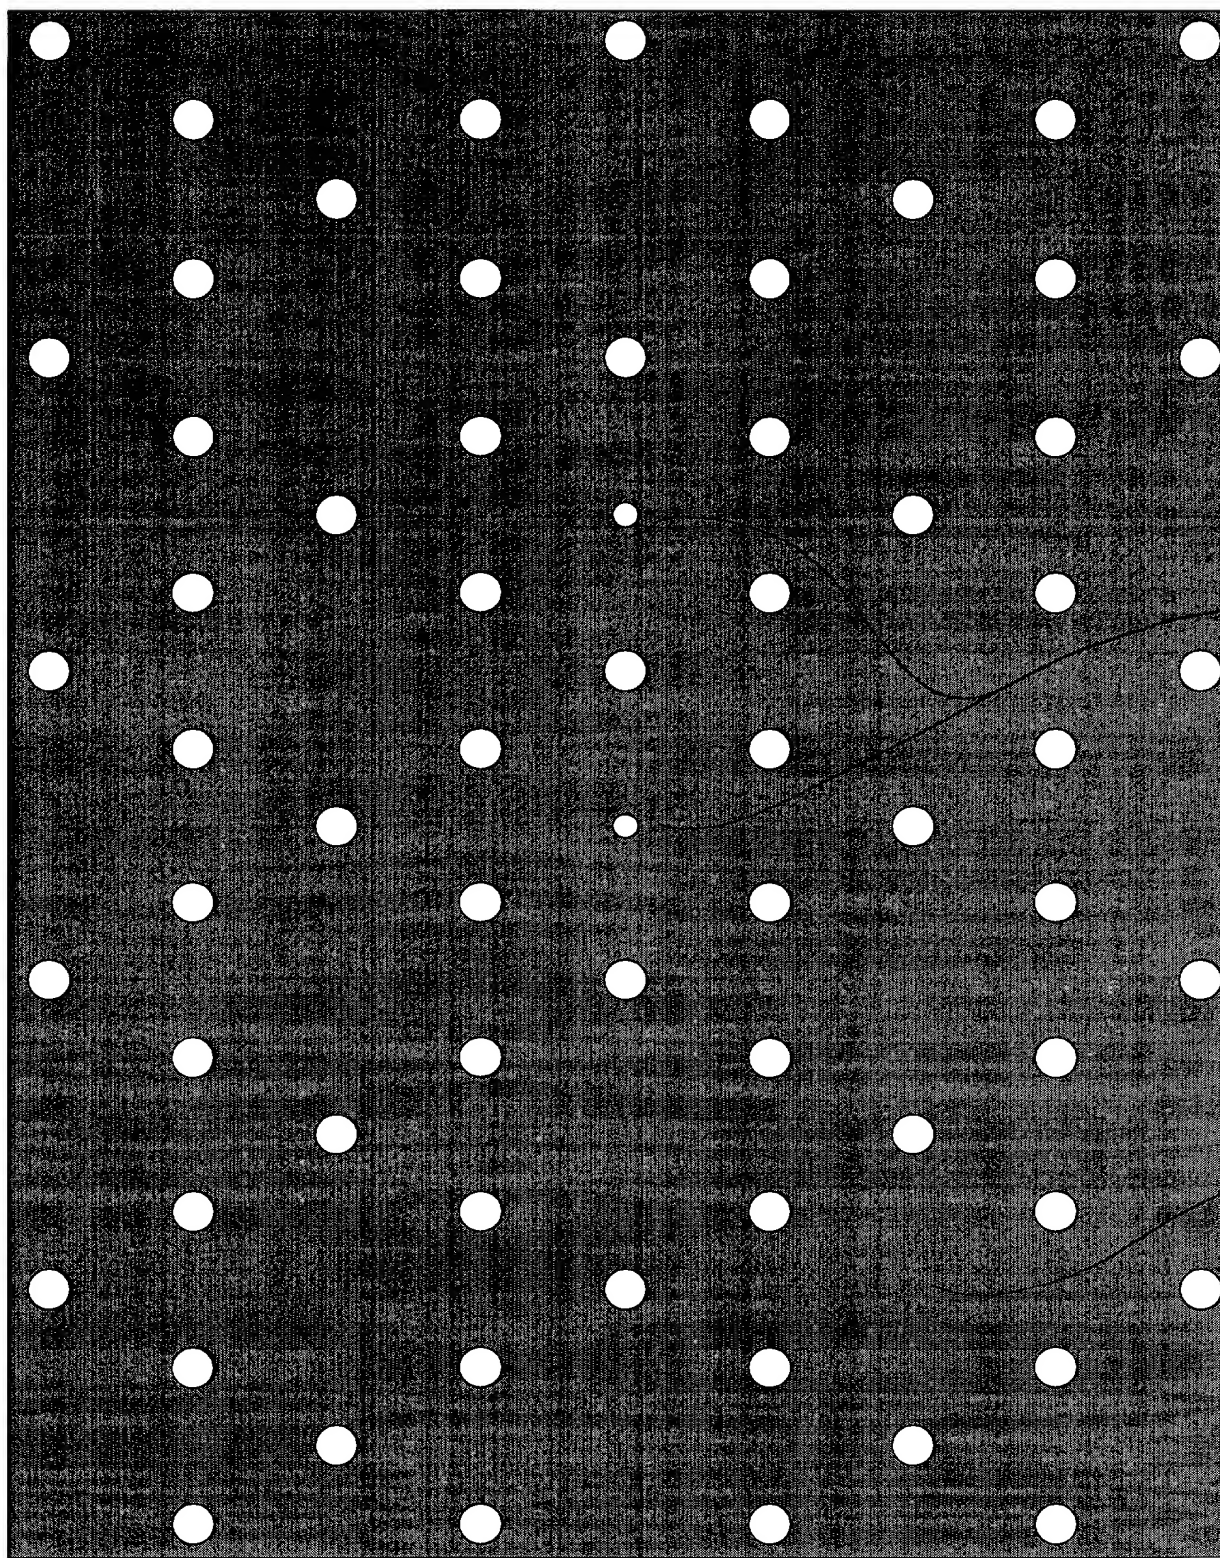


FIG. 52

FIG. 58 is a perspective view of a sheet of material (68) having a grid of circular holes (70) formed therein. The sheet is shown in a folded state, with the holes (70) visible on both the top and bottom surfaces. The material (68) is dark and textured, and the holes (70) are light-colored and circular.

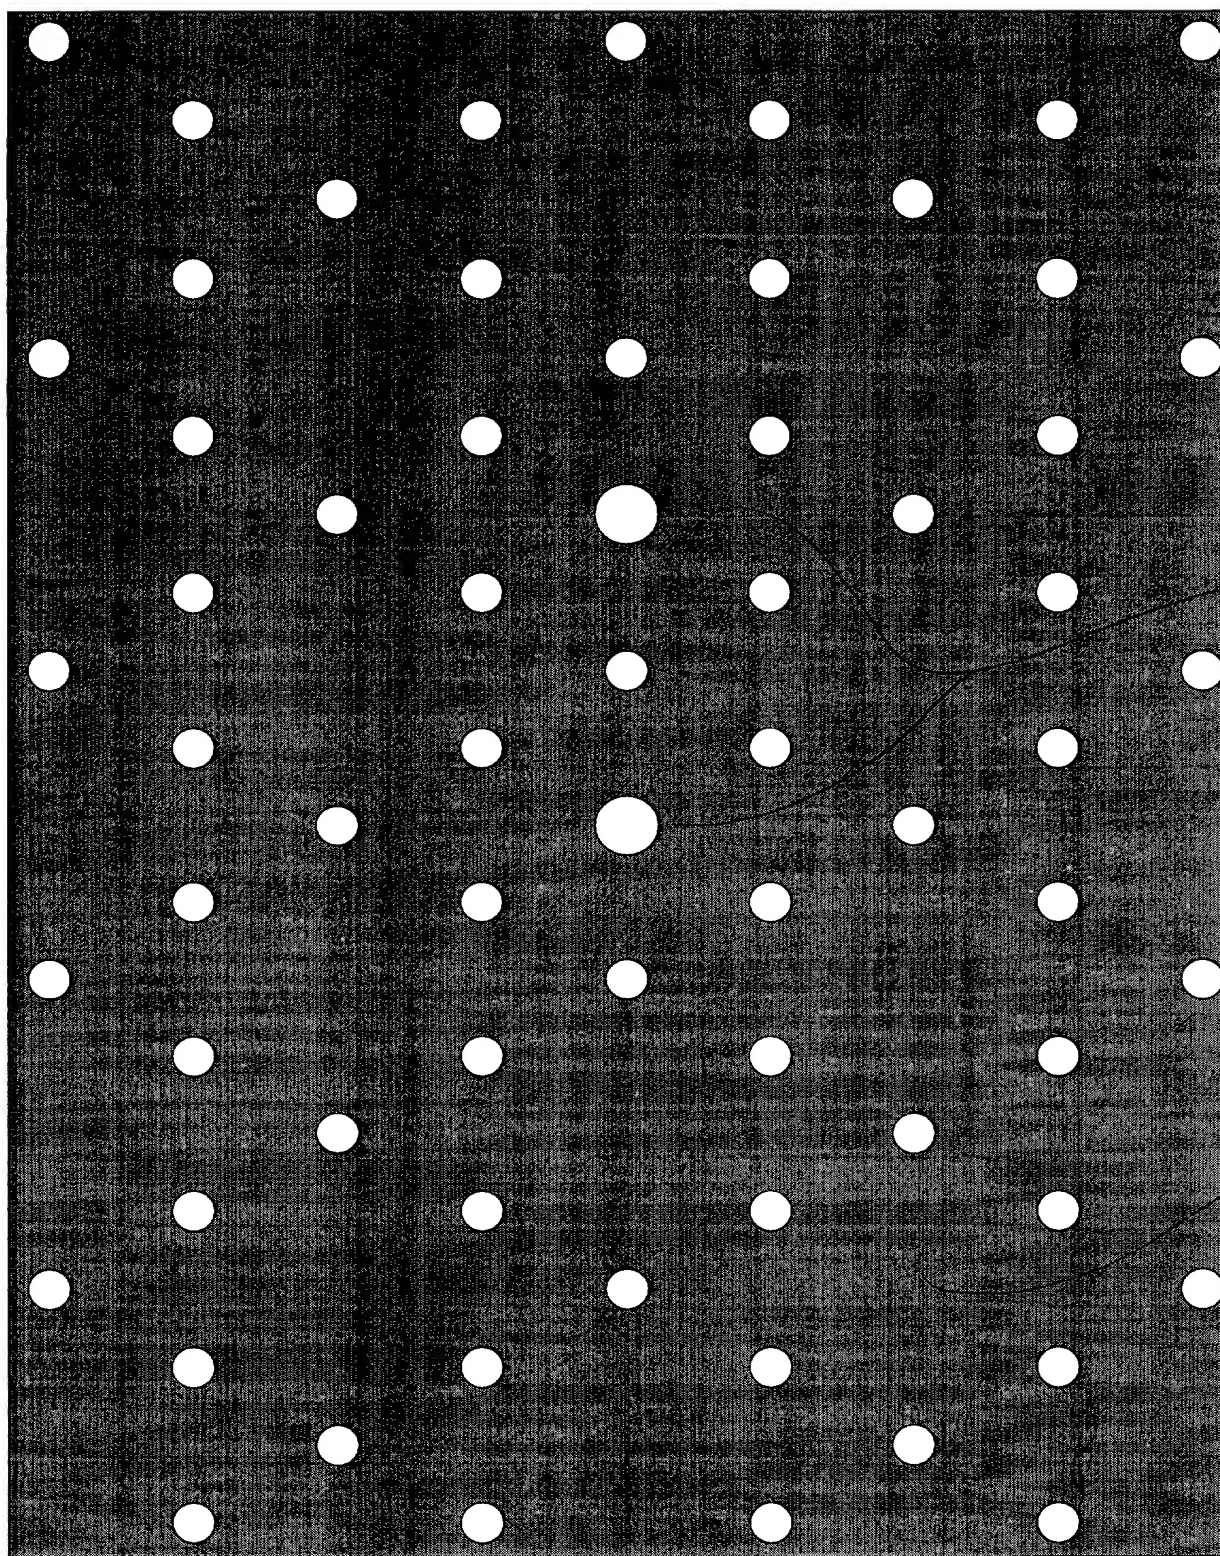


FIG 58

FIG. 60

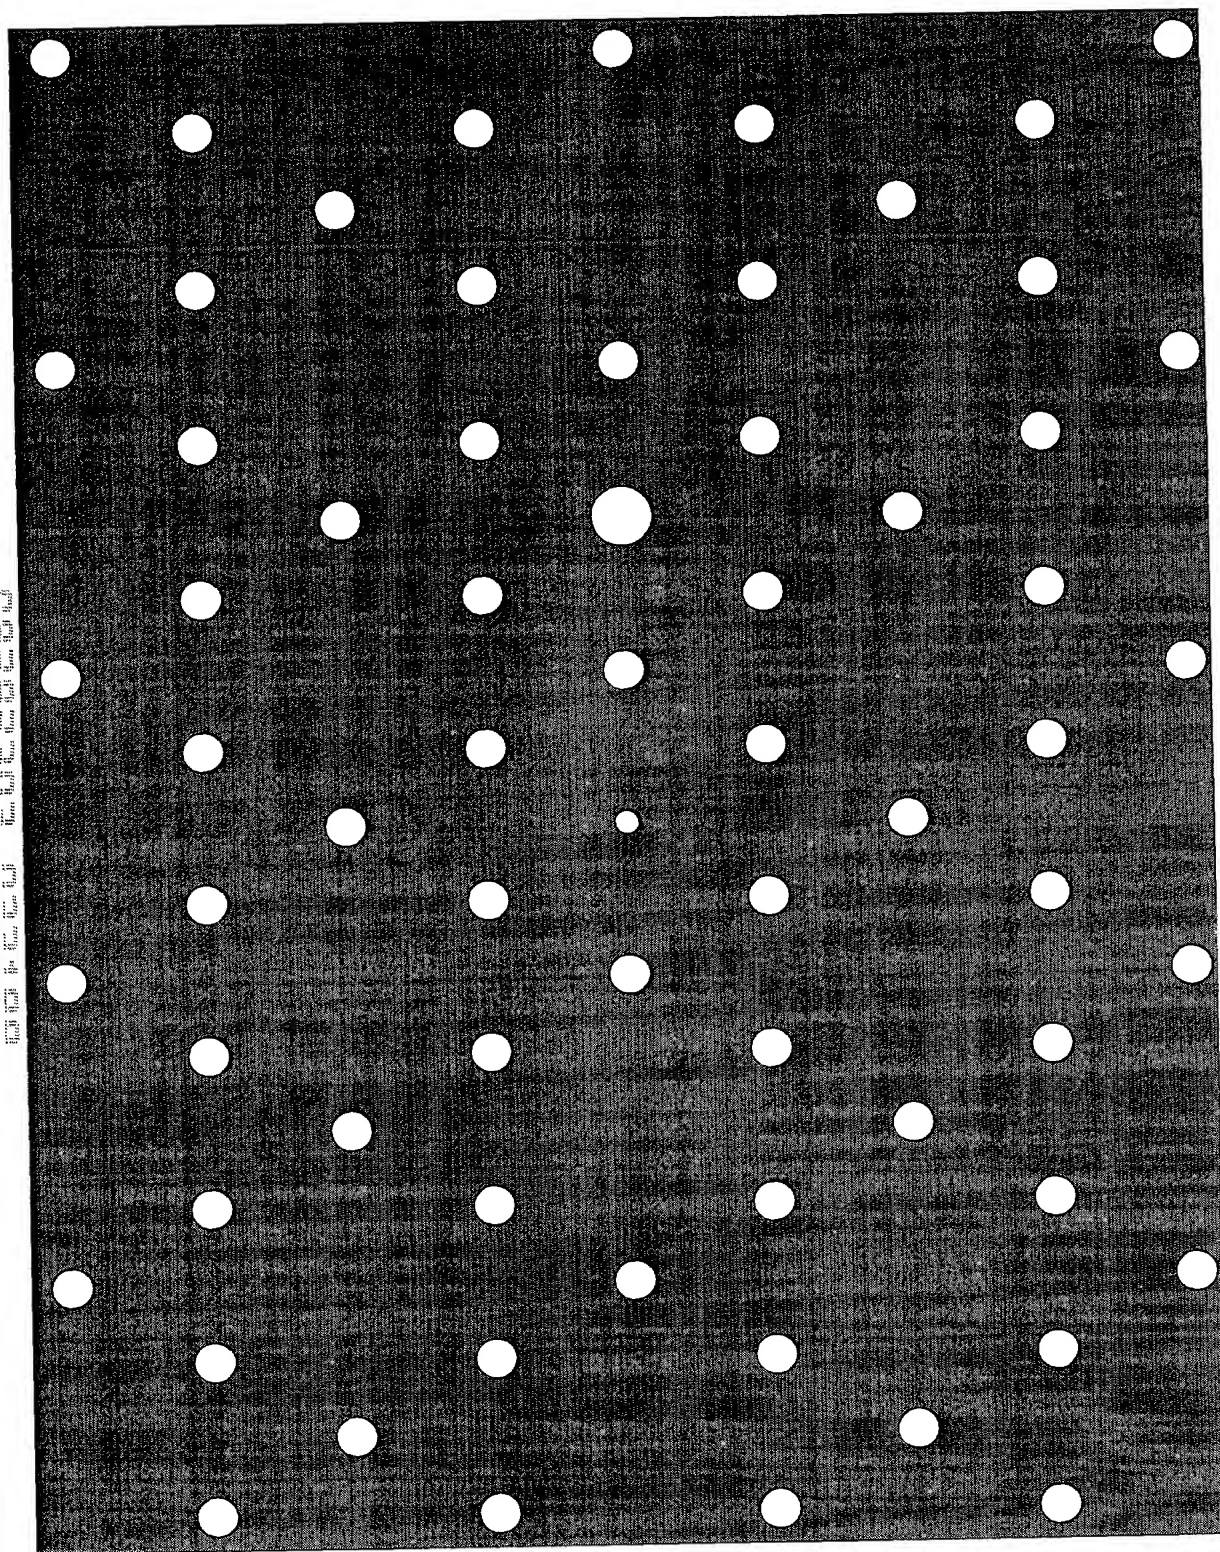


FIG. 60

FIG. 61

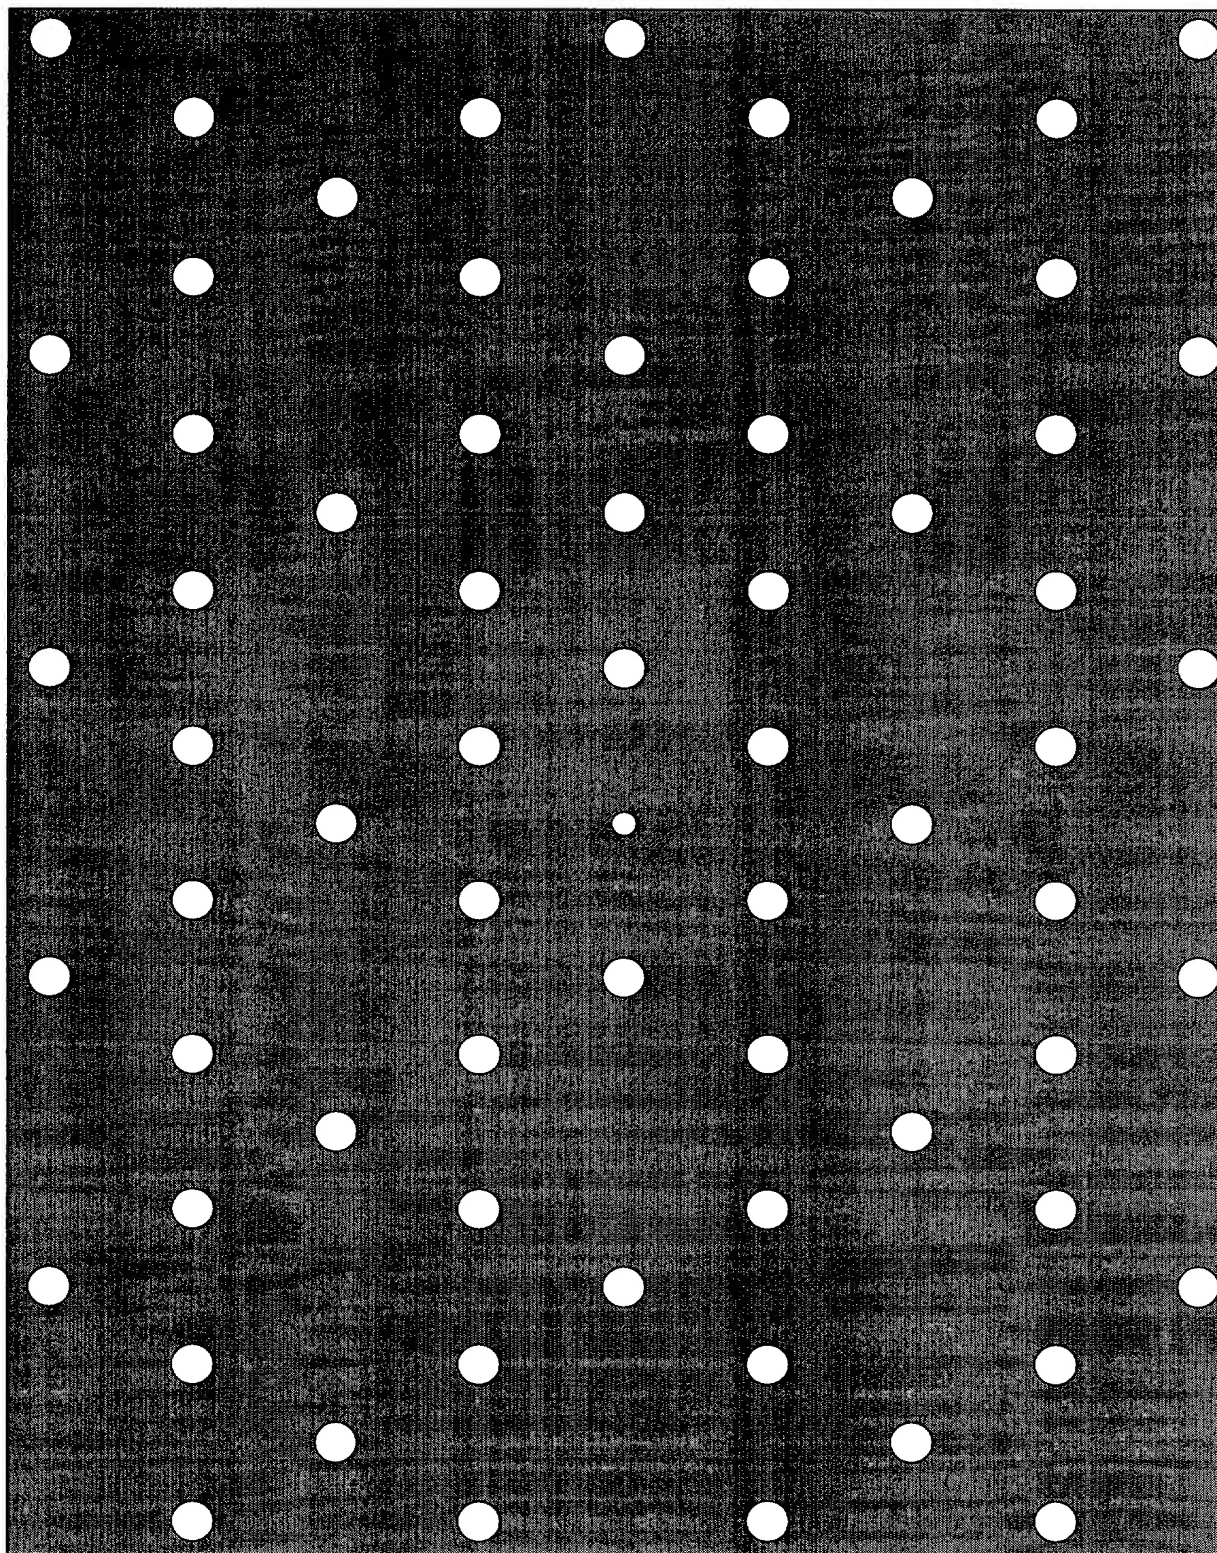


FIG. 61

FIG. 62 is a perspective view of a sheet of material (70) having a grid of circular holes (71) formed therein. The sheet (70) is shown in a folded state, with the grid of holes (71) visible on both the front and back surfaces. The holes (71) are arranged in a regular, repeating pattern across the entire surface of the sheet (70).

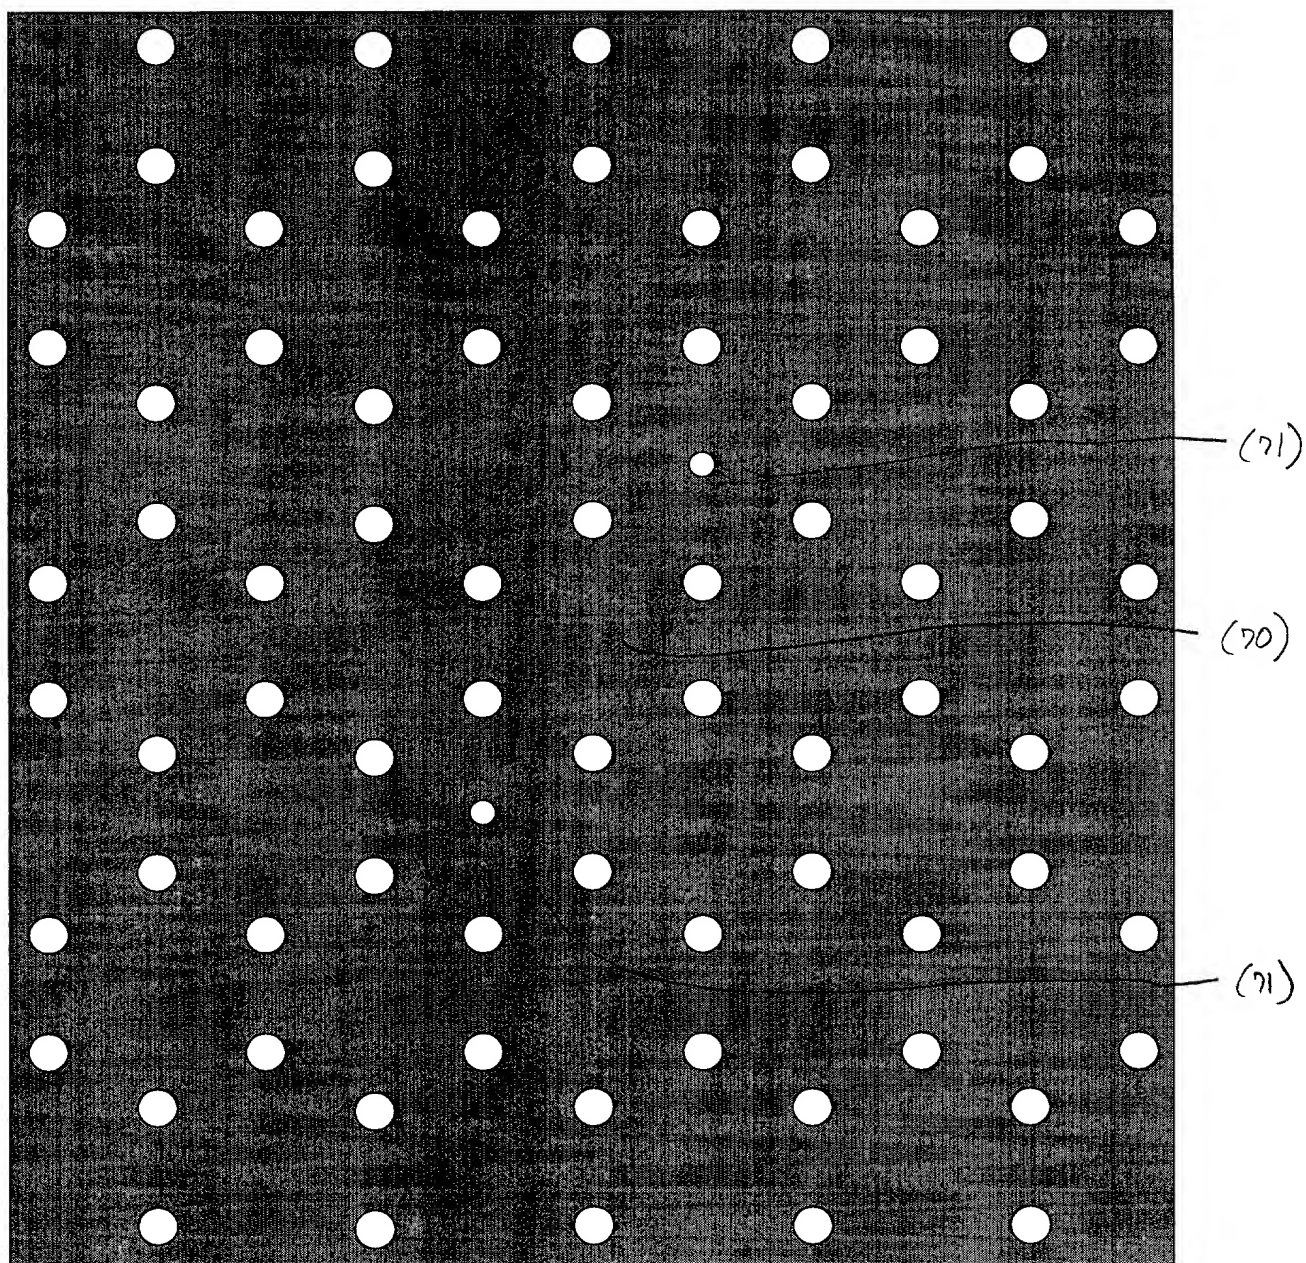


FIG 62

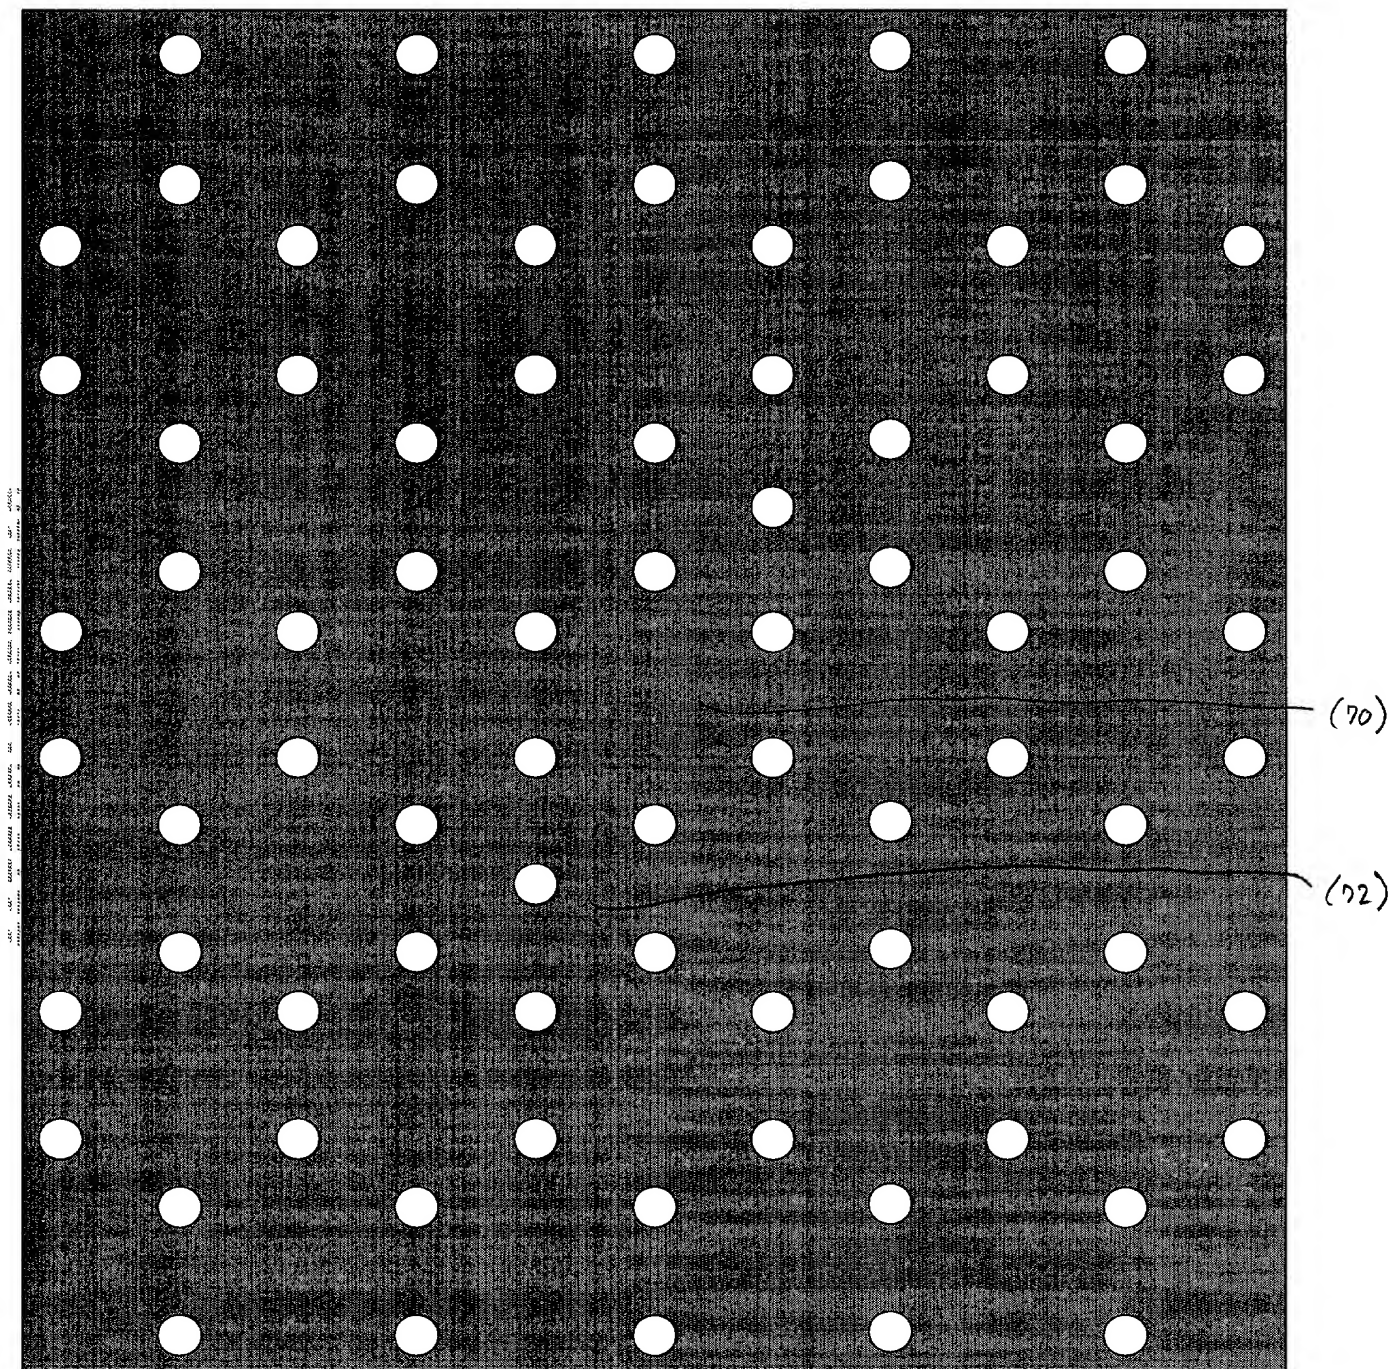


FIG. 63

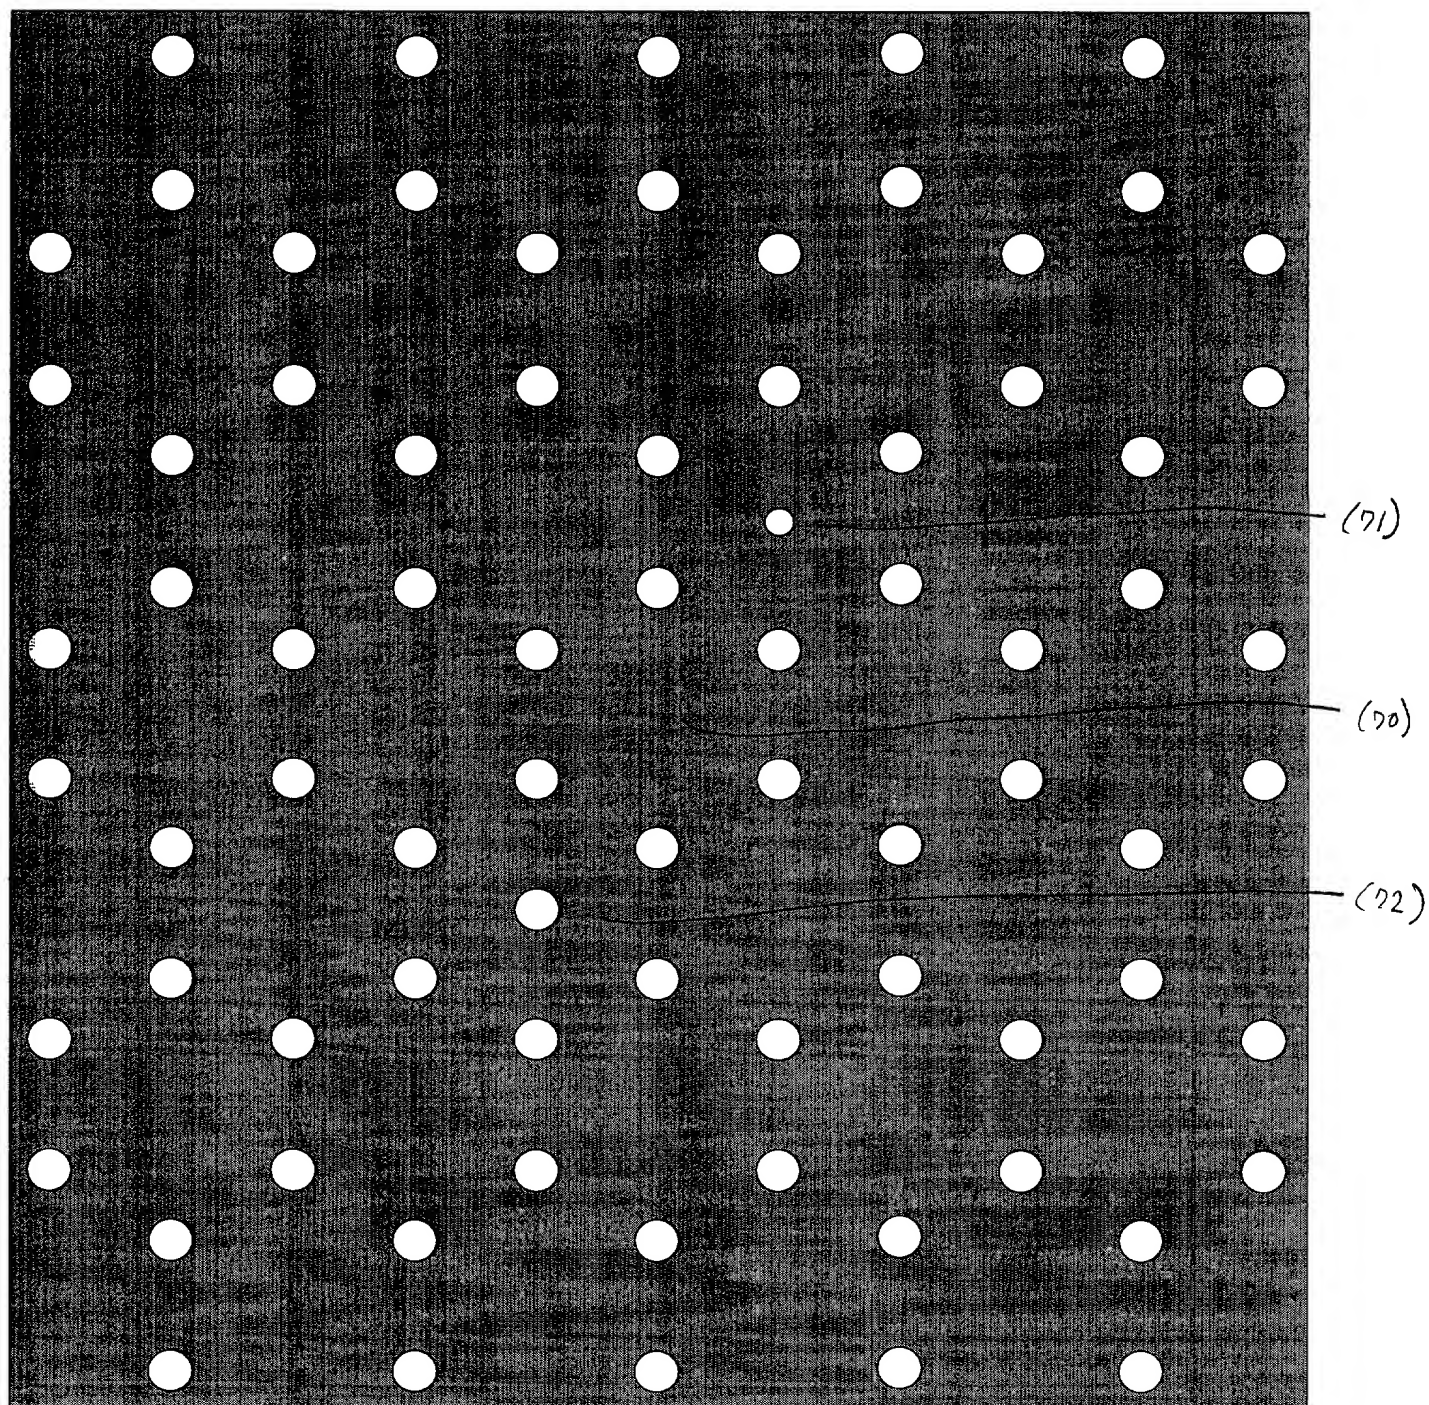


FIG. 64

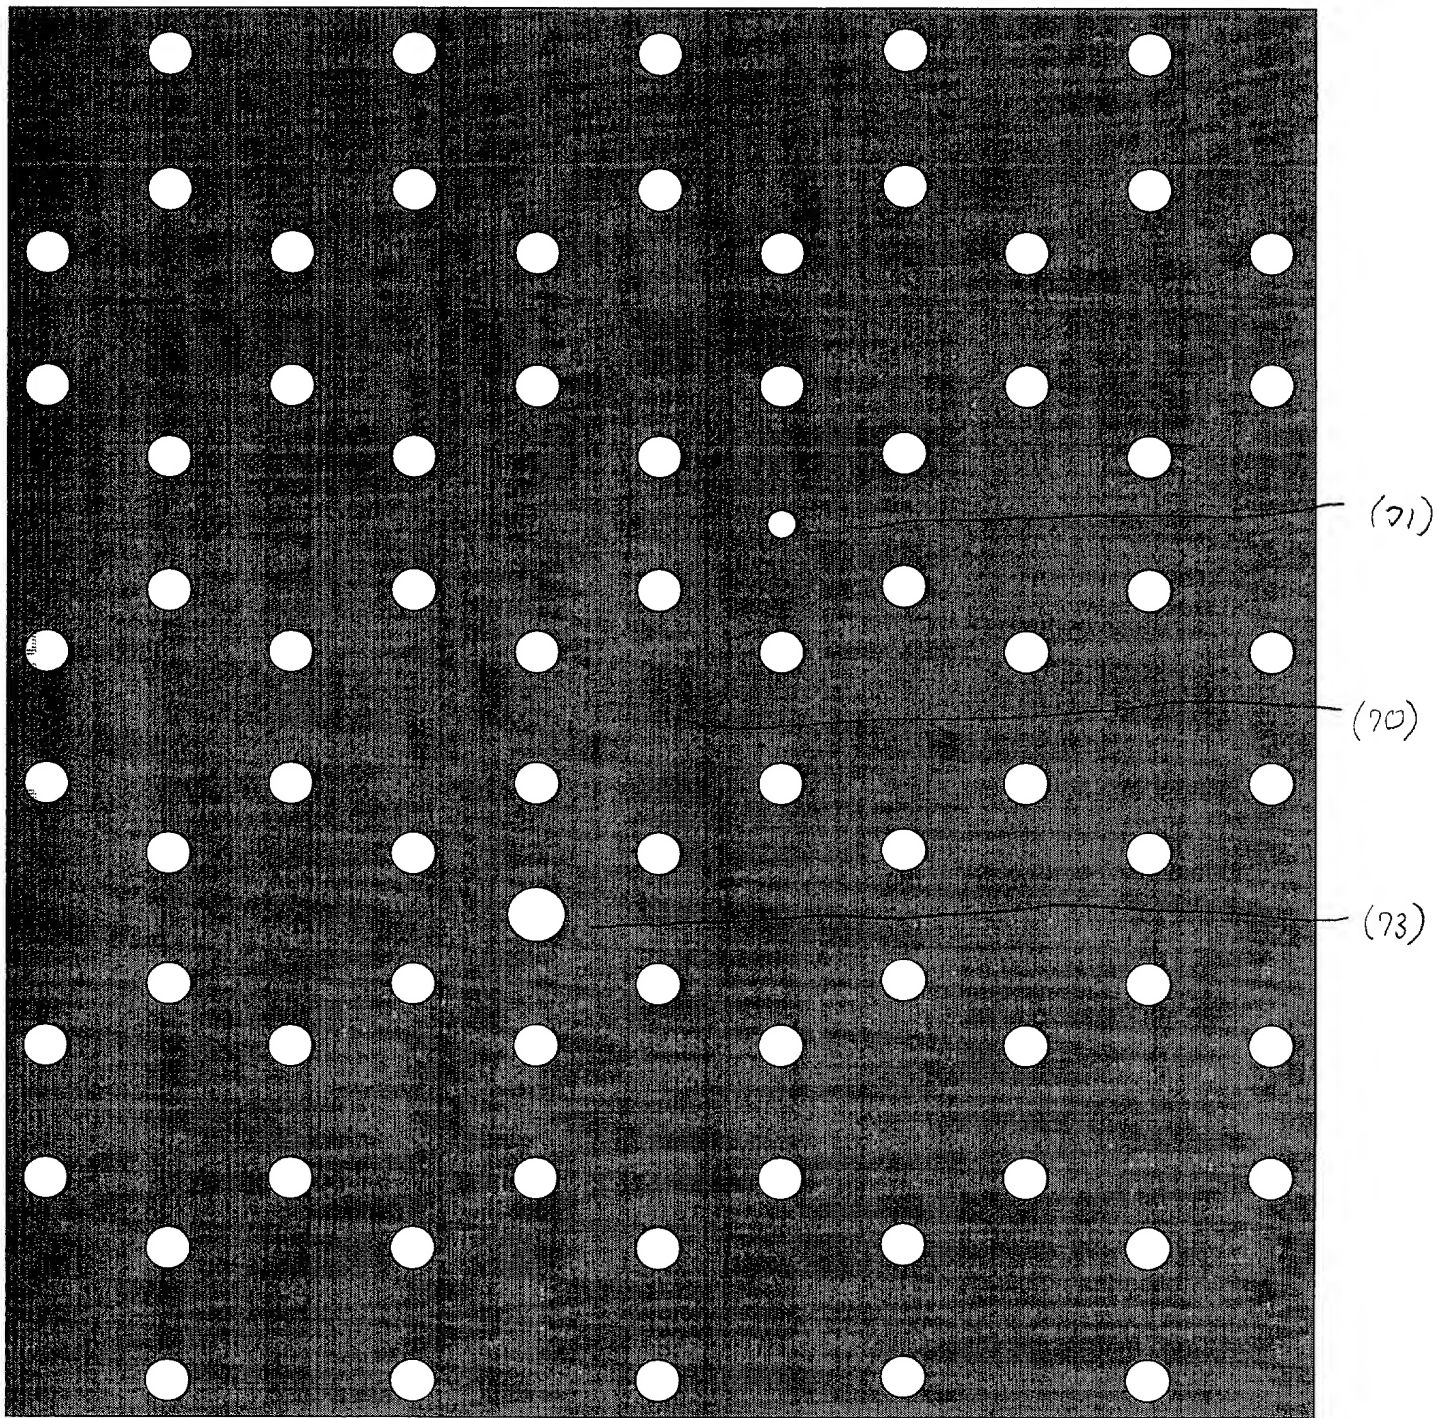


FIG. 65

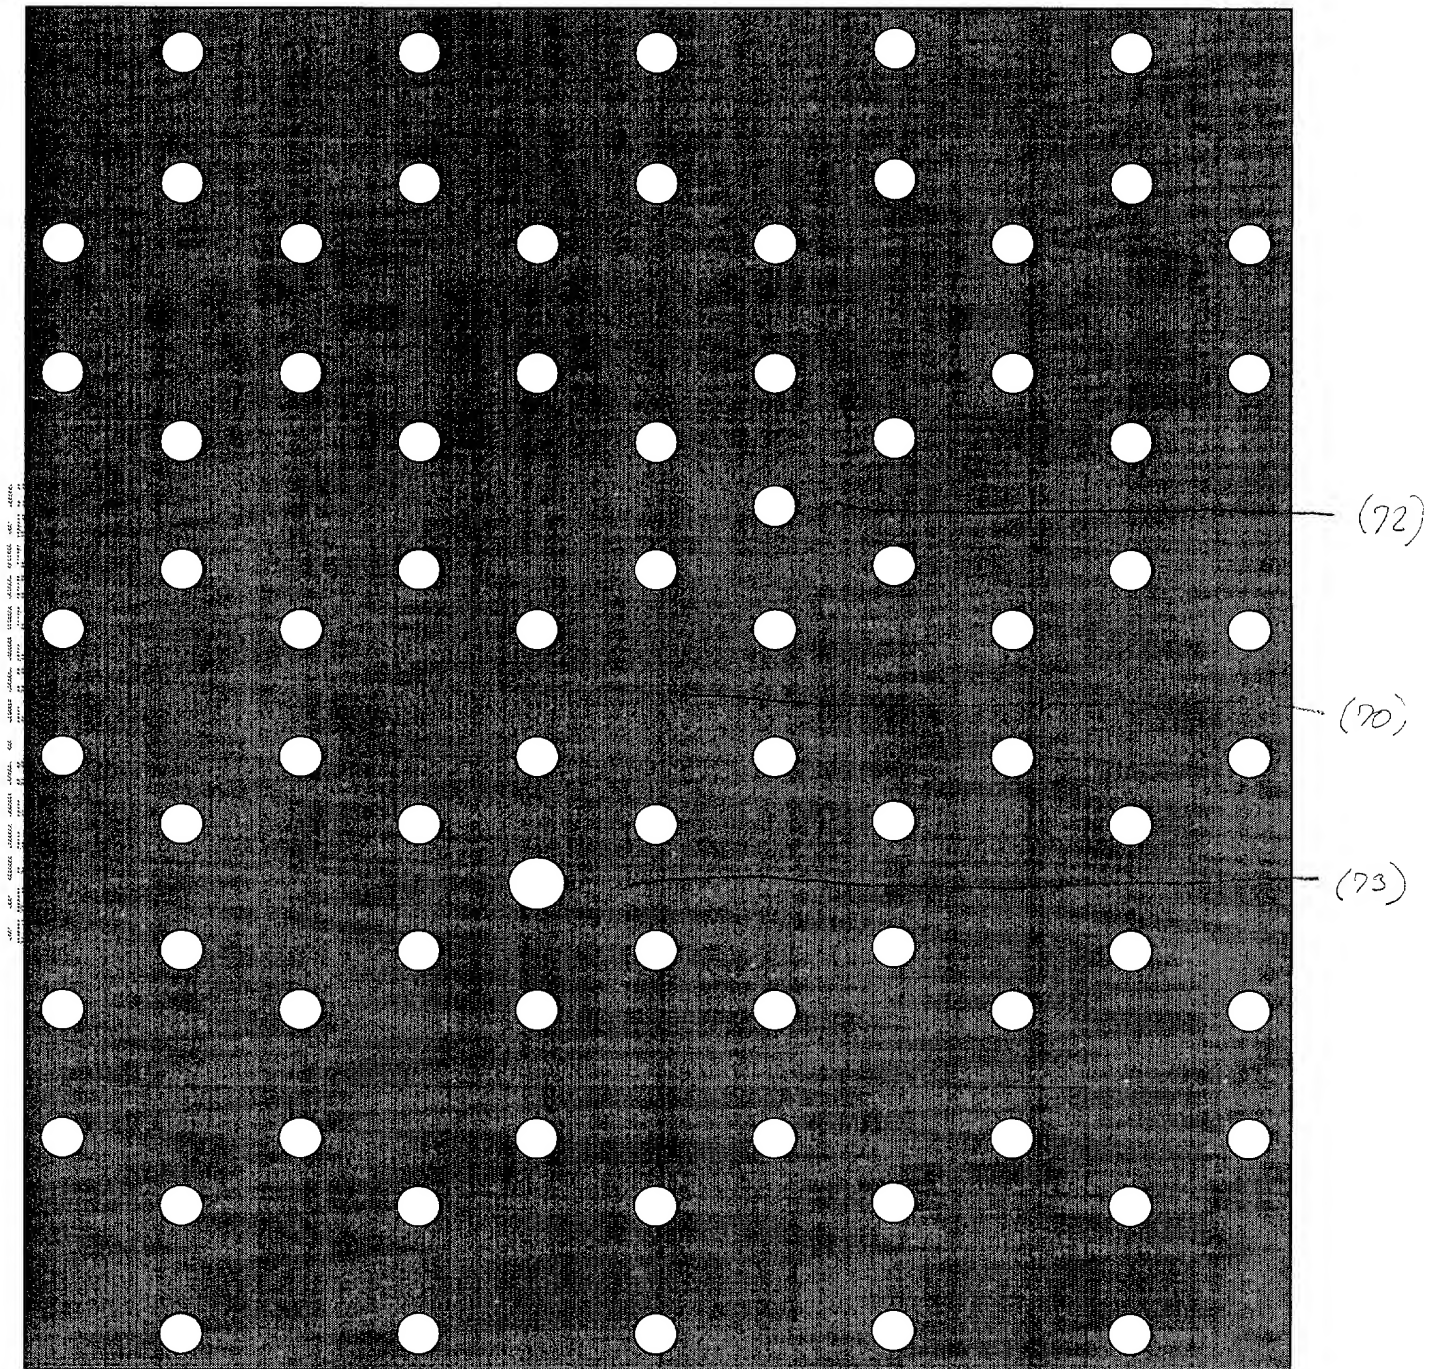


FIG. 66

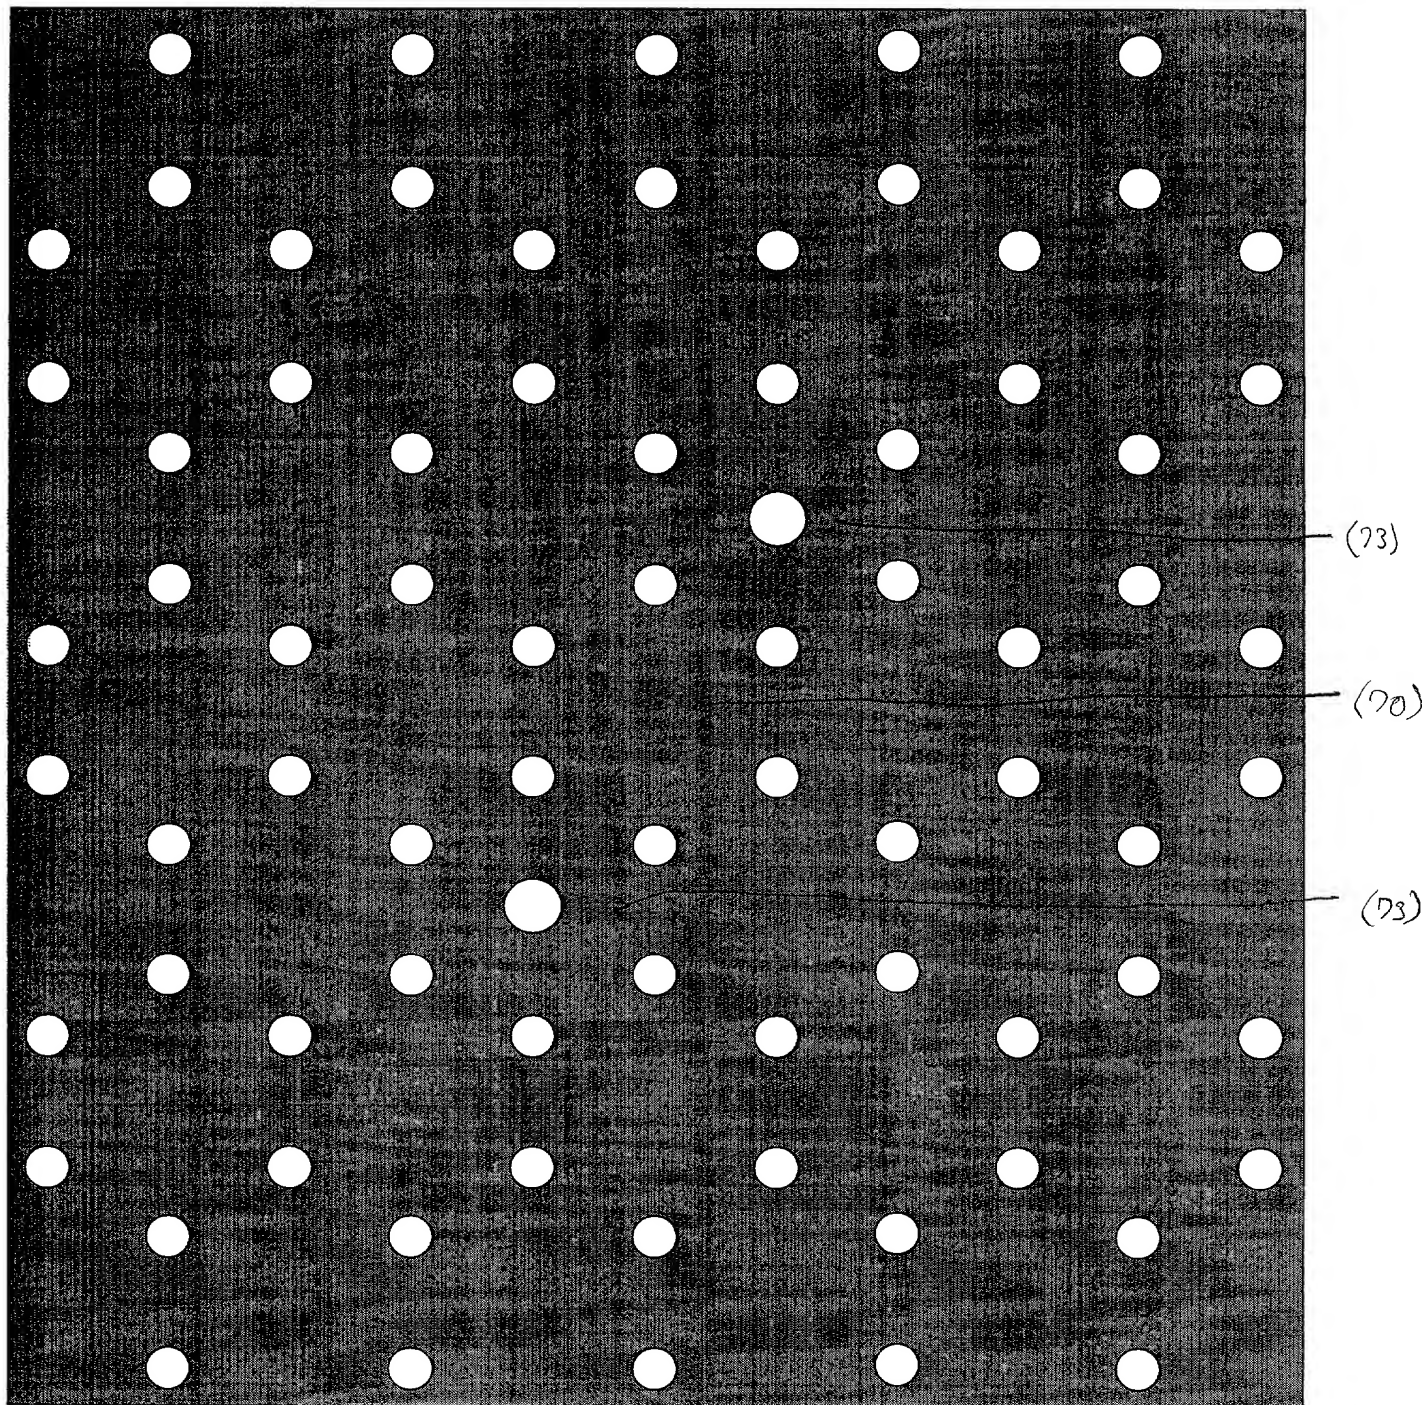


FIG. 67

FIG. 68

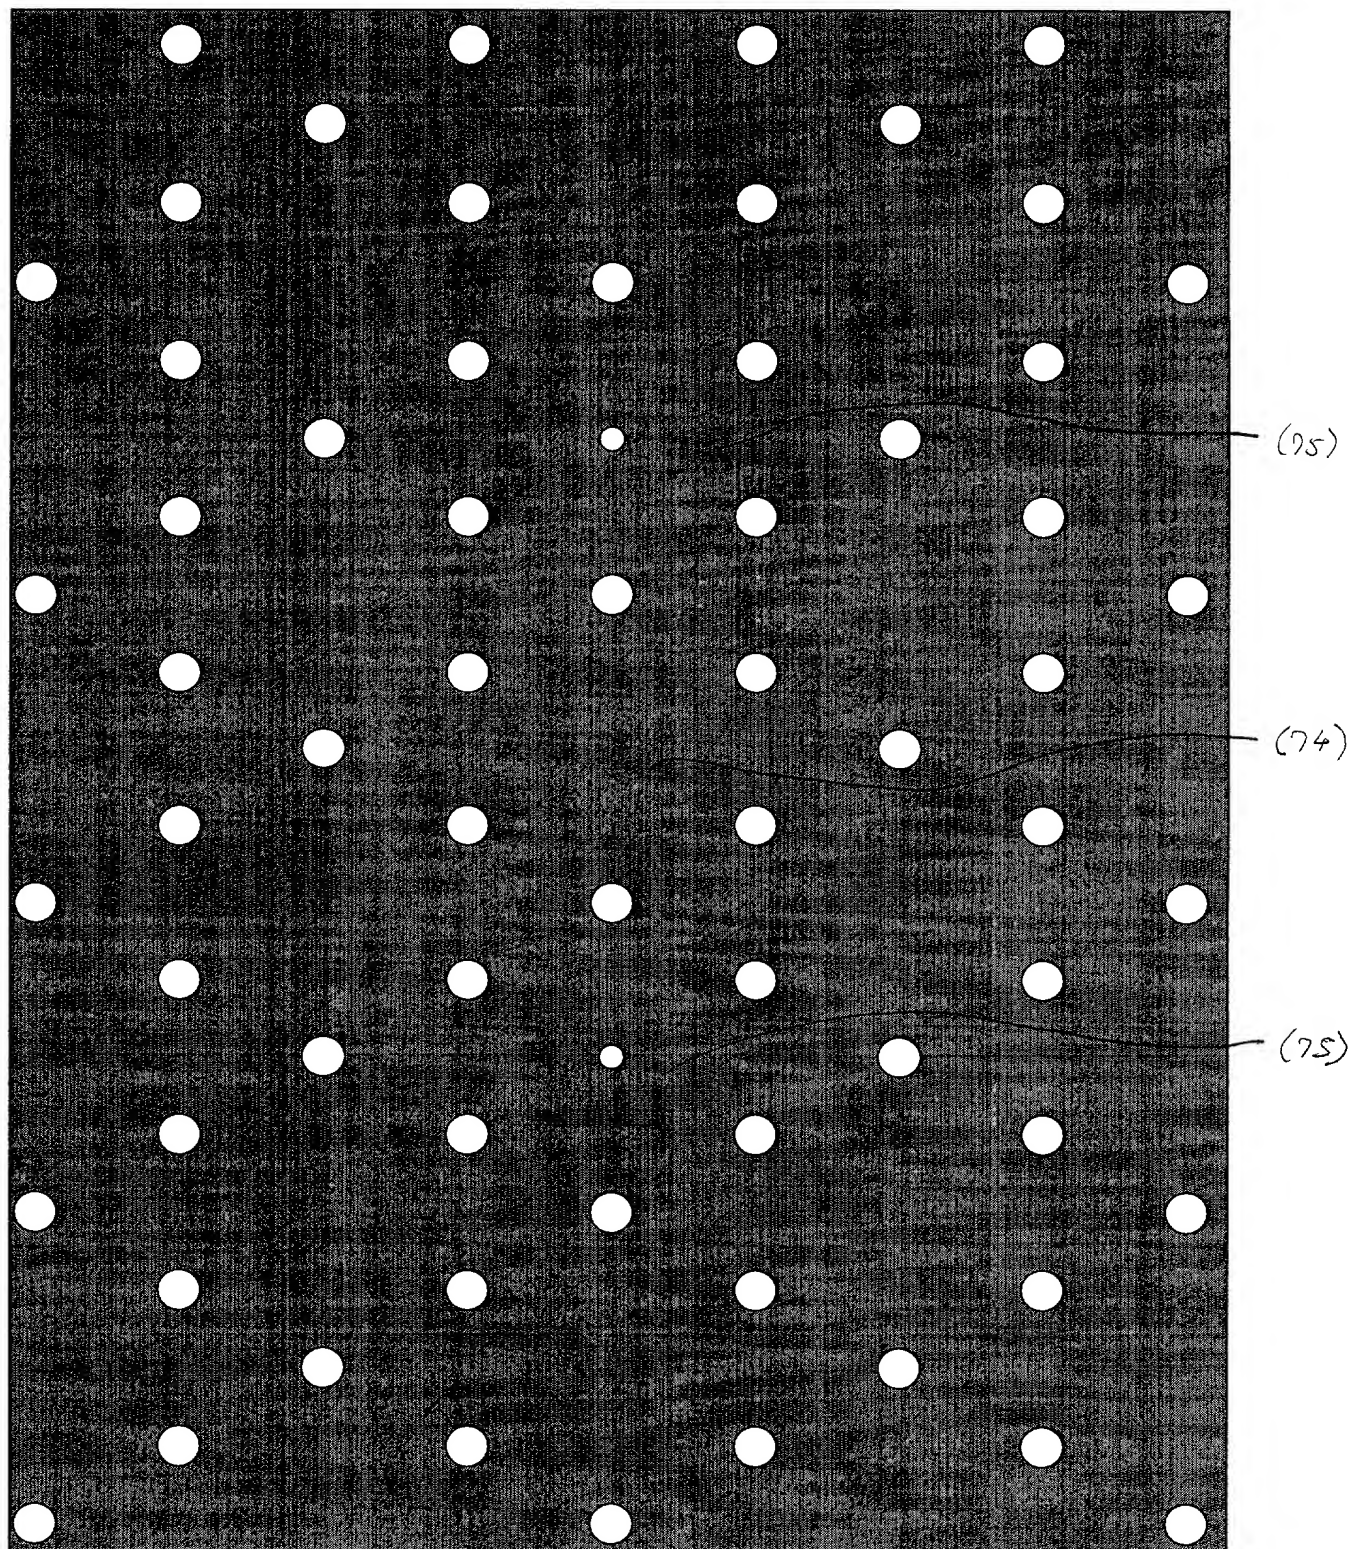


FIG. 68

FIG. 69 is a perspective view of a sheet of material having a grid of holes. The sheet is shown in a folded state, with the fold lines indicated by dashed lines. The holes are arranged in a regular grid pattern. The sheet is labeled with (74) and (76) to indicate specific features.

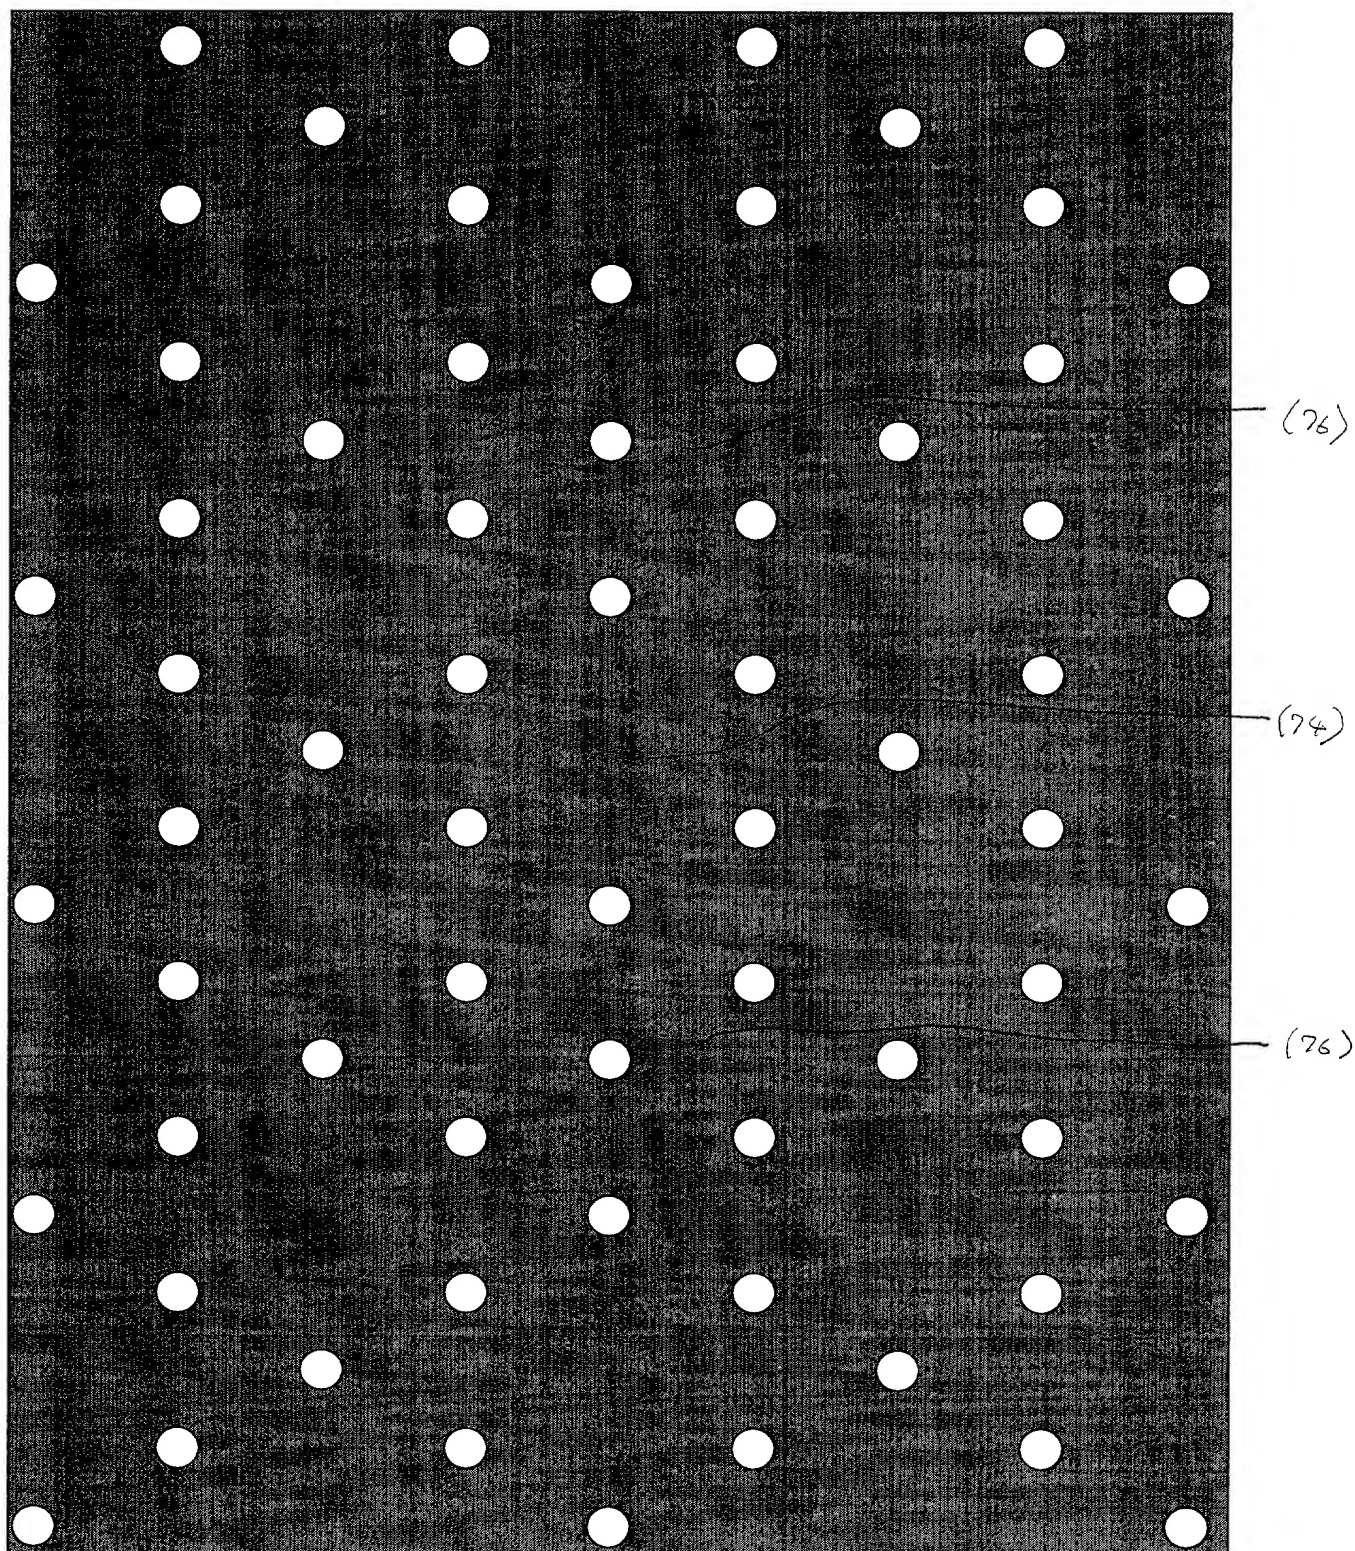


FIG. 69

FIG. 20

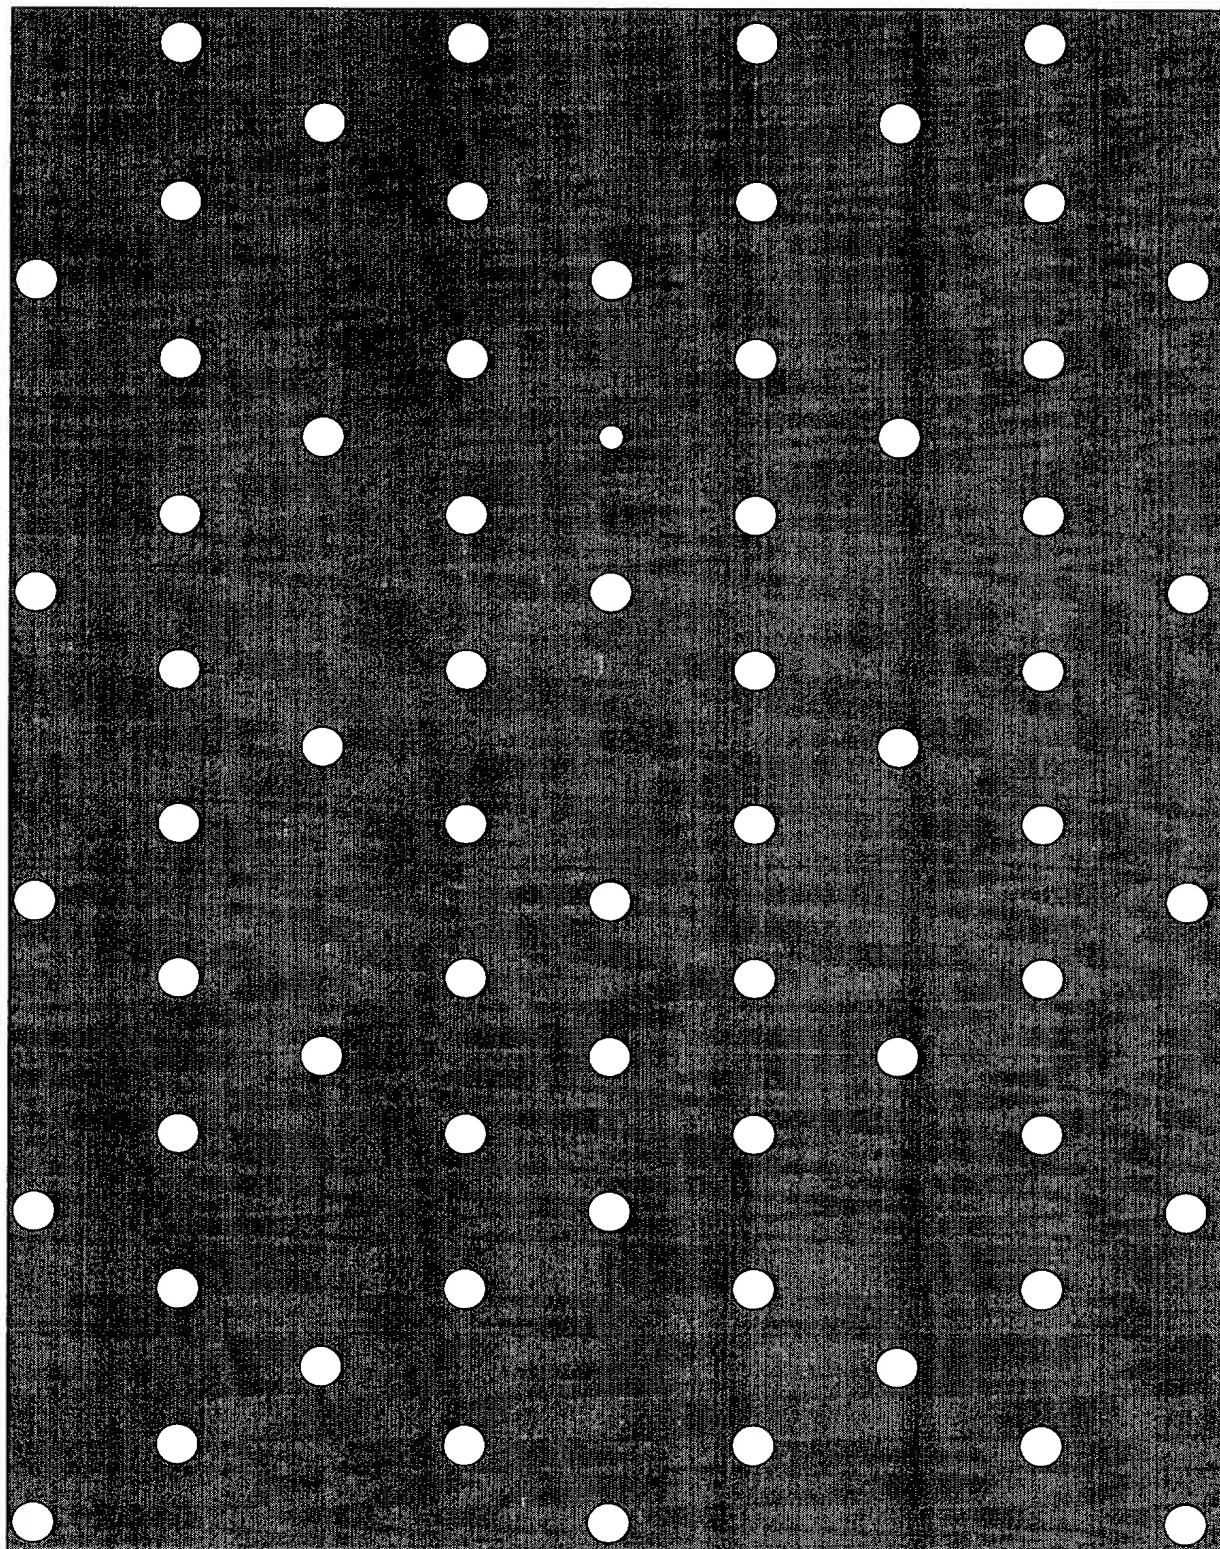


FIG 20

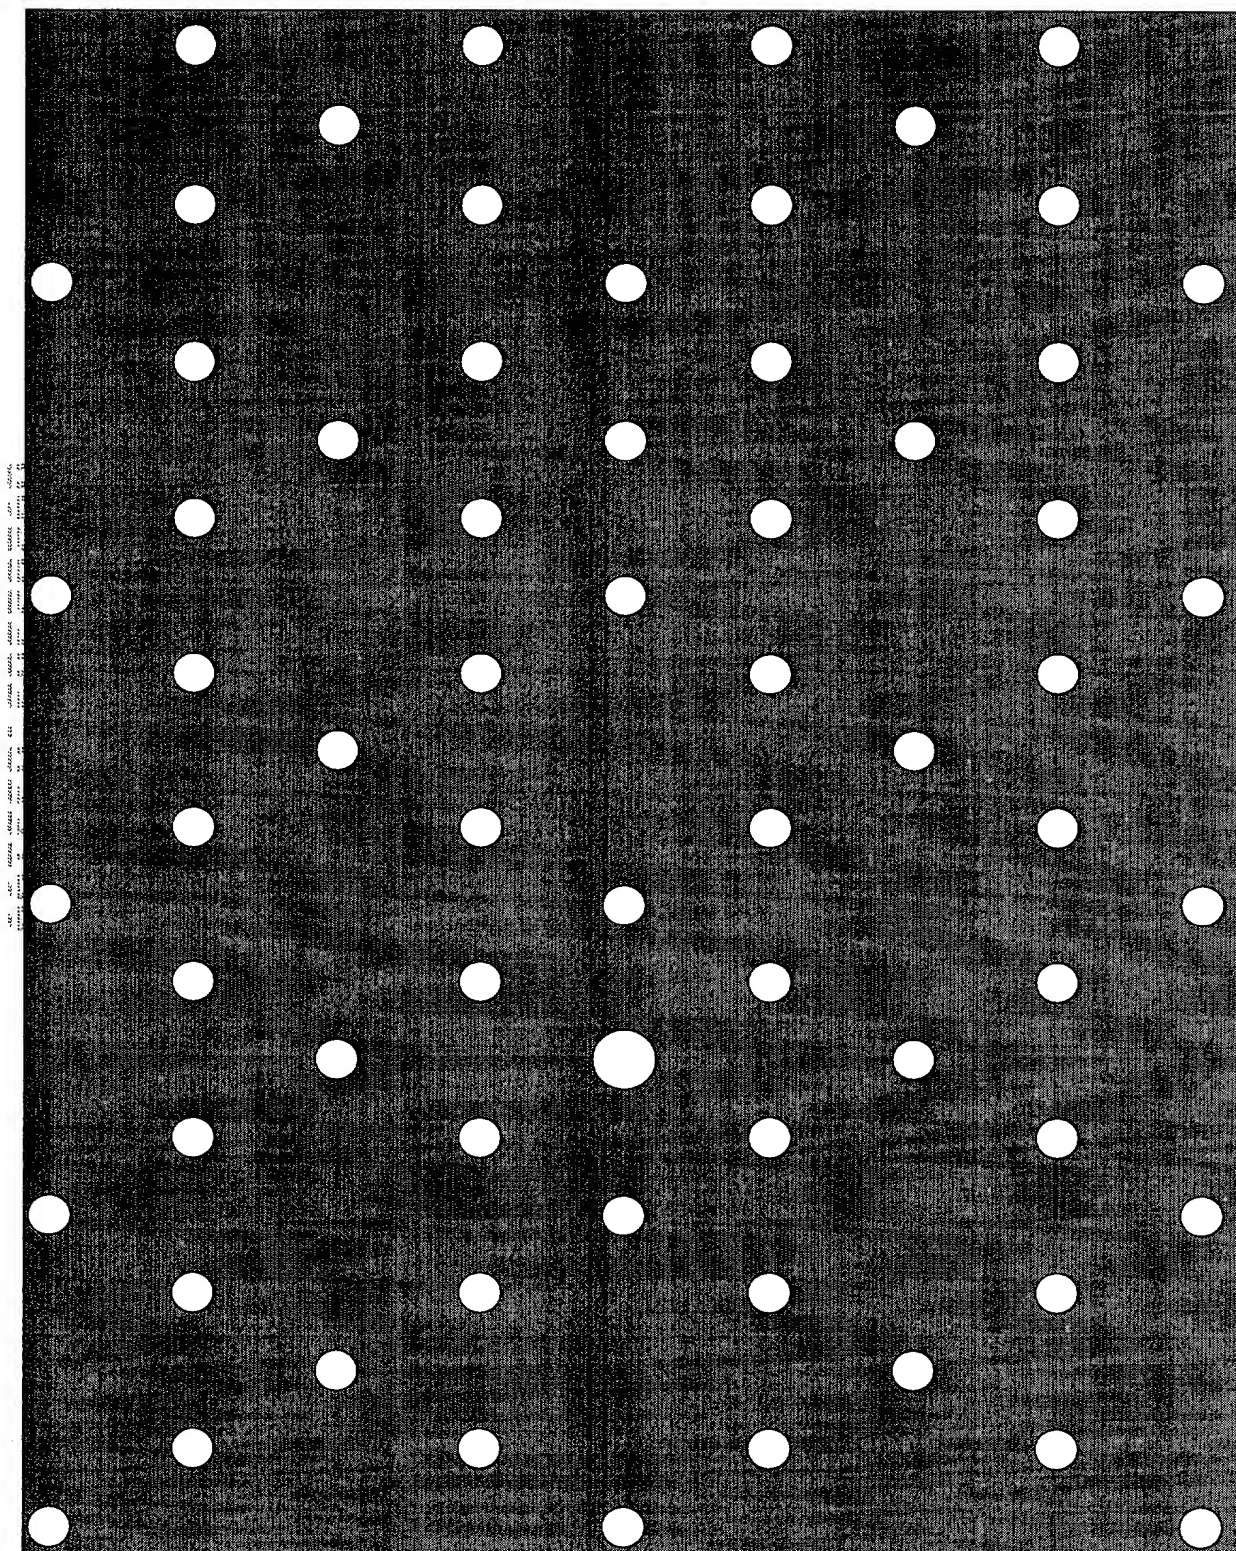


FIG. 72

FIG. 23

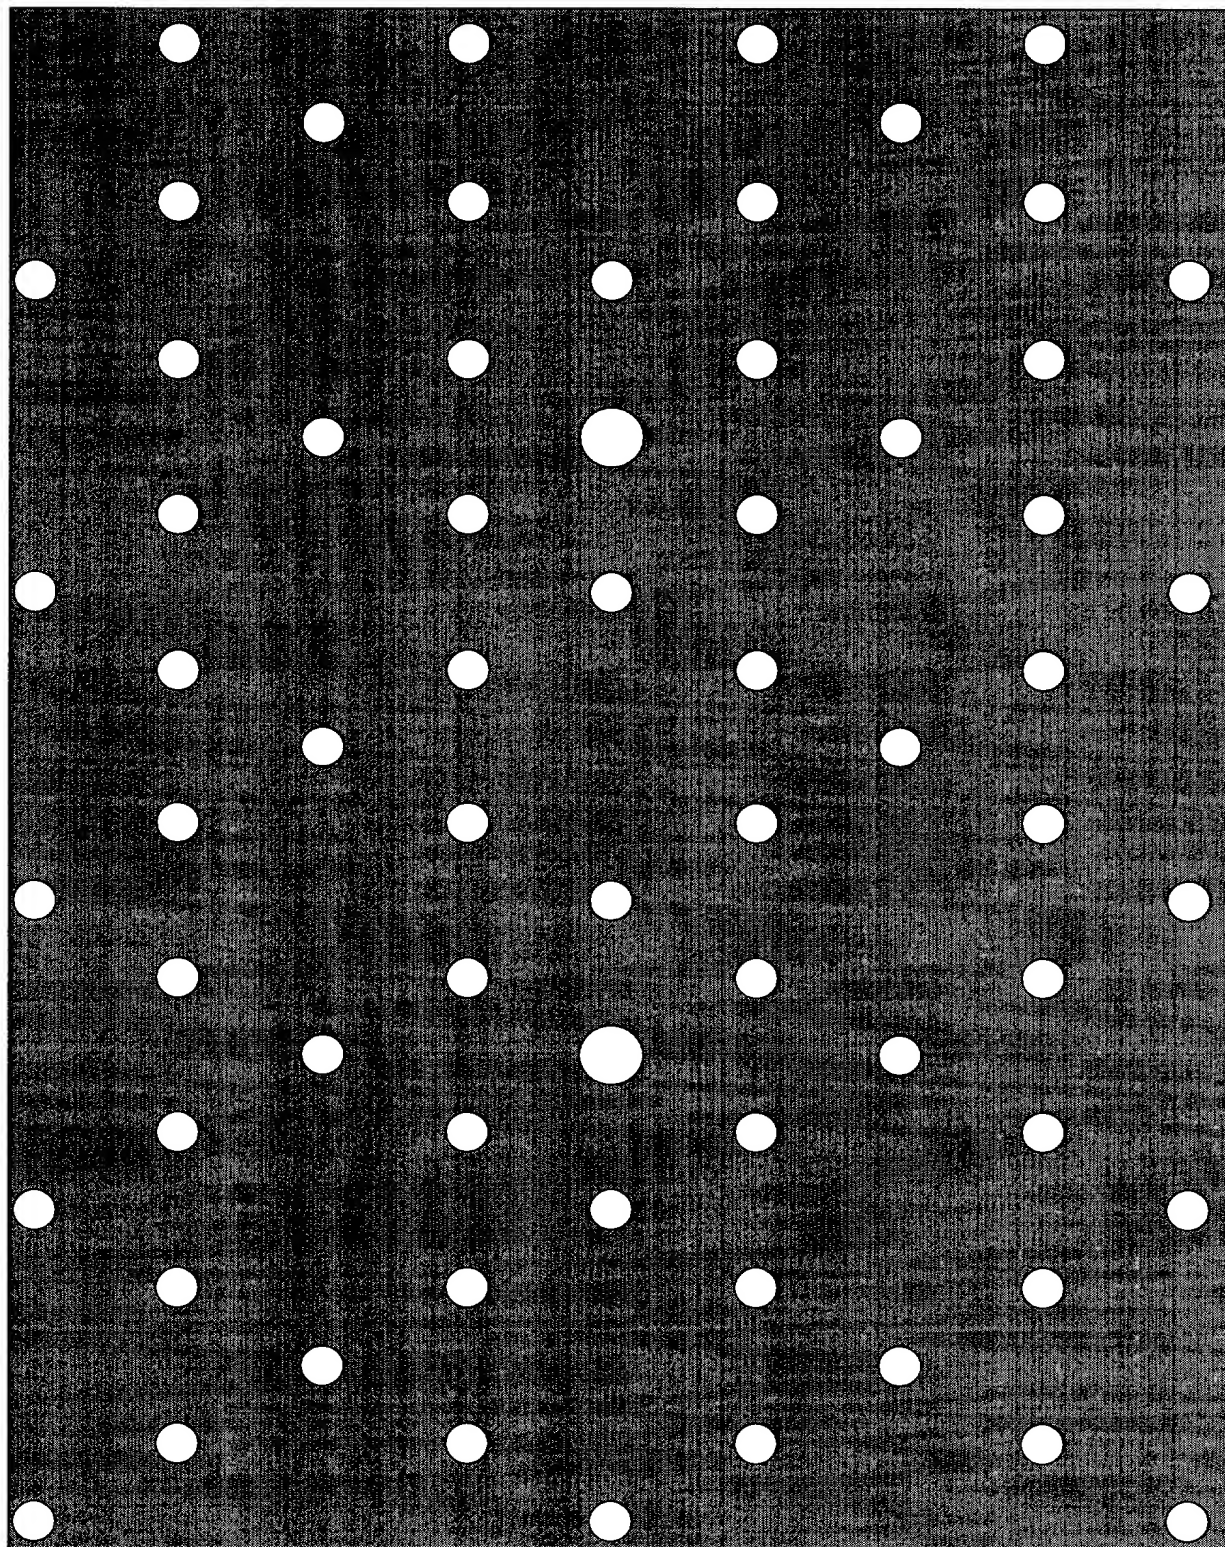


FIG. 23

FIG. 74

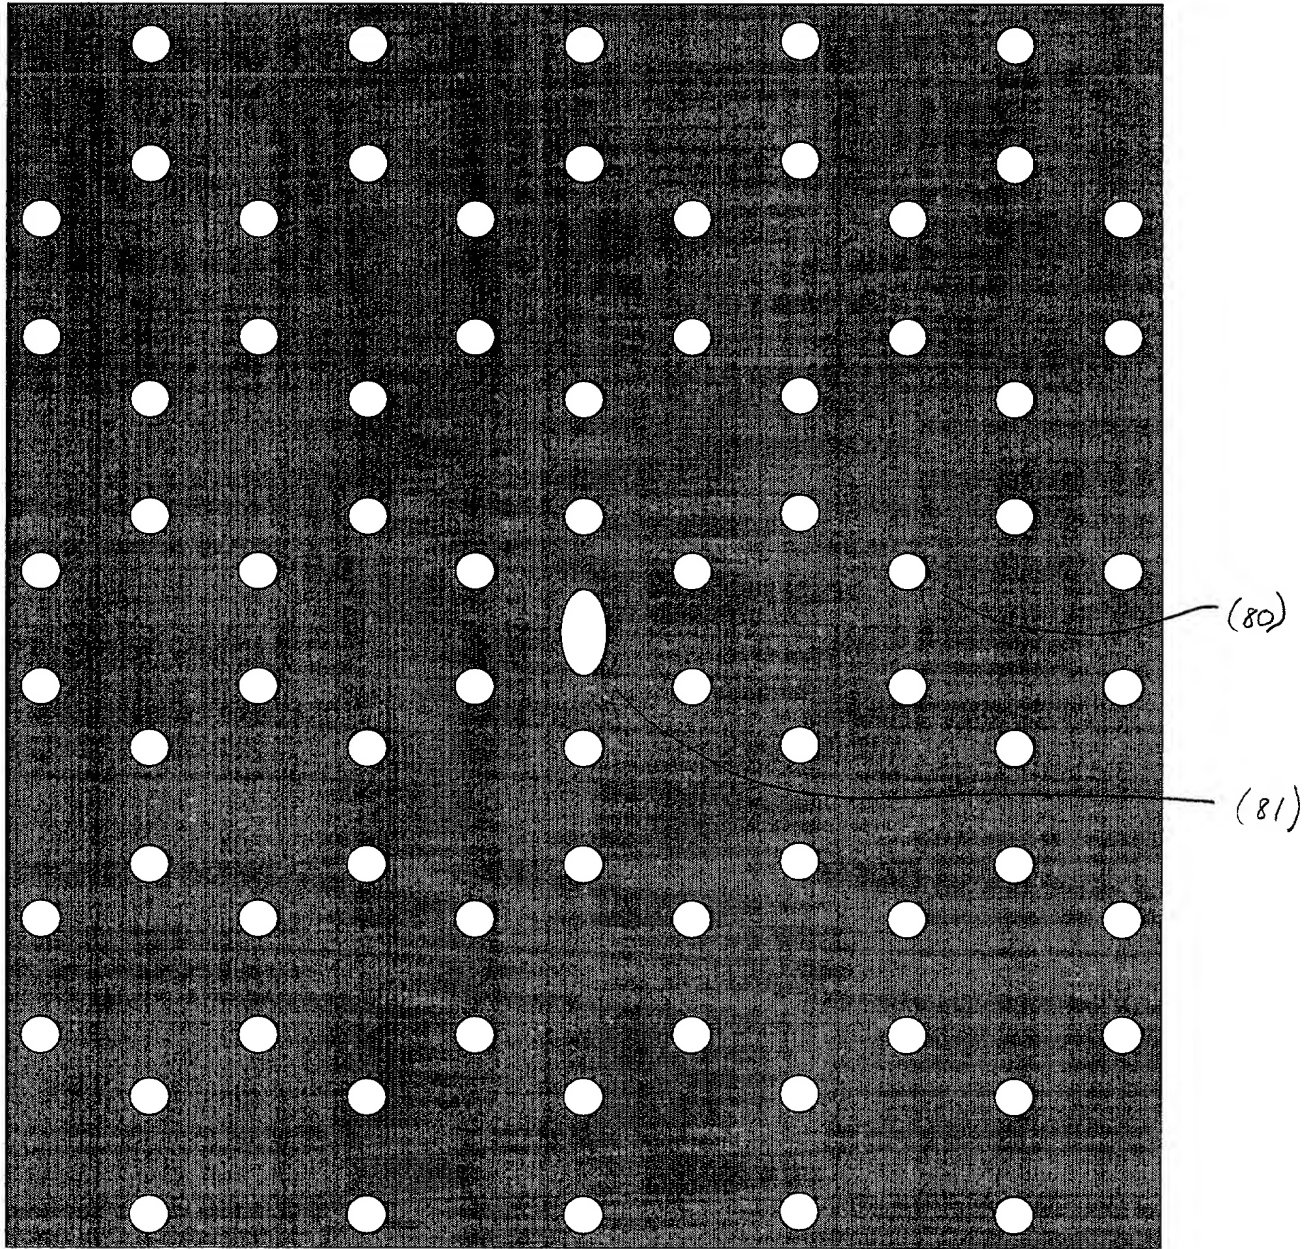


FIG. 74

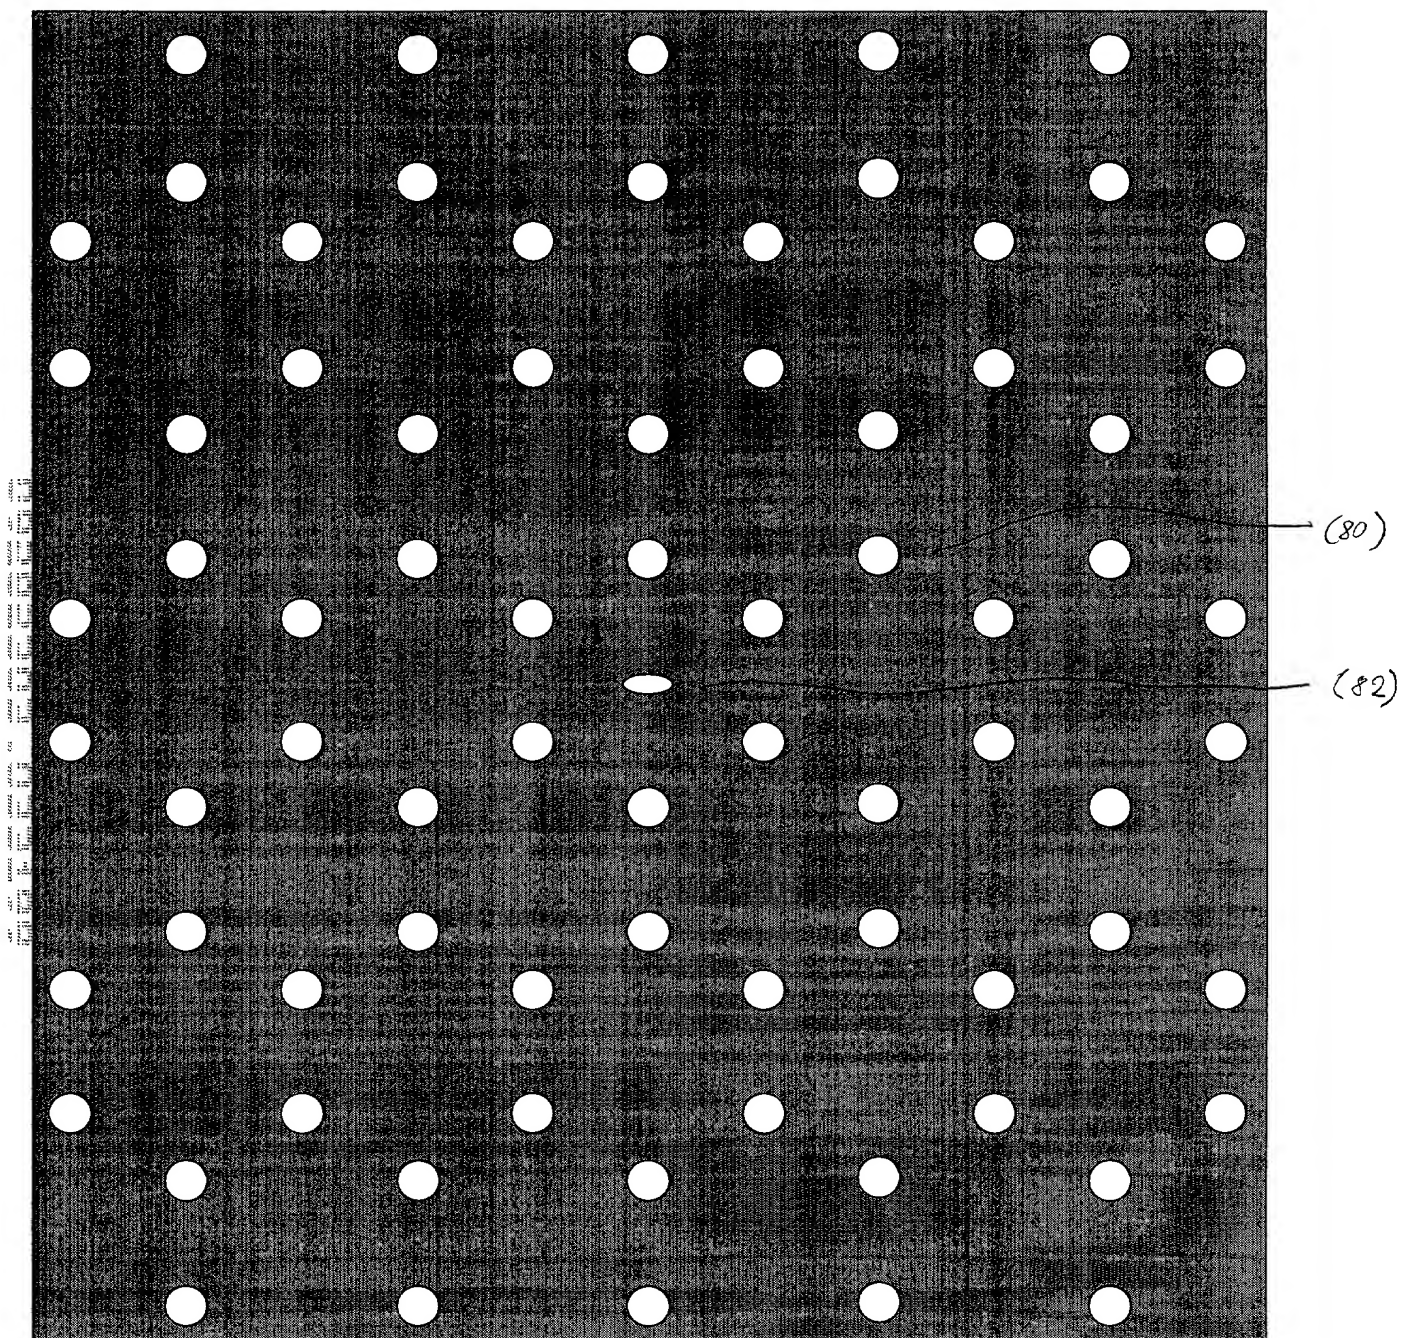


FIG. 75

FIG. 76


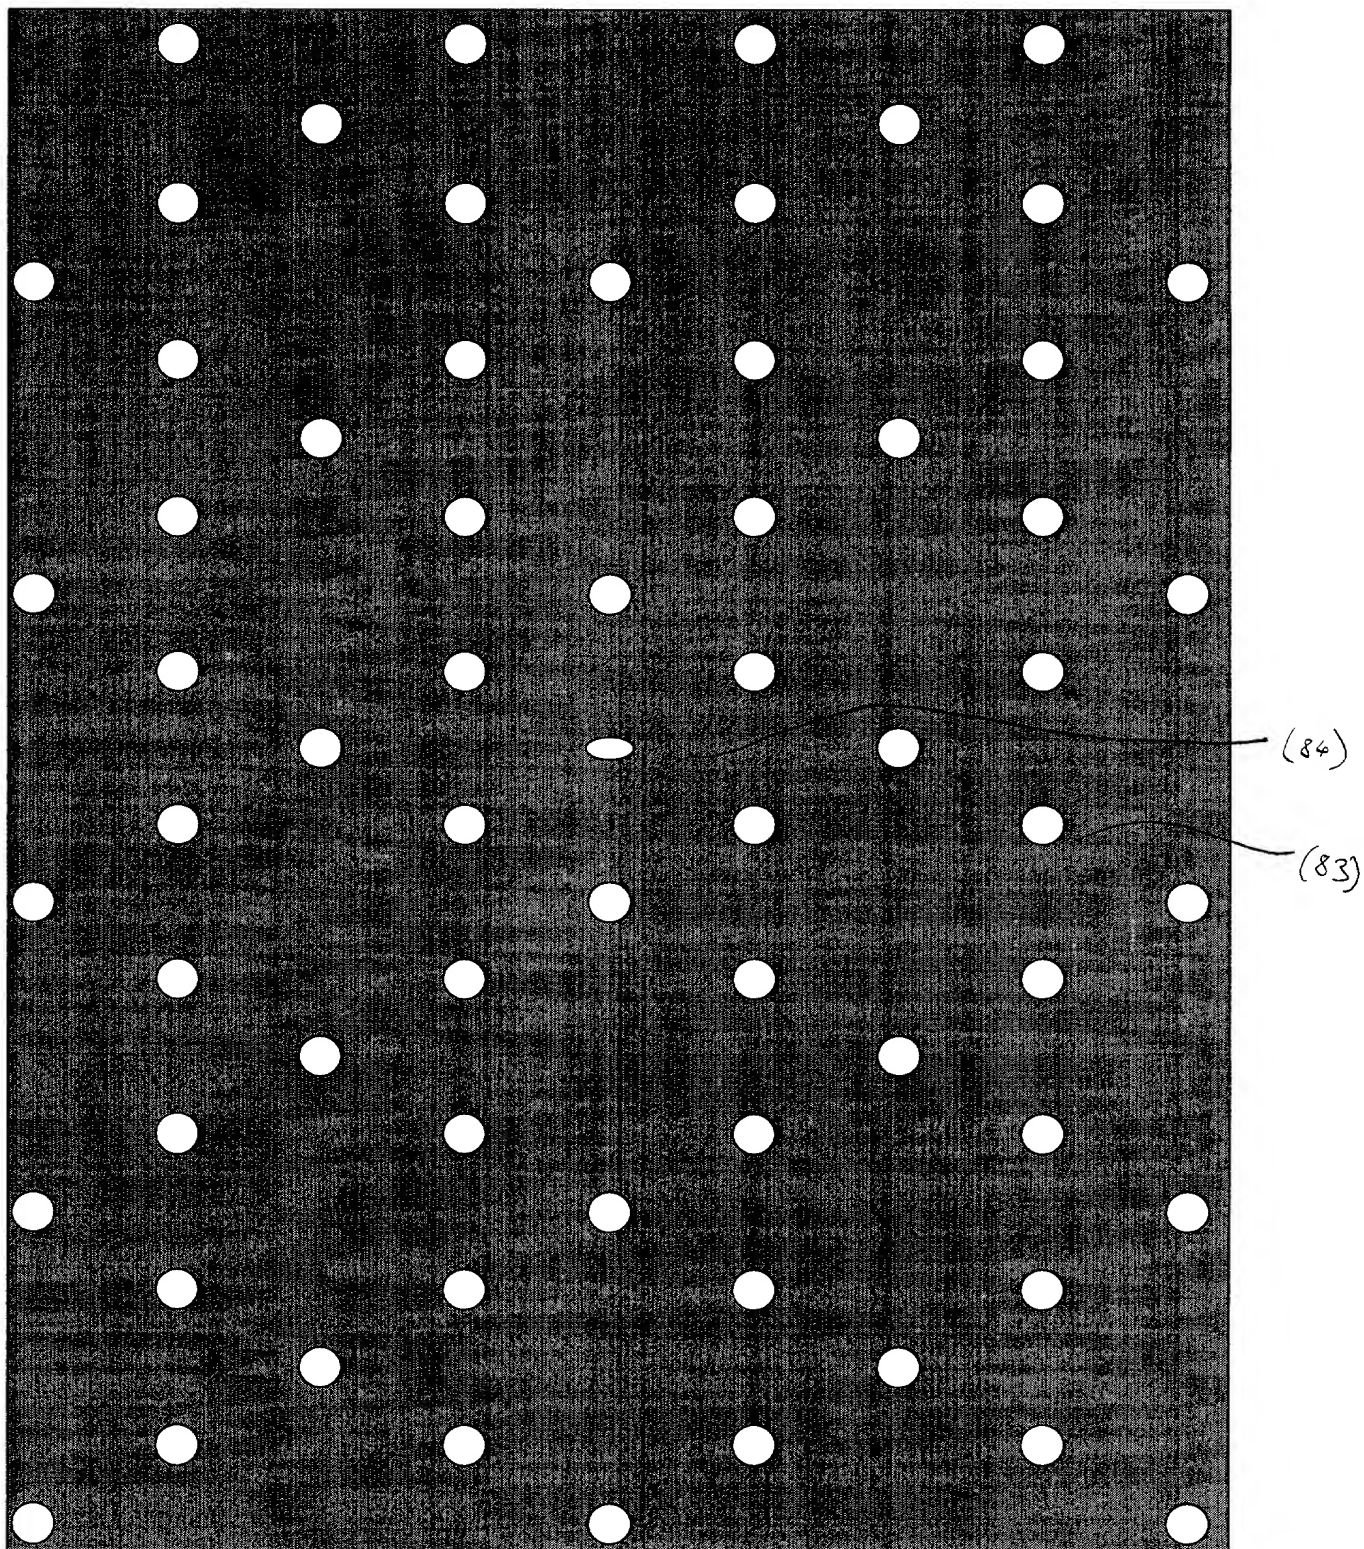


FIG. 76

FIG. 22

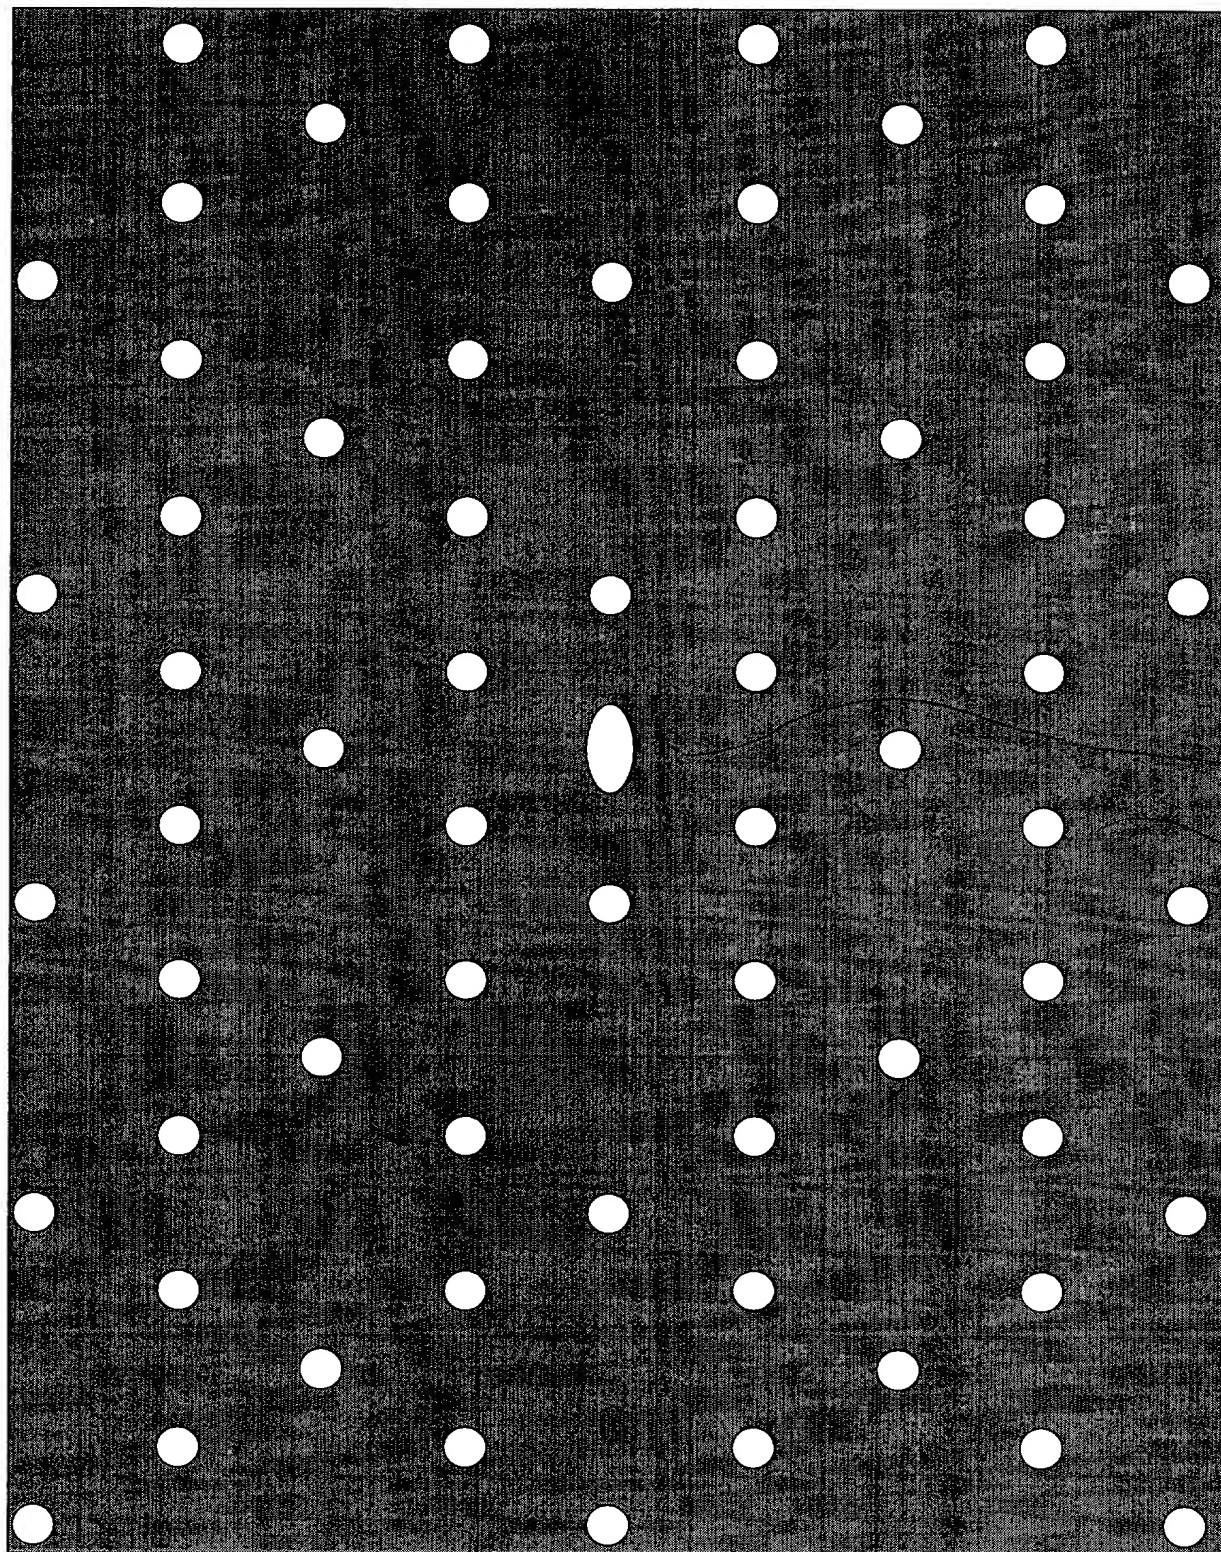

(85)

(83)

FIG. 22


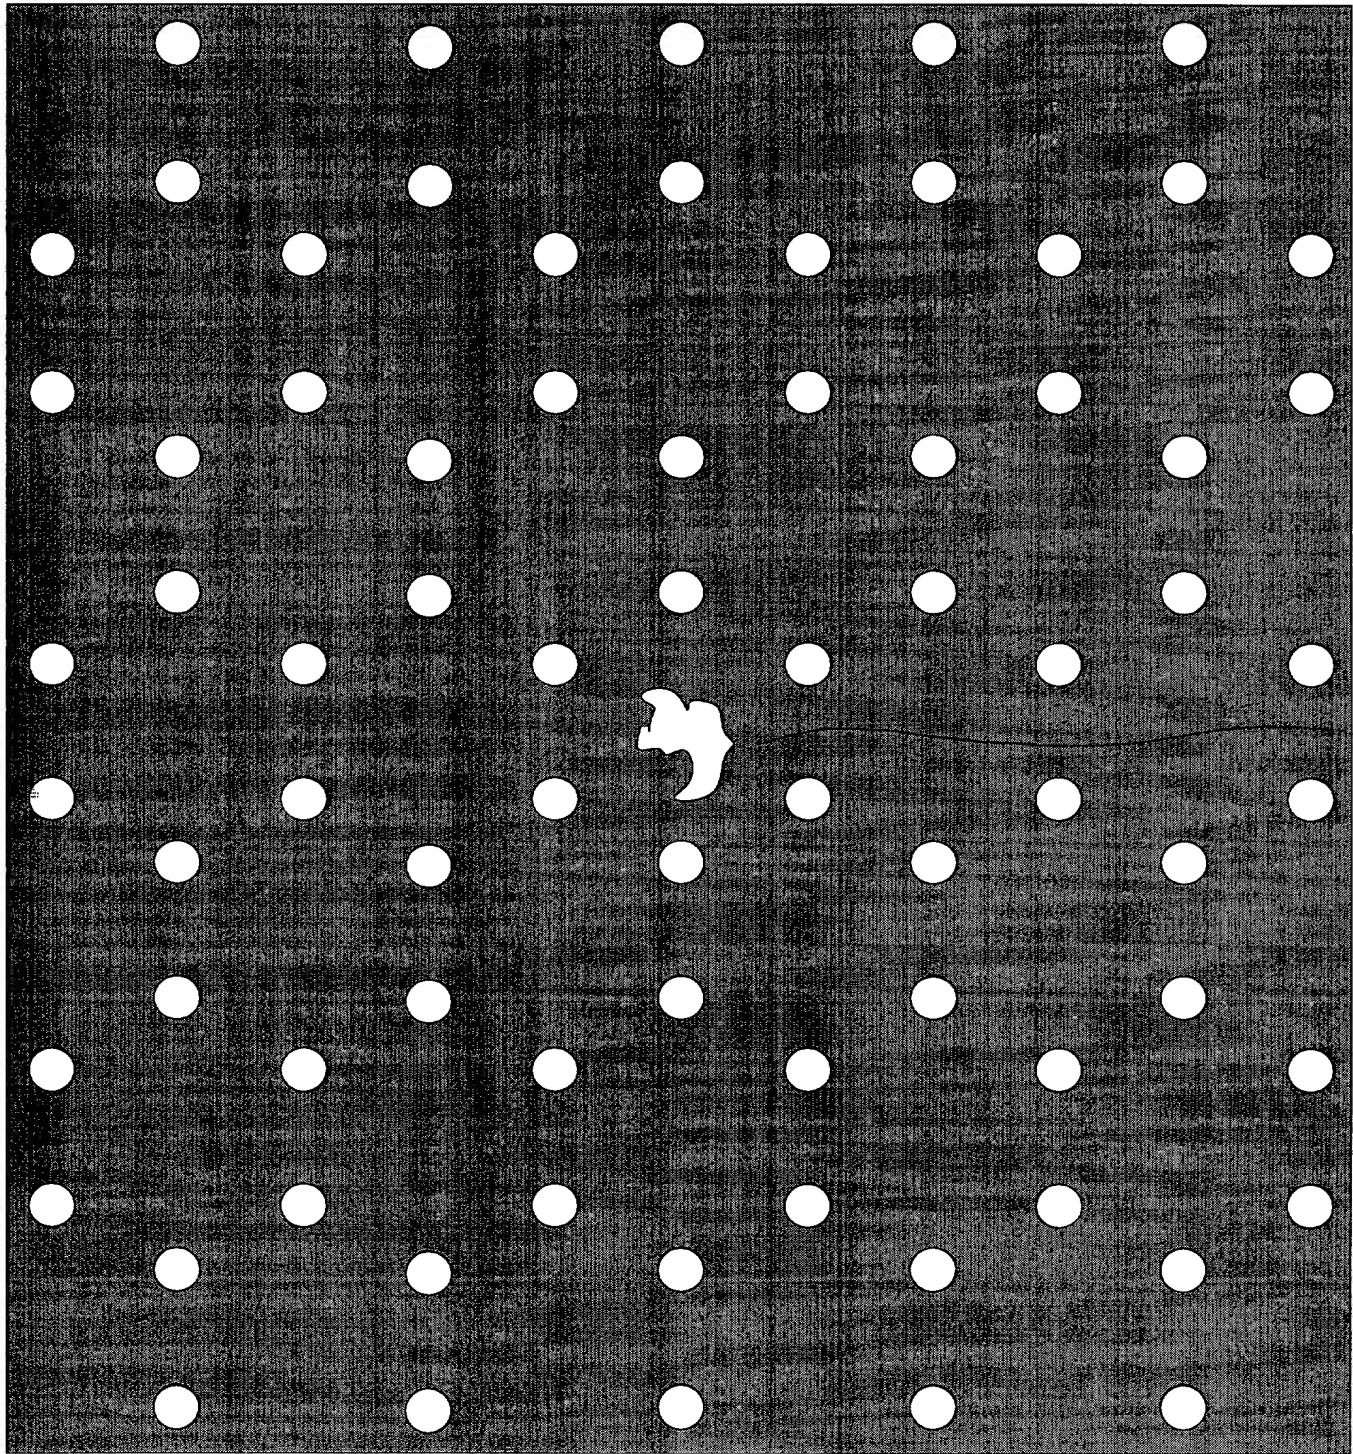


FIG. 78

FIG. 79

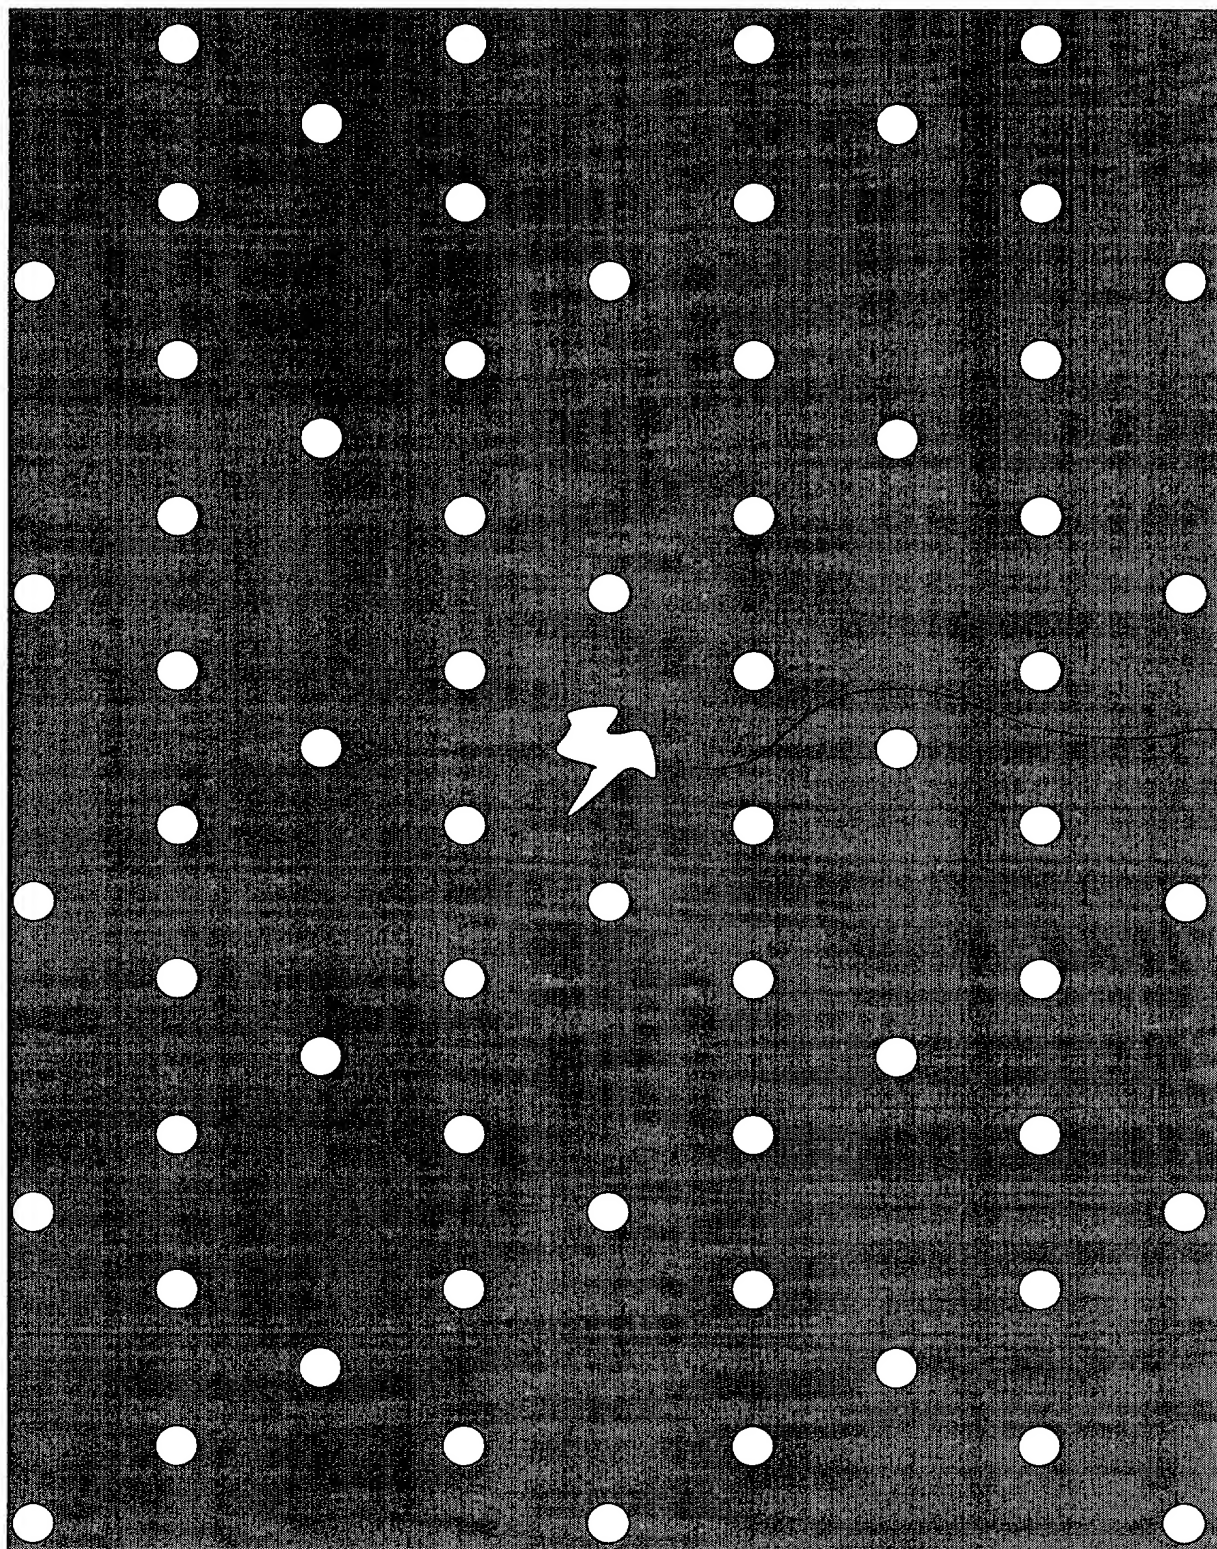

(86)

FIG. 79

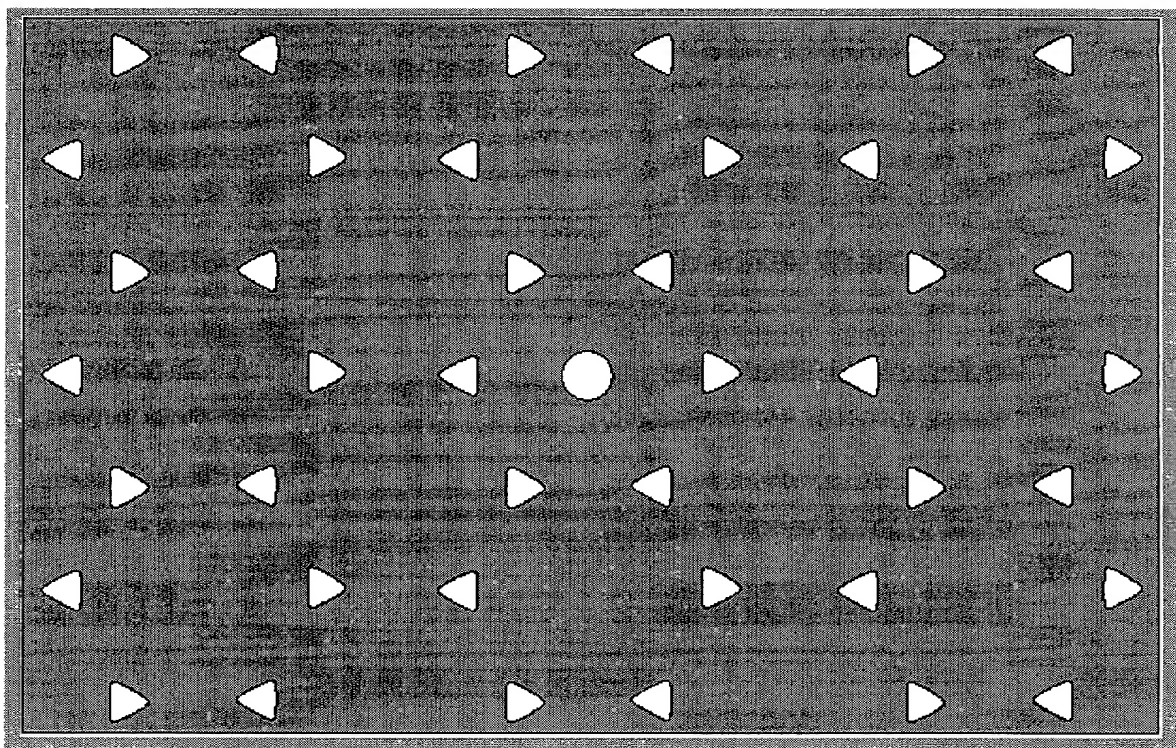


Fig 80

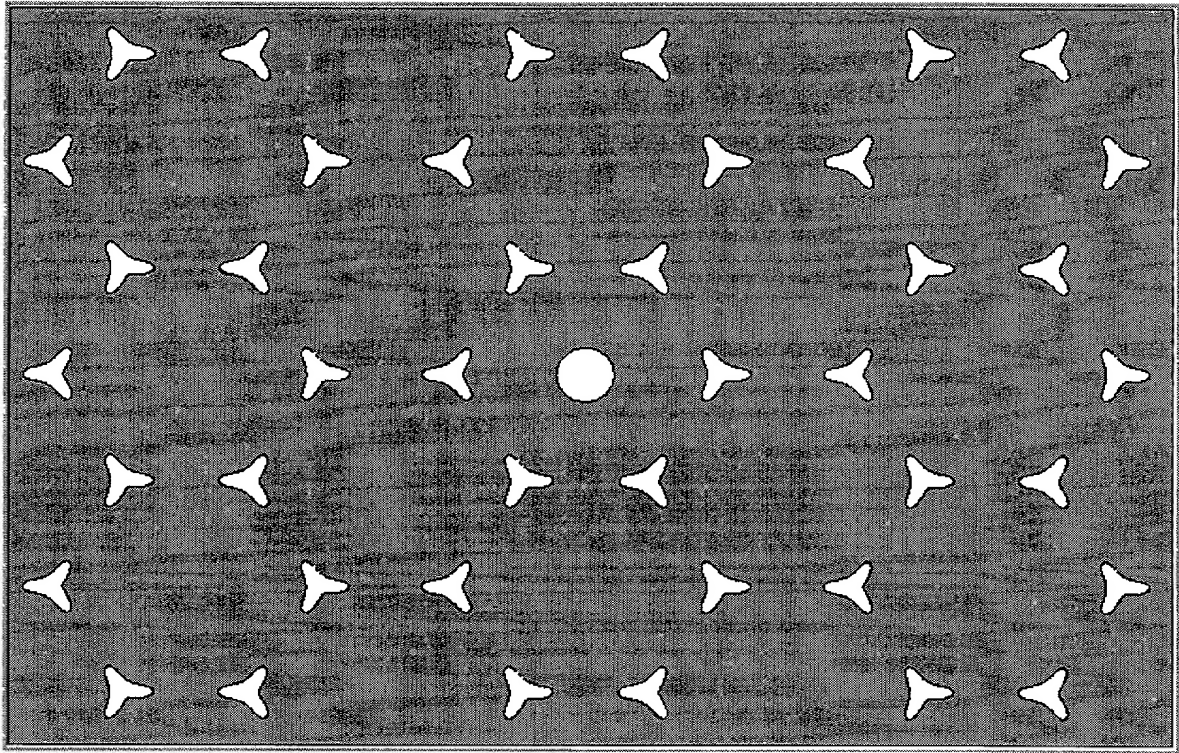


Fig. 81

Fig. 82

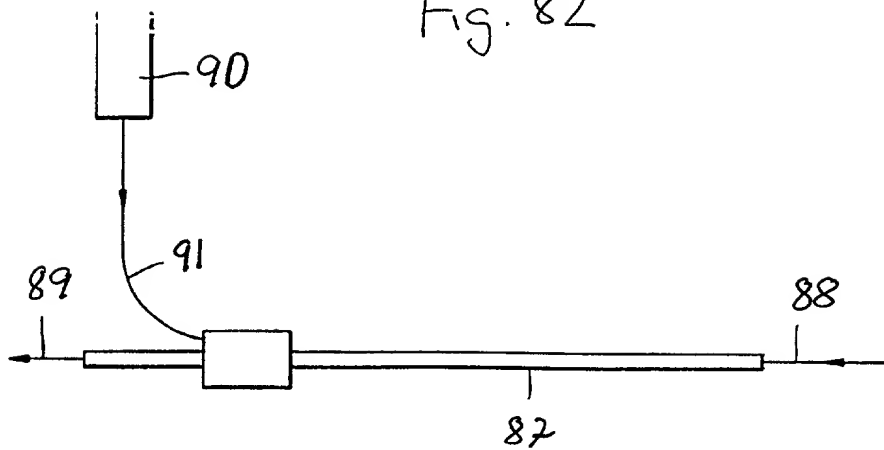


Fig. 83

